

492 / 492P SPECTRUM ANALYZER

**PORTABLE / RACKMOUNT
BENCHTOP
(SN B030000 & UP)**

**REPLACEABLE
ELECTRICAL
PARTS**

TABLE OF CONTENTS

SAFETY SUMMARY	iii
Section 7 REPLACEABLE ELECTRICAL PARTS	7-1
Section 8 DIAGRAMS.....	8-1
Section 9 REPLACEABLE MECHANICAL PARTS	9-1

LIST OF ILLUSTRATIONS

The following figures are located near their associated diagrams in Section 8.

8-1	A16A1—1st LO Interface circuit board	8-25	A64—Deflection Amplifier circuit board
8-2	A18A1—2nd Converter circuit board	8-26	A70—Z Axis circuit board
8-3	A4A1—Phase Gate Input circuit board	8-27	A74—High Voltage circuit board
8-4	A23A2—25 MHz Phase Lock circuit board	8-28	A74A1—High Voltage circuit board
8-5	A23A3—Harmonic Mixer circuit board	8-29	A66—CRT Readout circuit board
8-6	A23A7—829 MHz Second Converter circuit board	8-30	A38—Front Panel circuit board
8-7	A23A4—829 MHz Diplexer circuit board	8-31	A58—Processor circuit board
8-8	A23A6—I.F.Switcher circuit board	8-32	A54—Memory circuit board
8-9	A23A5—829 MHz Amplifier circuit board	8-33	A72—Sweep circuit board
8-10	A32A1—110 I.F. Amplifier circuit board	8-34	A48—Span Attenuator circuit board
8-11	A34A1—110 Mixer/Oscillator circuit board	8-35	A44—1st LO Driver circuit board
8-12	A69A1—VR #1 Mother circuit board	8-36	A42—Preselector Driver circuit board
8-13	A69A2—VR Input circuit board	8-37	A21—Shaper/Bias circuit board
8-14	A69A3—1st Filter Select circuit board	8-38	A46—Center Frequency Control circuit board
8-15	A69A4—10 dB Gain Steps circuit board	8-39	A51—Phase Lock Control circuit board
8-16	A68A1—VR #2 Mother circuit board	8-40	A50A4—Error Amplifier circuit board
8-17	A69A5—20 dB Gain Steps circuit board	8-41	A50A1—Synthesizer circuit board
8-18	A68A3—Band Leveling circuit board	8-42	A50A3—Offset Mixer circuit board
8-19	A68A2—2nd Filter Select circuit board	8-43	A50A5—Controlled Oscillator circuit board
8-20	A68A4—Post VR Amplifier circuit board	8-44	A50A2—Strobe Driver circuit board
8-21	A62—Log Amplifier circuit board	8-45	A30A1—Main Power Supply circuit board
8-22	A40—Leveling circuit board	8-46	A30A2—Fan Drive circuit board
8-23	A61—Digital Storage circuit board	8-47	A76—Accessories Interface circuit board
8-24	A60—Digital Storage Interface circuit board	8-48	A56—GPIB circuit board

SERVICING SAFETY SUMMARY

FOR QUALIFIED SERVICE PERSONNEL ONLY

Do Not Service Alone

Do not perform internal service or adjustment of this product unless another person capable of rendering first aid and resuscitation is present.

Use Care When Servicing With Power On

Dangerous voltages exist at several points in this product. To avoid personal injury, do not touch exposed connections and components while power is on.

Disconnect power before removing protective panels, soldering, or replacing components.

Power Source

This product is intended to operate from a power source that will not apply more than 250 volts rms between the supply conductors or between either supply conductor and ground. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

TERMS

In This Manual

CAUTION statements identify conditions or practices that could result in damage to the equipment or other property.

WARNING statements identify conditions or practices that could result in personal injury or loss of life.

As Marked on Equipment

CAUTION indicates a personal injury hazard not immediately accessible as one reads the marking, or a hazard to property including the equipment itself.

DANGER indicates a personal injury hazard immediately accessible as one reads the marking.

SYMBOLS

In This Manual



This symbol indicates where applicable cautionary or other information is to be found.

As Marked on Equipment



DANGER—High voltage.



Protective ground (earth) terminal.



ATTENTION—refer to manual.

Power Source

This product is intended to operate from a power source that will not apply more than 250 volts rms between the supply conductors or between either supply conductor and ground. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

Grounding the Product

This product is grounded through the grounding conductor of the power cord. To avoid electrical shock, plug the power cord into a properly wired receptacle before connecting to the product input or output terminals. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

Danger Arising From Loss of Ground

Upon loss of the protective-ground connection, all accessible conductive parts (including knobs and controls that may appear to be insulating) can render an electric shock.

Use the Proper Power Cord

Use only the power cord and connector specified for your product.

Use only a power cord that is in good condition.

For detailed information on power cords and connectors, see the General Information and Specifications section in Volume 1 of the 492 Service manual.

Refer cord and connector changes to qualified service personnel.


Use the Proper Fuse

To avoid fire hazard, use only the fuse specified in the parts list for your product, and which is identical in type, voltage rating, and current rating.

Refer fuse replacement to qualified service personnel.

Do Not Operate in Explosive Atmospheres

To avoid explosion, do not operate this product in an atmosphere of explosive gases unless it has been specifically certified for such operation.

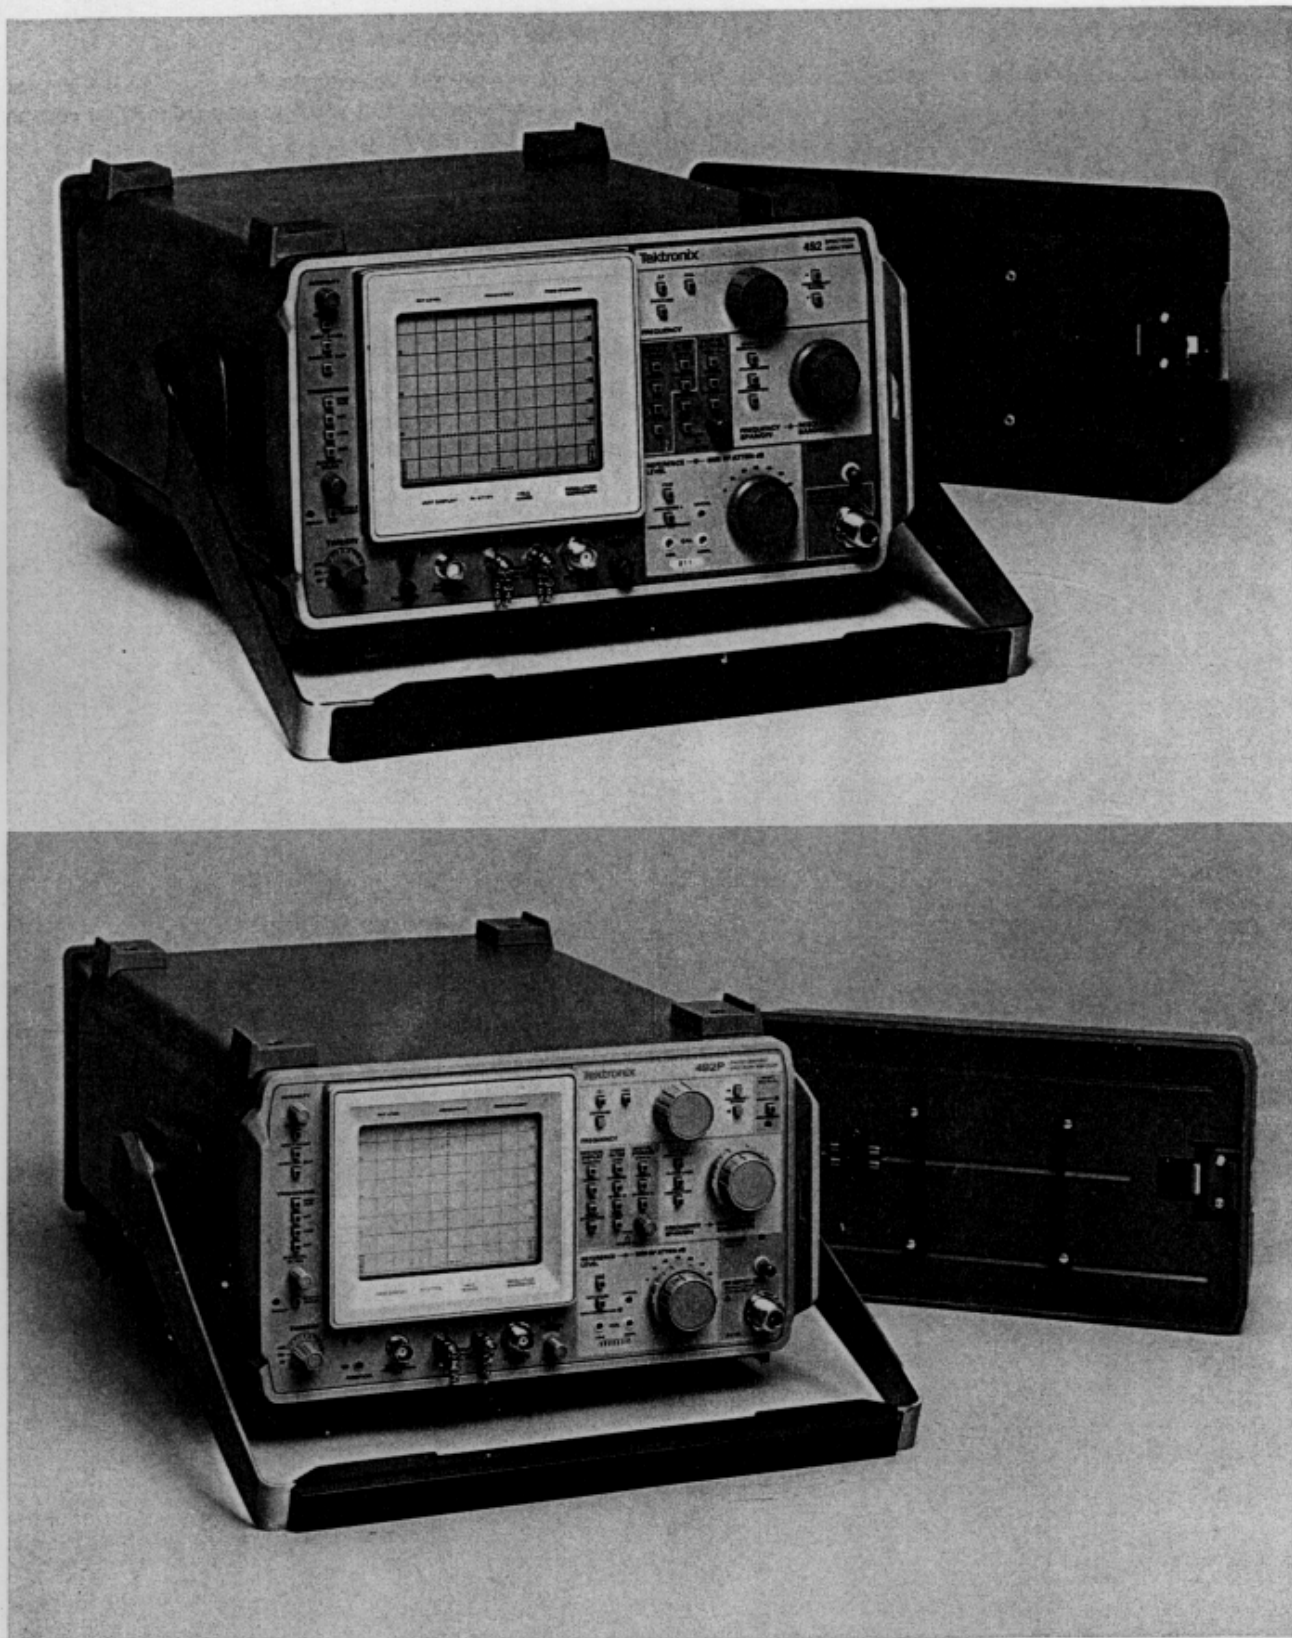

The 492/492P Spectrum Analyzer.

REPLACEABLE ELECTRICAL PARTS

PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER


The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

ABBREVIATIONS


Abbreviations conform to American National Standard Y1.1.

COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:



Read: Resistor 1234 of Assembly 23

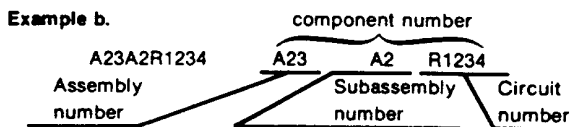

Read: Resistor 1234 of Subassembly 2 of Assembly 23

TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)

Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

F replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

<u>N . Code</u>	<u>Manufacturer</u>	<u>Address</u>	<u>City, State, Zip</u>
000AX	BUEHLER PRODUCTS INC.	PO BOX A,HIGHWAY 70 EAST	KINGSTON, NC 28501
000FG	RIFA WORLD PRODUCTS INC.	7625 BUSH LAKE RD P.O. BOX 35263	MINNEAPOLIS, MN 55435
0 FJ	MARCOM SWITCHES INC.	67 ALBANY STREET	CAZENOVIA, N.Y. 13035
000LI	TOPTRON CORP		TOKYO, JAPAN
00779	AMP, INC.	P O BOX 3608	HARRISBURG, PA 17105
0^53	SANGAMO ELECTRIC CO., S. CAROLINA DIV.	P O BOX 128	PICKENS, SC 29671
0 21	ALLEN-BRADLEY COMPANY	1201 2ND STREET SOUTH	MILWAUKEE, WI 53204
0 81	TRW ELECTRONIC COMPONENTS, SEMICONDUCTOR OPERATIONS	14520 AVIATION BLVD.	LAWNDALE, CA 90260
01295	TEXAS INSTRUMENTS, INC., SEMICONDUCTOR GROUP	P O BOX 5012, 13500 N CENTRAL EXPRESSWAY	DALLAS, TX 75222
0 11	SPECTROL ELECTRONICS CORPORATION	17070 EAST GALE AVENUE	CITY OF INDUSTRY, CA 91745
02114	FERROXCUBE CORPORATION	PO BOX 359, MARION ROAD	SAUGERTIES, NY 12477
02735	RCA CORPORATION, SOLID STATE DIVISION	ROUTE 202	SOMERVILLE, NY 08876
0^08	GENERAL ELECTRIC COMPANY, SEMI-CONDUCTOR PRODUCTS DEPARTMENT	ELECTRONICS PARK	SYRACUSE, NY 13201
0 14	BUSSMAN MFG., DIV. OF MCGRAW EDISON CO.	502 EARTH CITY PLAZA	EARTH CITY, MO 63045
04222	AVX CERAMICS, DIVISION OF AVX CORP.	P O BOX 867, 19TH AVE. SOUTH	MYRTLE BEACH, SC 29577
04713	MOTOROLA, INC., SEMICONDUCTOR PROD. DIV.	5005 E MCDOWELL RD,PO BOX 20923	PHOENIX, AZ 85036
0 97	UNION CARBIDE CORPORATION, MATERIALS SYSTEMS DIVISION	11901 MADISON AVENUE	CLEVELAND, OH 44101
00028	GENERAL INSTRUMENT CORP ELECTRONIC SYSTEMS DIV.	600 W JOHN ST.	HICKSVILLE LI, NY 11802
0^65	PRECISION MONOLITHICS INC.	1500 SPACE PARK DR.	SANTA CLARA, CA 95050
0 88	KELVIN ELECTRIC COMPANY	5907 NOBLE AVENUE	VAN NUYS, CA 91411
0 63	FAIRCHILD SEMICONDUCTOR, A DIV. OF FAIRCHILD CAMERA AND INSTRUMENT CORP.	464 ELLIS STREET	MOUNTAIN VIEW, CA 94042
08806	GENERAL ELECTRIC CO., MINIATURE LAMP PRODUCTS DEPARTMENT	NELA PARK	CLEVELAND, OH 44112
1 54	SIEMENS CORPORATION, COMPONENTS GROUP	8700 E THOMAS RD, P O BOX 1390	SCOTTSDALE, AZ 85252
12969	UNITRODE CORPORATION	580 PLEASANT STREET	WATERTOWN, MA 02172
14433	ITT SEMICONDUCTORS	3301 ELECTRONICS WAY P O BOX 3049	WEST PALM BEACH, FL 33402
1 52	MICRO SEMICONDUCTOR CORP.	2830 E FAIRVIEW ST.	SANTA ANA, CA 92704
1 52	ELECTRO CUBE INC.	1710 S. DEL MAR AVE.	SAN GABRIEL, CA 91776
14936	GENERAL INSTRUMENT CORP., SEMICONDUCTOR PRODUCTS GROUP	P.O. BOX 600,600 W. JOHN ST.	HICKSVILLE, NY 11802
1 38	ITT SEMICONDUCTORS, A DIVISION OF INTER NATIONAL TELEPHONE AND TELEGRAPH CORP.	P.O. BOX 168, 500 BROADWAY	LAWRENCE, MA 01841
13954	RODAN INDUSTRIES, INC.	2905 BLUE STAR ST.	ANAHEIM, CA 92806
15801	FENWAL ELECTRONICS, DIV. OF KIDDE WALTER AND CO., INC.	63 FOUNTAIN ST.	FRAMINGHAM, MA 01701
1 40	ALPHA INDUSTRIES, INC.	20 SYLVAN RD.	WOBURN, MA 01801
1 56	SILICONIX, INC.	2201 LAURELWOOD DRIVE	SANTA CLARA, CA 95054
18203	ENGELMANN MICROWAVE CO.	SKYLINE DR.	MONTVILLE, NJ 07045
18324	SIGNETICS CORP.	811 E. ARQUES	SUNNYVALE, CA 94086
1 12	VISHAY RESISTOR PRODUCTS DIV.		
	VISHAY INTERTECHNOLOGY INC.	68 LINCOLN HWY	MALVERN, PA 19355
13936	ILLINOIS TOOL WORKS, INC. PAKTRON DIV.	900 FOLLIN LANE, SE	VIENNA, VA 22180
20932	EMCON DIV OF ILLINOIS TOOL WORKS INC.	11620 SORRENTO VALLEY RD P O BOX 81542	SAN DIEGO, CA 92121
2 77	CIR-O-TEK INC.	10504 WHEATLEY ST.	KINGSTON, MD 20795
2 29	SOLITRON DEVICES, INC., SEMICONDUCTOR GROUP	8808 BALBOA AVENUE	SAN DIEGO OPERS, CA 92123
22526	BERG ELECTRONICS, INC.	YOUK EXPRESSWAY	NEW CUMBERLAND, PA 17070
2 11	GRIGSBY-BARTON INC.	3800 INDUSTRIAL DRIVE	ROLLING MEADOWS, IL 60008
2 35	ANALOG DEVICES INC.	RT 1 INDUSTRIAL PK,P O BOX 280	NORWOOD, MA 02062
24946	CORNING GLASS WORKS, ELECTRONIC COMPONENTS DIVISION	550 HIGH STREET	BRADFORD, PA 16701
24931	SPECIALITY CONNECTOR CO., INC.	2620 ENDRESS PLACE	GREENWOOD, IN 46142
2 33	AMPEREX ELECTRONIC CORP., SEMICONDUCTOR AND MICROCIRCUITS DIV.	PROVIDENCE PIKE	SLATERSVILLE, RI 02876
26769	NCI INC.	5900 AUSTRALIAN AVENUE	WEST PALM BEACH, FL 33407
26805	OMNI SPECTRA INC., MICROWAVE CONNECTOR DIV.	140 FOURTH AVE	WALTHAM, MA 02154
2 12	MICRO DEVICES, CORPORATION	1881 SOUTHLAND BLVD.	DAYTON, OHIO 45439
2 14	NATIONAL SEMICONDUCTOR CORP.	2900 SEMICONDUCTOR DR.	SANTA CLARA, CA 95051

CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip
27264	MOLEX PRODUCTS CO.	5224 KATRINE AVE.	DOWNERS GROVE, IL 60515
32293	INTERSIL, INC.	10900 N. TANTAU AVE.	CUPERTINO, CA 95014
32997	BOURNS, INC., TRIMPOT PRODUCTS DIV.	1200 COLUMBIA AVE.	RIVERSIDE, CA 92507
33095	SPECTRUM CONTROL, INC.	152 E MAIN STREET	FAIRVIEW, PA 16415
33096	COLORADO CRYSTAL CORPORATION	2303 W 8TH STREET	LOVELAND, CO 80537
34335	ADVANCED MICRO DEVICES	901 THOMPSON PL.	SUNNYVALE, CA 94086
34371	HARRIS SEMICONDUCTOR, DIV. OF HARRIS CORPORATION	P. O. BOX 883	MELBOURNE, FL 32901
50101	GHZ DEVICES, INC.	16 MAPLE ROAD	SOUTH CHELMSFORD, MA 01824
50434	HEWLETT-PACKARD COMPANY	640 PAGE MILL ROAD	PALO ALTO, CA 94304
50438	HEWLETT-PACKARD CO., DATA SYSTEMS DIV.	11000 WOLFE RD.	CUPERTINO, CA 95074
50558	ELECTRONIC CONCEPTS, INC.	526 INDUSTRIAL WAY WEST	EATONTOWN, NJ 07724
50667	DYNATECH/U/Z INC.	9522 WEST JEFFERSON BLVD.	CULVER CITY, CA 90230
51181	KEYTRONICS INC.	707 NORTH ST.	ENDICOTT, NY 13760
51642	CENTRE ENGINEERING INC.	2820 E COLLEGE AVENUE	STATE COLLEGE, PA 16801
51984	NEC AMERICA INC. RADIO AND TRANSMISSION DIV.	2990 TELESTAR CT. SUITE 212	FALLS CHURCH, VA 22042
52306	HIGH VOLTAGE DEVICES, INC.	7485 AVENUE 304	VISALIA, CA 93277
53184	XCITON CORPORATION	5 HEMLOCK STREET	LATHAM, NY 12110
53944	ELT INC., GLOW LITE DIVISION	BOX 698	PAULS VALLEY, OK 73075
54473	MATSUSHITA ELECTRIC, CORP. OF AMERICA	1 PANASONIC WAY	SECAUCUS, NJ 07094
55680	NICHICON/AMERICA/CORP.	6435 N PROESEL AVENUE	CHICAGO, IL 60645
56289	SPRAGUE ELECTRIC CO.	87 MARSHALL ST.	NORTH ADAMS, MA 01247
57668	R-OHM CORP.	16931 MILLIKEN AVE.	IRVINE, CA 92713
59660	TUSONIX INC.	2155 N FORBES BLVD	TUCSON, AZ 85705
59821	CENTRALAB INC	7158 MERCHANT AVE	EL PASO, TX 79915
71034	SUB NORTH AMERICAN PHILIPS CORP		
71400	BLILEY ELECTRIC CO.	2545 W. GRANDVIEW BLVD.	ERIE, PA 16512
	BUSSMAN MFG., DIVISION OF MCGRAW-EDISON CO.	2536 W. UNIVERSITY ST.	ST. LOUIS, MO 63107
72982	ERIE TECHNOLOGICAL PRODUCTS, INC.	644 W. 12TH ST.	ERIE, PA 16512
73138	BECKMAN INSTRUMENTS, INC., HELIPOT DIV.	2500 HARBOR BLVD.	FULLERTON, CA 92634
73899	JFD ELECTRONICS COMPONENTS CORP.	PINETREE ROAD	OXFORD, NC 27565
74276	SIGNALITE DIV., GENERAL INSTRUMENT CORP.	1933 HECK AVE.	NEPTUNE, NJ 07753
74970	JOHNSON, E. F., CO.	299 10TH AVE. S. W.	WASECA, MN 56093
75042	TRW ELECTRONIC COMPONENTS, IRC FIXED RESISTORS, PHILADELPHIA DIVISION	401 N. BROAD ST.	PHILADELPHIA, PA 19108
75378	CTS KNIGHTS, INC.	400 REIMANN AVE.	SANDWICH, IL 60548
75915	LITTELFUSE, INC.	800 E. NORTHWEST HWY	DES PLAINES, IL 60016
76493	BELL INDUSTRIES, INC., MILLER, J. W., DIV.	19070 REYES AVE., P O BOX 5825	COMPTON, CA 90224
78488	STACKPOLE CARBON CO.		ST. MARYS, PA 15857
80009	TEKTRONIX, INC.	P O BOX 500	BEAVERTON, OR 97077
80031	ELECTRA-MIDLAND CORP., MEPCO DIV.	22 COLUMBIA ROAD	MORRISTOWN, NJ 07960
83891	PIEZO MFG. CORP.	P. O. BOX 5644	FORT LAUDERDALE, FL 33309
84411	TRW ELECTRONIC COMPONENTS, TRW CAPACITORS	112 W. FIRST ST.	OGALLALA, NE 69153
87034	ILLUMINATED PRODUCTS INC., A SUB OF OAK INDUSTRIES, INC.	2620 SUSAN ST, PO BOX 11930	SANTA ANA, CA 92711
90201	MALLORY CAPACITOR CO., DIV. OF P. R. MALLORY AND CO., INC.	3029 E. WASHINGTON STREET	
	JOHANSON MFG. COMPANY	P. O. BOX 372	INDIANAPOLIS, IN 46206
91293	DALE ELECTRONICS, INC.	P O BOX 329	BOONTON, NJ 07005
91637	REPUBLIC ELECTRONICS CORPORATION	P. O. BOX 609	COLUMBUS, NE 68601
93958	GORDOS CORPORATION	176 E 7TH STREET	PATERSON, NJ 07524
95348	SAN FERNANDO ELECTRIC MFG CO	250 GLENWOOD AVENUE	BLOOMFIELD, NJ 07003
96733	SEAELECTRO CORP.	1501 FIRST ST	
		SAN FERNANDO CA 91341	
98291		225 HOYT	MAMARONECK, NY 10544

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
AT10	119-1007-00	B030000	B041979	ATTENUATOR,VAR:0-60DB IN 10DB STEPS	80009	119-1007-00
AT10	119-1007-03	B041980	B042749	ATTENUATOR,VAR:0-60DB IN 10DB STEPS	80009	119-1007-03
AT10	119-1007-05	B042750		ATTENUATOR,VAR.:0-60DB IN 10DB STEPS	50667	OBD
AT11	015-1053-00			ATTENUATOR,FXD:3DB	26805	2082-4182-03
AT11	-----			(OPTION 01 ONLY)		
AT12	015-1053-00			ATTENUATOR,FXD:3DB	26805	2082-4182-03
A10	119-1061-00			LIMITER ASSY:2GHZ	80009	119-1061-00
A10	-----			(OPTION 01 ONLY)		
A11	119-1164-00			BIAS RETURN:	80009	119-1164-00
	-----			(OPTION 03 ONLY)		
A12	119-1017-00			FIRST CONV ASSY:	80009	119-1017-00
A12A1	155-0189-01			MICROCIRCUIT,LI:DUAL DIODE W/HOUSING	80009	155-0189-01
A13	119-1019-00			POWER DIV ASSY:	80009	119-1019-00
A14	119-1095-00			DIPLEXER ASSY:	80009	119-1095-00
A16	119-0752-01			OSCILLATOR:2.0 TO 6.1 GHZ,W/CAN & CKT	80009	119-0752-01
A16A1	670-5540-00			CKT BOARD ASSY:1ST L.O. INTERFACE	80009	670-5540-00
A18	119-1096-00	B030000	B041299	SEC CONV ASSY:2072MHZ	80009	119-1096-00
A18	119-1096-01	B041300		SEC CONV ASSY:2072MHZ	80009	119-1096-01
A18A1	-----			(NONREPLACEABLE SUBPART OF A18)		
A20	119-1022-02	B030000	B039999	OSCILLATOR:2182.5MHZ	80009	119-1022-02
A20A1	-----	B030000	B039999	(NONREPLACEABLE SUBPART OF A20)		
A21	670-5512-02	B030000	B031031	CKT BOARD ASSY:SHAPER/BIAS	80009	670-5512-02
A21	-----			(492 ONLY)		
A21	670-5512-04	B031032	B039999	CKT BOARD ASSY:SHAPER/BIAS	80009	670-5512-04
A21	-----			(492 ONLY)		
A21	670-5512-02	B030000	B031536	CKT BOARD ASSY:SHAPER/BIAS	80009	670-5512-02
A21	-----			(492P ONLY)		
A21	670-5512-04	B031537	B039999	CKT BOARD ASSY:SHAPER/BIAS	80009	670-5512-04
A21	-----			(492P ONLY)		
A22	650-0296-00	B040000	B041999	2ND LO ASSY:PHASE LOCK	80009	650-0296-00
A22	650-0296-01	B042000		2ND LO ASSY:PHASE LOCK	80009	650-0296-01
A22A1	670-7078-00	B040000	B042184	CKT BOARD ASSY:14-22MHZ PHASE LOCK	80009	670-7078-00
A22A1	670-7078-01	B042185		CKT BOARD ASSY:14-22MHZ PHASE LOCK	80009	670-7078-01
A22A2	119-1457-00	B040000	B041999	PH LOCK LO ASSY:	80009	119-1457-00
A22A2	119-1457-01	B042000		PH LOCK LO ASSY:	80009	119-1457-01
A22A2A1	670-7395-00	B040000	B041999	CKT BOARD ASSY:2182MHZ MICROSTRIP OSC	80009	670-7395-00
A22A2A1	670-7395-01	B042000		CKT BOARD ASSY:2182MHZ MICROSTRIP OSC	80009	670-7395-01
A22A2A2	670-7076-00	B040000		CKT BOARD ASSY:220MHZ REFERENCE	80009	670-7076-00
A22A2A3	670-7079-00	B040000		CKT BOARD ASSY:2200MHZ REFERENCE MIXER	80009	670-7079-00
A23	119-1131-01	B030000	B041819	SEC CON ASSY:829MHZ	80009	119-1131-01
A23	119-1131-02	B041820		SEC CON ASSY:829MHZ	80009	119-1131-02
A23A1	670-5936-00			CKT BOARD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A2	670-5937-02	B030000	B041819	CKT BOARD ASSY:25MHZ PHASE LOCK	80009	670-5937-02
A23A2	670-5937-03	B041820		CKT BOARD ASSY:25MHZ PHASE LOCK	80009	670-5937-03
A23A3	670-6016-00			CKT BOARD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
A23A4	670-6256-00			CKT BOARD ASSY:829MHZ DIPLEXER	80009	670-6256-00
A23A5	670-6255-01			CKT BOARD ASSY:829MHZ AMPLIFIER	80009	670-6255-01
A23A6	670-6015-01			CKT BOARD ASSY:110MHZ IF SELECT	80009	670-6015-01
A23A7	670-6224-00			CKT BOARD ASSY:829MHZ SECOND CONVERTER	80009	670-6224-00
A24	119-1010-00			HYBRID CKT ASSY:PHASE GATE DETECTOR	80009	119-1010-00
A24	-----			(OPTION 03 ONLY)		

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A24A1	670-5957-00			CKT BOARD ASSY:PHASE GATE INPUT	80009	670-5957-00
A24A1	-----			(OPTION 03 ONLY)		
A28	670-5561-01			CKT BOARD ASSY:MAIN MOTHER	80009	670-5561-01
A30	621-0488-00			POWER SUPPLY:HIGH VOLTAGE	80009	621-0488-00
A30	-----			(492 ONLY)		
A30	621-0481-01			POWER SUPPLY:	80009	621-0481-01
A30	-----			(492P ONLY)		
A30	621-0483-00			POWER SUPPLY:HIGH VOLTAGE	80009	621-0483-00
A30	-----			(492 OPTION 30,31,32 ONLY)		
A30	621-0485-00			POWER SUPPLY:HIGH VOLTAGE	80009	621-0485-00
A30	-----			(492P OPTION 30,31,32 ONLY)		
A30A1	670-5564-01	B030000	B041454	CKT BOARD ASSY:MAIN POWER SUPPLY	80009	670-5564-01
A30A1	670-5564-02	B041455		CKT BOARD ASSY:MAIN POWER SUPPLY	80009	670-5564-02
A30A2	670-5933-00	B030000	B031618	CKT BOARD ASSY:FAN DRIVE	80009	670-5933-00
A30A2	670-7226-00	B031619		CKT BOARD ASSY:FAN DRIVE	80009	670-7226-00
A30A57	670-5556-00			CKT BOARD ASSY:GPIB INTERFACE	80009	670-5556-00
A30A57	-----			(492P ONLY)		
A30A76	670-5558-01			CKT BOARD ASSY:ACCESSORIES INTERFACE	80009	670-5558-01
A32	119-1015-00			FILTER,AMPL:110MHZ	80009	119-1015-00
A32A1	670-5525-01			CKT BOARD ASSY:110 I.F. AMPLIFIER	80009	670-5525-01
A34	119-1023-00	B030000	B041449	OSC/MIXER ASSY:100MHZ	80009	119-1023-00
A34	-----			(492 ONLY)		
A34	119-1023-01	B041450		OSC/MIXER ASSY:100MHZ	80009	119-1023-01
A34	-----			(492 ONLY)		
A34	119-1023-00	B030000	B041659	OSC/MIXER ASSY:100MHZ	80009	119-1023-00
A34	-----			(492P ONLY)		
A34	119-1023-01	B041660		OSC/MIXER ASSY:100MHZ	80009	119-1023-01
A34	-----			(492P ONLY)		
A34A1	670-5526-00	B030000	B041449	CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-00
A34A1	670-5526-02	B041450		CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-02
A34A1	670-5526-00	B030000	B041659	CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-00
A34A1	-----			(492P ONLY)		
A34A1	670-5526-02	B041660		CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-02
A34A1	-----			(492P ONLY)		
A34A2	670-6204-00			CKT BOARD ASSY:100MHZ L/O REGULATOR	80009	670-6204-00
A38	670-7050-00			CKT BOARD ASSY:FRONT PANEL	80009	670-7050-00
A40	670-5539-01			CKT BOARD ASSY:VIDEO PROCESSOR	80009	670-5539-01
A42	670-5552-03			CKT BOARD ASSY:PRESELECTOR DRIVER	80009	670-5552-03
A42	-----			(OPTION 01 ONLY)		
A44	670-5551-03	B030000	B041844	CKT BOARD ASSY:1ST L.O.DRIVER	80009	670-5551-03
A44	670-5551-04	B041845	B042699	CKT BOARD ASSY:1ST L.O.DRIVER	80009	670-5551-04
A44	670-5551-05	B042700		CKT BOARD ASSY:1ST L.O. DRIVER	80009	670-5551-05
A46	670-5547-01	B030000	B042479	CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-01
A46	670-5547-02	B042480	B042679	CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-02
A46	670-5547-03	B042680		CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-03
A46A1	670-7939-00	B042480	B042539	CKT BOARD ASSY:INTERFACE	80009	670-7939-00
A46A1	670-7939-01	B042540		CKT BOARD ASSY:INTERFACE	80009	670-7939-01
A46A3	670-7939-00	B042480	B042539	CKT BOARD ASSY:INTERFACE	80009	670-7939-00
A46A3	670-7939-01	B042540		CKT BOARD ASSY:INTERFACE	80009	670-7939-01
A48	670-5550-01			CKT BOARD ASSY:SPAN ATTENUATOR	80009	670-5550-01

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A50	119-1069-00	B030000	B031129	PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-00
A50	-----					
A50	119-1069-01	B031330	B031279	PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-01
A50	-----					
A50	119-1069-02	B031280		PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-02
A50	-----					
A50	119-1069-00	B030000	B031460	PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-00
A50	-----					
A50	119-1069-01	B031461	B041659	PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-01
A50	-----					
A50	119-1069-02	B041660		PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-02
A50	-----					
A50A1	670-5519-00			CKT BOARD ASSY:SYNTHESIZER (OPTION 03 ONLY)	80009	670-5519-00
A50A1	-----					
A50A2	670-5520-01	B030000	B031129	CKT BOARD ASSY:STROBE DRIVER (OPTION 03 ONLY)	80009	670-5520-01
A50A2	-----					
A50A2	670-5520-02	B031130		CKT BOARD ASSY:STROBE DRIVER (OPTION 03 ONLY)	80009	670-5520-02
A50A2	-----					
A50A3	670-5522-01			CKT BOARD ASSY:OFFSET MIXER (OPTION 03 ONLY)	80009	670-5522-01
A50A3	-----					
A50A4	670-5521-03	B030000	B031129	CKT BOARD ASSY:ERROR AMPLIFIER (492 OPTION 03 ONLY)	80009	670-5521-03
A50A4	-----					
A50A4	670-5521-05	B031130		CKT BOARD ASSY:ERROR AMPLIFIER (492 OPTION 03 ONLY)	80009	670-5521-05
A50A4	-----					
A50A4	670-5521-03	B030000	B031460	CKT BOARD ASSY:ERROR AMPLIFIER (492P OPTION 03 ONLY)	80009	670-5521-03
A50A4	-----					
A50A4	670-5521-05	B031461		CKT BOARD ASSY:ERROR AMPLIFIER (492P OPTION 03 ONLY)	80009	670-5521-05
A50A4	-----					
A50A5	670-5524-00	B030000	B031279	CKT BOARD ASSY:CONTROLLED OSC (492 OPTION 03 ONLY)	80009	670-5524-00
A50A5	-----					
A50A5	670-5524-01	B031280		CKT BOARD ASSY:CONTROLLED OSC (492 OPION 03 ONLY)	80009	670-5524-01
A50A5	-----					
A50A5	670-5524-00	B030000	0 B04165	CKT BOARD ASSY:CONTROLLED OSC (492P OPION 03 ONLY)	80009	670-5524-00
A50A5	-----					
A50A5	670-5524-01	B041660		CKT BOARD ASSY:CONTROLLED OSC (492P OPTION 03 ONLY)	80009	670-5524-01
A50A5	-----					
A51	670-5523-00	B030000	B031129	CKT BOARD ASSY:PHASE LOCK CONTROL (492 OPTION 03 ONLY)	80009	670-5523-00
A51	-----					
A51	670-5523-01	B031130		CKT BOARD ASSY:PHASE LOCK CONTROL (492 OPTION 03 ONLY)	80009	670-5523-01
A51	-----					
A51	670-5523-00	B030000	B031460	CKT BOARD ASSY:PHASE LOCK CONTROL (492P OPTION 03 ONLY)	80009	670-5523-00
A51	-----					
A51	670-5523-01	B031461		CKT BOARD ASSY:PHASE LOCK CONTROL (492P OPTION 03 ONLY)	80009	670-5523-01
A51	-----					
A54	670-5546-01	B030000	B042799	CKT BOARD ASSY:MEMORY	80009	670-5546-01
A54	-----					
A54	670-5546-02	B042800		CKT BOARD ASSY:MEMORY	80009	670-5546-02
A54	-----					
A54	670-6946-03	B030000	B042799	CKT BOARD ASSY:MEMORY (492P ONLY)	80009	670-6946-03
A54	-----					
A54	670-6946-04	B042800		CKT BOARD ASSY:MEMORY (492P ONLY)	80009	670-6946-04
A54	-----					
A56	670-5543-01			CKT BOARD ASSY:GPIB (492P ONLY)	80009	670-5543-01
A56	-----					
A56A1	670-7060-00			CKT BOARD ASSY:GPIB EXTENDER (492P ONLY)	80009	670-7060-00
A56A1	-----					

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A58	670-5542-00	B030000	B031419	CKT BOARD ASSY:PROCESSOR	80009	670-5542-00
A58	670-5542-01	B031420		CKT BOARD ASSY:PROCESSOR	80009	670-5542-01
A58	670-5542-00	B030000	B031659	CKT BOARD ASSY:PROCESSOR	80009	670-5542-00
A58	----	----		(492P ONLY)		
A58	670-5542-01	B031660		CKT BOARD ASSY:PROCESSOR	80009	670-5542-01
A58	----	----		(492P ONLY)		
A60	670-5555-00	B030000	B041894	CKT BOARD ASSY:DIGITAL STORAGE INTFC	80009	670-5555-00
A60	----	----		(OPTION 02 ONLY)		
A60	670-5555-01	B041895	B043114	CKT BOARD ASSY:DIGITAL STORAGE INTFC	80009	670-5555-01
A60	----	----		(OPTION 02 ONLY)		
A60	670-5555-02	B043115		CKT BOARD ASSY:DIGITAL STORAGE INTFC	80009	670-5555-02
A60	----	----		(OPTION 02 ONLY)		
A61	670-5554-00	B030000	B042219	CKT BOARD ASSY:DIGITAL STORAGE	80009	670-5554-00
A61	----	----		(OPTION 02 ONLY)		
A61	670-5554-02	B042220	B043114	CKT BOARD ASSY:DIGITAL STORAGE	80009	670-5554-01
A61	----	----		(OPTION 02 ONLY)		
A61	670-5554-03	B043115		CKT BOARD ASSY:DIGITAL STORAGE	80009	670-5554-03
A61	----	----		(OPTION 02 ONLY)		
A62	670-5548-01			CKT BOARD ASSY:LOG AMP.	80009	670-5548-01
A64	670-5553-00			CKT BOARD ASSY:DEFLECTION AMPS	80009	670-5553-00
A66	670-5544-00			CKT BOARD ASSY:CRT READOUT	80009	670-5544-00
A68	644-0141-01	B030000	B042199	VAR RESOLN MDLE:#2	80009	644-0141-01
A68	644-0141-02	B042200		VAR RESOLN KIT:#2	80009	644-0141-02
A68A1	670-5536-01	B030000	B042199	CKT BOARD ASSY:#2 V.R. MOTHER	80009	670-5536-01
A68A1	670-5536-02	B042200		CKT BOARD ASSY:#2 VR MOTHER	80009	670-5536-02
A68A2	670-5534-01	B030000	B031129	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-01
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492 ONLY)		
A68A2	670-5534-02	B031130	B042199	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-02
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492 ONLY)		
A68A2	670-5534-04	B042200	B042749	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-04
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492 ONLY)		
A68A2	670-5534-06	B042750		CKT BOARD ASSY:: 2ND FILTER SELECT	80009	670-5534-06
A68A2	----	----		492 ONLY)		
A68A2	670-5534-01	B030000	B031113	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-01
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492P ONLY)		
A68A2	670-5534-02	B031114	B042199	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-02
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492P ONLY)		
A68A2	670-5534-04	B042200	B042749	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-04
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492P ONLY)		
A68A2	670-5534-06	B042750		CKT BOARD ASSY:: 2ND FILTER SELECT	80009	670-5534-06
A68A2	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A68A2	----	----		492P ONLY)		
A68A3	670-5533-02			CKT BOARD ASSY:BAND LEVELING	80009	670-5533-02
A68A4	670-5535-01			CKT BOARD ASSY:POST V.R. AMPLIFIER	80009	670-5535-01
A69	644-0140-01	B030000	B042199	VAR RESOLN MDLE:#1	80009	644-0140-01
A69	644-0140-02	B042200		VAR RESOLN KIT:	80009	644-0140-02
A69A1	670-5528-01	B030000	B042199	CKT BOARD ASSY:#1 V.R. MOTHER	80009	670-5528-01
A69A1	670-5528-02	B042200		CKT BOARD ASSY:#1 VR MOTHER	80009	670-5528-02
A69A2	670-5529-01			CKT BOARD ASSY:V.R. INPUT	80009	670-5529-01
A69A3	670-5530-01	B030000	B031129	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-01
A69A3	----	----		(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	----	----		492 ONLY)		

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A3	670-5530-02	B031130	B042199	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-02
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492 ONLY)		
A69A3	670-5530-03	B042200	B042329	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-03
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492 ONLY)		
A69A3	670-5530-04	B042330		CKT BOARD ASSY:: 1ST FILTER SELECT	80009	670-5534-04
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492 ONLY)		
A69A3	670-5530-01	B030000	B031113	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-01
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492P ONLY)		
A69A3	670-5530-02	B031114	B042199	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-02
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492P ONLY)		
A69A3	670-5530-03	B042200	B042329	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-03
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492P ONLY)		
A69A3	670-5530-04	B042330		CKT BOARD ASSY:: 1ST FILTER SELECT	80009	670-5534-04
A69A3	-----			(XTALS NOT INCLUDED WITH THIS CKT BD		
A69A3	-----			492P ONLY)		
AA69A4	670-5531-02	B030000	B042199	CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-02
A69A4	670-5531-03	B042200	B042329	CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-03
A69A4	670-5531-04	B042330		CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-04
A69A5	670-5532-02	B030000	B042199	CKT BOARD ASSY:20DB GAIN STEPS	80009	670-5532-02
A69A5	670-5532-03	B042200		CKT BOARD ASSY:20DB GAIN STEPS	80009	670-5532-03
A70	670-5557-01	B030000	B041949	CKT BOARD ASSY:Z AXIS	80009	670-5557-01
A70	670-5557-02	B041950		CKT BOARD ASSY:Z AXIS	80009	670-5557-02
A72	670-5549-01	B030000	B042579	CKT BOARD ASSY:SWEEP	80009	670-5549-01
A72	670-5549-02	B042580		CKT BOARD ASSY:: SWEEP	80009	670-5549-02
A74	670-5559-00	B030000	B040219	CKT BOARD ASSY:HIG HIGH VOLTAGE	80009	670-5559-00
A74	670-5559-01	B040220	B042289	CKT BOARD ASSY:HIG HIGH VOLTAGE	80009	670-5559-01
A74	670-5559-03	B042290		CKT BOARD ASSY:HIG HIGH VOLTAGE	80009	670-5559-03
A74A1	119-1159-01			CKT BOARD ASSY:HIG HIGH VOLTAGE	80009	119-1159-01
A77	670-5746-00	B030000	B042069	CKT BOARD ASSY:CRT GRATICULE LIGHT	80009	670-5746-00
A77	670-5746-01	B042070		CKT BOARD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
A16	119-0752-01			OSCILLATOR:2.0 TO 6.1 GHZ,W/CAN & CKT	80009	119-0752-01
A16C1013	290-0778-00	B010485		CAP.,FXD,ELCTLT:1UF,+50-10%,50V	54473	ECE-A50N1
A16A1	670-5540-00			CKT BOARD ASSY:1ST L.O. INTERFACE	80009	670-5540-00
A16A1C1012	290-0326-02			CAP.,FXD,ELCTLT:820UF,10%,6V	56289	109D827X9006F2
A16A1C1014	290-0326-02			CAP.,FXD,ELCTLT:820UF,10%,6V	56289	109D827X9006F2
A16A1C1016	290-0529-00			CAP.,FXD,ELCTLT:47UF,20%,20V	05397	T362C476M020AS
A16A1K1015	148-0076-00			RELAY,REED:1 FORM A,5V,0.25A,100V	95348	F81-1447
A16A1L1011	108-0205-00	B041489		COIL,RF:1MH	76493	8209
A16A1R1011	315-0100-00	B030000	B041488	RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A16A1VR1010	152-0590-00			SEMICONV DEVICE:ZENER,18V,5% AT 7MA	04713	SZG35014K2
A16A1VR1018	152-0304-00			SEMICONV DEVICE:ZENER,0.4W,20V,5%	15238	Z5411
A16A1VR1019	152-0304-00			SEMICONV DEVICE:ZENER,0.4W,20V,5%	15238	Z5411

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A18	119-1096-00	B030000	B041299	SEC CONV ASSY:2072MHZ	80009	119-1096-00
A18	119-1096-01	B041300		SEC CONV ASSY:2072MHZ	80009	119-1096-01
A18W140	175-2199-00			CABLE ASSY,RF:50 OHM COAX,13.04 INCH LONG	80009	175-2199-00
A18A1	-----			(NONREPLACEABLE SUBPART OF A18)		
A20	119-1022-02	B030000	B039999	OSCILLATOR:2182.5MHZ	80009	119-1022-02
A21	670-5512-02	B030000	B039999	CKT BOARD ASSY:SHAPER/BIAS (492 ONLY)	80009	670-5512-02
A21	670-5512-04	B031032	B039999	CKT BOARD ASSY:SHAPER/BIAS (492 ONLY)	80009	670-5512-04
A21	670-5512-02	B030000	B031536	CKT BOARD ASSY:SHAPER/BIAS (492P ONLY)	80009	670-5512-02
A21	670-5512-04	B031537	B039999	CKT BOARD ASSY:SHAPER/BIAS (492P ONLY)	80009	670-5512-04
A21C1015	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C1016	283-0000-00	B030000	B039999	CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A21C1017	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C1028	283-0000-00	B030000	B039999	CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A21C1071	283-0271-00	B030000	B039999	CAP.,FXD,CER DI:0.001UF,20%,4000V	59660	0828552Y5SO102M
A21C1083	281-0700-00	B030000	B039999	CAP.,FXD,CER DI:3.3PF,10%,200V	59660	370018S3B0339K
A21C1085	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C2015	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C2044	283-0339-00	B030000	B039999	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A21C2055	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C2067	290-0305-01	B030000	B039999	CAP.,FXD,ELCTLT:3UF,10%,150V	56289	109D305X9150C2
A21C2077	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C2089	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C3012	283-0360-00	B030000	B039999	CAP.,FXD,CER DI:3300PF,10%,200V	72982	8141M200A332K
A21C3014	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3016	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3021	283-0087-00	B030000	B039999	CAP.,FXD,CER DI:300PF,10%,1000V	59660	0838020X5F00301K
A21C3022	290-0536-00	B031032	B039999	CAP.,FXD,ELCTLT:10UF,20%,25V (492 ONLY)	90201	TDC106M025FL
A21C3022	290-0536-00	B031539	B039999	CAP.,FXD,ELCTLT:10UF,20%,25V (492P ONLY)	90201	TDC106M025FL
A21C3031	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3037	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3039	283-0339-00	B030000	B039999	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A21C3043	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C3045	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C3047	283-0087-00	B030000	B039999	CAP.,FXD,CER DI:300PF,10%,1000V	59660	0838020X5F00301K
A21C3063	283-0087-00	B030000	B039999	CAP.,FXD,CER DI:300PF,10%,1000V	59660	0838020X5F00301K
A21C3067	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3069	283-0268-00	B030000	B039999	CAP.,FXD,CER DI:0.015UF,10%,50V	56289	1C20X7R153K050B
A21C3071	290-0574-00	B030000	B039999	CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A21C3081	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C3083	283-0111-00	B030000	B039999	CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A21C3085	283-0111-00	B030000	B039999	CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A21C3087	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C4027	290-0574-00	B030000	B039999	CAP.,FXD,ELCTL:47UF,10%,20V	90201	TDC476K020CL
A21C4031	290-0574-00	B030000	B039999	CAP.,FXD,ELCTL:47UF,10%,20V	90201	TDC476K020CL
A21C4033	290-0574-00	B030000	B039999	CAP.,FXD,ELCTL:47UF,10%,20V	90201	TDC476K020CL
A21C4045	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C4051	283-0212-00	B030000	B039999	CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A21C4061	283-0268-00	B030000	B039999	CAP.,FXD,CER DI:0.015UF,10%,50V	56289	1C20X7R153K050B
A21C4081	283-0087-00	B030000	B039999	CAP.,FXD,CER DI:300PF,10%,1000V	59660	0838020X5F00301K
A21CR1025	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR1073	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR3033	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR3047	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR3061	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR4013	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR4015	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21CR4021	152-0141-02	B030000	B039999	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A21Q1030	151-0150-00	B030000	B039999	TRANSISTOR:SILICON,NPN	80009	151-0150-00
A21Q1076	151-0150-00	B030000	B039999	TRANSISTOR:SILICON,NPN	80009	151-0150-00
A21Q2024	151-0150-00	B030000	B039999	TRANSISTOR:SILICON,NPN	80009	151-0150-00
A21Q2065	151-0302-00	B030000	B039999	TRANSISTOR:SILICON,NPN	07263	S038487
A21Q3035	151-0302-00	B030000	B039999	TRANSISTOR:SILICON,NPN	07263	S038487
A21Q4024	151-0301-00	B030000	B039999	TRANSISTOR:SILICON,PNP	27014	2N2907A
A21Q4026	151-0302-00	B030000	B039999	TRANSISTOR:SILICON,NPN	07263	S038487
A21Q4047	151-0301-00	B030000	B039999	TRANSISTOR:SILICON,PNP	27014	2N2907A
A21R1014	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R1017	315-0222-00	B030000	B039999	RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A21R1022	321-0001-00	B030000	B039999	RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A21R1026	321-0366-00	B030000	B039999	RES.,FXD,FILM:63.4K OHM,1%,0.125W	91637	MFF1816G63401F
A21R1028	321-0253-00	B030000	B039999	RES.,FXD,FILM:4.22K OHM,1%,0.125W	91637	MFF1816G42200F
A21R1029	315-0122-00	B030000	B039999	RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A21R1036	315-0102-00	B030000	B039999	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A21R1044	321-0289-00	B030000	B039999	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A21R1046	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R1050	321-0327-00	B030000	B039999	RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F
A21R1051	321-0323-00	B030000	B039999	RES.,FXD,FILM:22.6K OHM,1%,0.125W	91637	MFF1816G22601F
A21R1052	321-0297-00	B030000	B039999	RES.,FXD,FILM:12.1K OHM,1%,0.125W	91637	MFF1816G12101F
A21R1053	321-0300-00	B030000	B039999	RES.,FXD,FILM:13K OHM,1%,0.125W	91637	MFF1816G13001F
A21R1056	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R1057	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R1058	321-0335-00	B030000	B039999	RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A21R1059	321-0331-00	B030000	B039999	RES.,FXD,FILM:27.4K OHM,1%,0.125W	91637	MFF1816G27401F
A21R1060	321-0286-00	B030000	B039999	RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F
A21R1062	321-0275-00	B030000	B039999	RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A21R1064	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R1066	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R1067	321-0270-00	B030000	B039999	RES.,FXD,FILM:6.34K OHM,1%,0.125W	91637	MFF1816G63400F
A21R1068	321-0279-00	B030000	B039999	RES.,FXD,FILM:7.87K OHM,1%,0.125W	91637	MFF1816G78700F
A21R1086	321-0346-00	B030000	B039999	RES.,FXD,FILM:39.2K OHM,1%,0.125W	91637	MFF1816G39201F
A21R2010	321-0314-00	B030000	B039999	RES.,FXD,FILM:18.2K OHM,1%,0.125W	91637	MFF1816G18201F
A21R2012	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R2014	321-0245-00	B030000	B039999	RES.,FXD,FILM:3.48K OHM,1%,0.125W	91637	MFF1816G34800F
A21R2016	315-0103-00	B030000	B039999	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A21R2018	321-0345-00	B030000	B039999	RES.,FXD,FILM:38.3K OHM,1%,0.125W	91637	MFF1816G38301F
A21R2026	315-0103-00	B030000	B039999	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix	Serial/Model No.		Name & Description	Mfr	Mfr Part Number
	Part No.	Eff	Dscont		Code	
A21R2030	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R2032	321-0351-00	B030000	B039999	RES.,FXD,FILM:44.2K OHM,1%,0.125W	91637	MFF1816G44201F
A21R2034	315-0223-00	B030000	B039999	RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A21R2036	321-0310-00	B030000	B039999	RES.,FXD,FILM:16.5K OHM,1%,0.125W	91637	MFF1816G16501F
A21R2038	321-0193-00	B030000	B039999	RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A21R2039	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R2040	321-0269-00	B030000	B039999	RES.,FXD,FILM:6.19K OHM,1%,0.125W	91637	MFF1816G61900F
A21R2042	321-0314-00	B030000	B039999	RES.,FXD,FILM:18.2K OHM,1%,0.125W	91637	MFF1816G18201F
A21R2044	321-0264-00	B030000	B039999	RES.,FXD,FILM:5.49K OHM,1%,0.125W	91637	MFF1816G54900F
A21R2044	----	----	----	(492 ONLY)		
A21R2044	321-0274-00	B030000	B031239	RES.,FXD,FILM:6.98K OHM,1%,0.125W	91637	MFF1816G69800F
A21R2044	----	----	----	(492P ONLY)		
A21R2044	321-0264-00	B031240	B039999	RES.,FXD,FILM:5.49K OHM,1%,0.125W	91637	MFF1816G54900F
A21R2044	----	----	----	(492P ONLY)		
A21R2046	321-0260-00	B030000	B039999	RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A21R2047	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R2048	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R2050	321-0290-00	B030000	B039999	RES.,FXD,FILM:10.2K OHM,1%,0.125W	91637	MFF1816G10201F
A21R2052	321-0307-00	B030000	B039999	RES.,FXD,FILM:15.4K OHM,1%,0.125W	91637	MFF1816G15401F
A21R2054	315-0152-00	B030000	B039999	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A21R2056	315-0152-00	B030000	B039999	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A21R2057	321-0329-00	B030000	B039999	RES.,FXD,FILM:26.1K OHM,1%,0.125W	91637	MFF1816G26101F
A21R2058	315-0392-00	B030000	B031031	RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A21R2058	----	----	----	(492 ONLY)		
A21R2058	321-0199-00	B031032	B039999	RES.,FXD,FILM:1.15K OHM,1%,0.125W	91637	MFF1816G11500F
A21R2058	----	----	----	(492 ONLY)		
A21R2058	315-0392-00	B030000	B031536	RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A21R2058	----	----	----	(492P ONLY)		
A21R2058	321-0199-00	B031537	B039999	RES.,FXD,FILM:1.15K OHM,1%,0.125W	91637	MFF1816G11500F
A21R2058	----	----	----	(492P ONLY)		
A21R2059	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R2062	321-0341-00	B030000	B039999	RES.,FXD,FILM:34.8K OHM,1%,0.125W	91637	MFF1816G34801F
A21R2064	321-0283-00	B030000	B039999	RES.,FXD,FILM:8.66K OHM,1%,0.125W	91637	MFF1816G86600F
A21R2066	321-0293-00	B030000	B039999	RES.,FXD,FILM:11K OHM,1%,0.125W	91637	MFF1816G11001F
A21R2070	321-0285-00	B030000	B039999	RES.,FXD,FILM:9.09K OHM,1%,0.125W	91637	MFF1816G90900F
A21R2072	315-0102-00	B030000	B039999	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A21R2074	321-0247-00	B030000	B039999	RES.,FXD,FILM:3.65K OHM,1%,0.125W	91637	MFF1816G36500F
A21R2076	315-0512-00	B030000	B039999	RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A21R2078	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R2084	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R2086	315-0512-00	B030000	B039999	RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A21R2087	321-0246-00	B030000	B039999	RES.,FXD,FILM:3.57K OHM,1%,0.125W	91637	MFF1816G35700F
A21R2087	----	----	----	(492 ONLY)		
A21R2087	321-0251-00	B030000	B031239	RES.,FXD,FILM:4.02K OHM,1%,0.125W	91637	MFF1816G40200F
A21R2087	----	----	----	(492P ONLY)		
A21R2087	321-0246-00	B031240	B039999	RES.,FXD,FILM:3.57K OHM,1%,0.125W	91637	MFF1816G35700F
A21R2087	----	----	----	(492P ONLY)		
A21R2088	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R3020	315-0103-00	B030000	B039999	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A21R3032	321-0226-00	B030000	B039999	RES.,FXD,FILM:2.21K OHM,1%,0.125W	91637	MFF1816G22100F
A21R3036	321-0204-00	B030000	B039999	RES.,FXD,FILM:1.3K OHM,1%,0.125W	91637	MFF1816G13000F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A21R3037	321-0260-00	B030000	B039999	RES.,FXD,FILM:4.99K OHM,1%,0.125W (492 ONLY)	91637	MFF1816G49900F
A21R3037	-----					
A21R3037	321-0266-00	B030000	B031239	RES.,FXD,FILM:5.76K OHM,1%,0.125W (492P ONLY)	91637	MFF1816G57600F
A21R3037	-----					
A21R3037	321-0260-00	B031240	B039999	RES.,FXD,FILM:4.99K OHM,1%,0.125W (492P ONLY)	91637	MFF1816G49900F
A21R3037	-----					
A21R3038	321-0297-00	B030000	B039999	RES.,FXD,FILM:12.1K OHM,1%,0.125W	91637	MFF1816G12101F
A21R3042	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R3048	315-0272-00	B030000	B039999	RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A21R3054	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R3056	315-0270-00	B030000	B039999	RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A21R3064	315-0272-00	B030000	B039999	RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A21R3066	315-0272-00	B030000	B039999	RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A21R3070	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R3072	321-0280-00	B030000	B039999	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A21R3074	321-0280-00	B030000	B039999	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A21R3075	321-0289-00	B030000	B039999	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A21R3076	321-0280-00	B030000	B039999	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A21R3077	321-0280-00	B030000	B039999	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A21R3078	321-0289-00	B030000	B039999	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A21R4012	321-0234-00	B030000	B039999	RES.,FXD,FILM:2.67K OHM,1%,0.125W	91637	MFF1816G26700F
A21R4016	321-0189-00	B030000	B039999	RES.,FXD,FILM:909 OHM,1%,0.125W	91637	MFF1816G909R0F
A21R4018	315-0680-00	B030000	B039999	RES.,FXD,CMPSN:68 OHM,5%,0.25W	01121	CB6805
A21R4019	315-0102-00	B030000	B039999	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A21R4020	315-0102-00	B030000	B039999	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A21R4036	315-0432-00	B030000	B039999	RES.,FXD,CMPSN:4.3K OHM,5%,0.25W	01121	CB4325
A21R4038	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R4042	315-0101-00	B030000	B039999	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A21R4044	315-0272-00	B030000	B039999	RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A21R4046	315-0270-00	B030000	B039999	RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A21R4072	321-0299-00	B030000	B039999	RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A21R4074	321-0299-00	B030000	B039999	RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A21R4076	321-0299-00	B030000	B039999	RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A21R4078	321-0299-00	B030000	B039999	RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A21U1010	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21U1037	156-0106-00	B030000	B039999	MICROCIRCUIT,LI:MONOLITHIC,6-DIODE ARRAY	02735	CA3039
A21U1087	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21U2037	156-0106-00	B030000	B039999	MICROCIRCUIT,LI:MONOLITHIC,6-DIODE ARRAY	02735	CA3039
A21U2047	156-0783-00	B030000	B031239	MICROCIRCUIT,LI:PRECISION VOLTAGE REFR (492 ONLY)	27014	LM399
A21U2047	-----					
A21U2047	156-0783-00	B030000	B039999	MICROCIRCUIT,LI:PRECISION VOLTAGE REFR (492P ONLY)	27014	LM399
A21U2047	-----					
A21U3025	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21U3051	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21U3089	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21U4037	156-0512-03	B030000	B039999	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A21VR1075	152-0580-00	B030000	B039999	SEMICONV DEVICE:ZENER,0.4W,75V,2%	80009	152-0580-00
A21VR2047	152-0727-00	B030000	B039999	SEMICONV DEVICE:ZENER,0.4W,6.3V,2%	80009	152-0727-00
A21VR2047	-----			(492 ONLY)		
A21VR2047	152-0727-00	B031240	B039999	SEMICONV DEVICE:ZENER,0.4W,6.3V,2% (492P ONLY)	80009	152-0727-00
A21VR2047	-----					

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A22	650-0296-00	B040000	B041999 2ND LO ASSY:PHASE LOCK	80009	650-0296-00
A22	650-0296-01	B042000	2ND LO ASSY:PHASE LOCK	80009	650-0296-01
A22C220	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C221	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C222	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C223	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C224	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C225	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C226	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22C227	281-0720-00	B040000	CAP.,FXD,CER DI:1750PF,+80-20%,250V	72982	1214-001
A22R224	321-0189-00	B040000	RES.,FXD,FILM:909 OHM,1%,0.125W	91637	MFF1816G909R0F
A22A1	670-7078-00	B040000	B042184 CKT BOARD ASSY:14-22MHZ PHASE LOCK	80009	670-7078-00
A22A1	670-7078-01	B042185	CKT BOARD ASSY:14-22MHZ PHASE LOCK	80009	670-7078-01
A22A1C1011	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C1016	283-0201-00	B040000	CAP.,FXD,CER DI:27PF,10%,200V	51642	W150-200 X7R270K
A22A1C1017	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C1023	283-0051-00	B040000	CAP.,FXD,CER DI:0.0033UF,5%,100V	56289	1C20C0G332J100B
A22A1C1024	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C1025	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A1C1026	283-0051-00	B040000	CAP.,FXD,CER DI:0.0033UF,5%,100V	56289	1C20C0G332J100B
A22A1C1028	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A1C1029	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C1031	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C1034	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C1039	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C1040	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A1C1041	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C1063	290-0536-00	B040000	CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A22A1C1065	290-0536-00	B040000	CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A22A1C1070	290-0719-00	B040000	CAP.,FXD,ELCTLT:47UF,20%,25V	56289	196D476X0025TE3
A22A1C1073	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C1074	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2011	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C2012	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2014	290-0512-00	B040000	CAP.,FXD,ELCTLT:22UF,20%,15V	56289	196D226X0015KA1
A22A1C2016	283-0326-00	B040000	CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A22A1C2017	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A1C2026	283-0339-00	B040000	B042184 CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2026	283-0239-00	B042185	CAP.,FXD,CER DI:0.022UF,10%,50V	72982	8121N083X7R0223K
A22A1C2028	283-0204-00	B040000	CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A22A1C2035	283-0330-00	B040000	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A22A1C2036	283-0339-00	B040000	B042184 CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2036	283-0239-00	B042185	CAP.,FXD,CER DI:0.022UF,10%,50V	72982	8121N083X7R0223K
A22A1C2037	283-0330-00	B040000	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A22A1C2040	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2062	290-0536-00	B040000	CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A22A1C2065	290-0536-00	B040000	CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A22A1C2067	283-0154-00	B040000	CAP.,FXD,CER DI:22PF,5%,50V	72982	8111B061C0G220J
A22A1C2070	283-0107-00	B040000	CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A22A1C2072	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A22A1C2075	283-0339-00	B040000	CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A22A1C2076	283-0175-00	B040000		CAP.,FXD,CER DI:10PF,5%,200V	96733	TDR43BY100DP
A22A1C2077	283-0197-00	B040000		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075COG0471J
A22A1CR1018	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR1070	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR1075	152-0578-00	B040000		SEMICONV DEVICE:VARACTOR,200PF	50101	V34-4202
A22A1CR2012	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR2014	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR2015	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR2018	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1CR2055	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A1L1013	120-0407-00	B040000		XFMR,TOROID:5 TURNS SINGLE	80009	120-0407-00
A22A1L1078	108-0440-00	B040000		COIL,RF:8UH,TOROIDAL INDUCTOR	80009	108-0440-00
A22A1L2011	108-0440-00	B040000		COIL,RF:8UH,TOROIDAL INDUCTOR	80009	108-0440-00
A22A1L2027	108-0440-00	B040000	B042184	COIL,RF:8UH,TOROIDAL INDUCTOR	80009	108-0440-00
A22A1L2027	120-0407-00	B042185		XFMR,TOROID:5 TURNS SINGLE	80009	120-0407-00
A22A1L2035	108-0440-00	B040000	B042184	COIL,RF:8UH,TOROIDAL INDUCTOR	80009	108-0440-00
A22A1L2035	120-0407-00	B042185		XFMR,TOROID:5 TURNS SINGLE	80009	120-0407-00
A22A1Q1012	151-0103-00	B040000		TRANSISTOR:SILICON,NPN	80009	151-0103-00
A22A1Q1022	151-0103-00	B040000		TRANSISTOR:SILICON,NPN	80009	151-0103-00
A22A1Q1036	151-0441-00	B040000		TRANSISTOR:SILICON,NPN	04713	SRF501
A22A1Q1037	151-0441-00	B040000		TRANSISTOR:SILICON,NPN	04713	SRF501
A22A1Q1038	151-0441-00	B040000		TRANSISTOR:SILICON,NPN	04713	SRF501
A22A1Q2021	151-0301-00	B040000		TRANSISTOR:SILICON,PNP	27014	2N2907A
A22A1Q2073	151-0441-00	B040000		TRANSISTOR:SILICON,NPN	04713	SRF501
A22A1Q2078	151-0441-00	B040000		TRANSISTOR:SILICON,NPN	04713	SRF501
A22A1R1010	317-0750-00	B040000	B042184	RES.,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A22A1R1010	315-0750-00	B042185		RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A22A1R1011	315-0471-00	B040000		RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A22A1R1012	315-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R1013	315-0100-00	B040000		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A22A1R1014	321-0297-00	B040000		RES.,FXD,FILM:12.1K OHM,1%,0.125W	91637	MFF1816G12101F
A22A1R1015	321-0262-00	B040000		RES.,FXD,FILM:5.23K OHM,1%,0.125W	91637	MFF1816G52300F
A22A1R1016	315-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R1017	315-0470-00	B040000		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A1R1021	315-0390-00	B040000		RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A22A1R1022	315-0200-00	B040000		RES.,FXD,CMPSN:20 OHM,5%,0.25W	01121	CB2005
A22A1R1023	315-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R1024	315-0302-00	B040000		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A22A1R1025	315-0302-00	B040000		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A22A1R1026	315-0102-00	B040000		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R1027	315-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R1028	315-0102-00	B040000		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R1030	321-0821-00	B040000		RES.,FXD,FILM:2.12K OHM,1%,0.125W	91637	MFF1816G21200F
A22A1R1031	321-0217-00	B040000		RES.,FXD,FILM:1.78K OHM,1%,0.125W	91637	MFF1816G17800F
A22A1R1032	315-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R1034	317-0200-00	B040000		RES.,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A22A1R1035	317-0161-00	B040000		RES.,FXD,CMPSN:160 OHM,5%,0.125W	01121	BB1615
A22A1R1036	317-0161-00	B040000		RES.,FXD,CMPSN:160 OHM,5%,0.125W	01121	BB1615
A22A1R1037	317-0511-00	B040000		RES.,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A22A1R1038	317-0391-00	B040000		RES.,FXD,CMPSN:390 OHM,5%,0.125W	01121	BB3915
A22A1R1039	317-0111-00	B040000		RES.,FXD,CMPSN:110 OHM,5%,0.125W	01121	BB1115
A22A1R1040	317-0820-00	B040000		RES.,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A22A1R1041	317-0680-00	B040000		RES.,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A22A1R1042	321-0286-00	B040000		RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A22A1R1043	321-0295-00	B040000	RES.,FXD,FILM:11.5K OHM,1%,0.125W	91637	MFF1816G11501F
A22A1R1044	321-0307-00	B040000	RES.,FXD,FILM:15.4K OHM,1%,0.125W	91637	MFF1816G15401F
A22A1R1045	321-0320-00	B040000	RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A22A1R1046	321-0337-00	B040000	RES.,FXD,FILM:31.6K OHM,1%,0.125W	91637	MFF1816G31601F
A22A1R1047	321-0364-00	B040000	RES.,FXD,FILM:60.4K OHM,1%,0.125W	91637	MFF1816G60401F
A22A1R1048	321-0420-00	B040000	RES.,FXD,FILM:232K OHM,1%,0.125W	91637	MFF1816G23202F
A22A1R1050	321-0299-00	B040000	RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A22A1R1051	321-0289-00	B040000	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A22A1R1052	321-0280-00	B040000	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A22A1R1053	321-0275-00	B040000	RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A22A1R1054	321-0271-00	B040000	RES.,FXD,FILM:6.49K OHM,1%,0.125W	91637	MFF1816G64900F
A22A1R1055	321-0268-00	B040000	RES.,FXD,FILM:6.04K OHM,1%,0.125W	91637	MFF1816G60400F
A22A1R1060	315-0470-00	B040000	RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A1R1061	321-0193-00	B040000	RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A22A1R1063	321-0289-00	B040000	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A22A1R1064	315-0470-00	B040000	RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A1R1065	321-0193-00	B040000	RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A22A1R1066	321-0248-00	B040000	RES.,FXD,FILM:3.74K OHM,1%,0.125W	91637	MFF1816G37400F
A22A1R1067	321-0248-00	B040000	RES.,FXD,FILM:3.74K OHM,1%,0.125W	91637	MFF1816G37400F
A22A1R1068	---	---	TEST SELECTABLE		
A22A1R1070	---	---	TEST SELECTABLE		
A22A1R1071	321-0245-00	B040000	RES.,FXD,FILM:3.48K OHM,1%,0.125W	91637	MFF1816G34800F
A22A1R1072	315-0470-00	B040000	RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A1R1078	315-0390-00	B040000	RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A22A1R2010	321-1296-07	B040000	RES.,FXD,FILM:12K OHM,0.1%,0.125W	91637	MFF1816C12001B
A22A1R2011	321-1296-07	B040000	RES.,FXD,FILM:12K OHM,0.1%,0.125W	91637	MFF1816C12001B
A22A1R2012	315-0470-00	B040000	RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A1R2013	315-0103-00	B040000	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A22A1R2014	315-0332-00	B040000	RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A22A1R2015	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2016	321-0264-07	B040000	RES.,FXD,FILM:5.49K OHM,0.1%,0.125W	91637	MFF1816C54900B
A22A1R2017	321-1617-06	B040000	RES.,FXD,FILM:5.85K OHM,0.25%,0.125W	91637	MFF1816C58500C
A22A1R2018	315-0302-00	B040000	RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A22A1R2019	315-0751-00	B040000	RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A22A1R2020	315-0152-00	B040000	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A22A1R2021	315-0240-00	B040000	RES.,FXD,CMPSN:24 OHM,5%,0.25W	01121	CB2405
A22A1R2022	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2023	315-0152-00	B040000	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A22A1R2024	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2025	315-0270-00	B042185	RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A22A1R2026	315-0152-00	B040000	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A22A1R2027	315-0131-00	B040000	RES.,FXD,CMPSN:130 OHM,5%,0.25W	01121	CB1315
A22A1R2028	315-0911-00	B040000	RES.,FXD,CMPSN:910 OHM,5%,0.25W	01121	CB9115
A22A1R2029	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2030	315-0152-00	B040000	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A22A1R2033	315-0152-00	B040000	RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A22A1R2035	315-0161-00	B040000	RES.,FXD,CMPSN:160 OHM,5%,0.25W	01121	CB1615
A22A1R2036	315-0391-00	B040000	RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A22A1R2037	315-0161-00	B040000	RES.,FXD,CMPSN:160 OHM,5%,0.25W	01121	CB1615
A22A1R2038	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2039	315-0270-00	B042185	RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A22A1R2042	321-0280-00	B040000	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A22A1R2043	321-0279-00	B040000	RES.,FXD,FILM:7.87K OHM,1%,0.125W	91637	MFF1816G78700F
A22A1R2044	321-0280-00	B040000	RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A22A1R2045	321-0281-00	B040000	RES.,FXD,FILM:8.25K OHM,1%,0.125W	91637	MFF1816G82500F
A22A1R2046	321-0283-00	B040000	RES.,FXD,FILM:8.66K OHM,1%,0.125W	91637	MFF1816G86600F
A22A1R2047	321-0286-00	B040000	RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F
A22A1R2048	321-0294-00	B040000	RES.,FXD,FILM:11.3K OHM,1%,0.125W	91637	MFF1816G11301F
A22A1R2050	321-0361-00	B040000	RES.,FXD,FILM:56.2K OHM,1%,0.125W	91637	MFF1816G56201F
A22A1R2051	321-0334-00	B040000	RES.,FXD,FILM:29.4K OHM,1%,0.125W	91637	MFF1816G29401F
A22A1R2052	321-0314-00	B040000	RES.,FXD,FILM:18.2K OHM,1%,0.125W	91637	MFF1816G18201F
A22A1R2053	321-0300-00	B040000	RES.,FXD,FILM:13K OHM,1%,0.125W	91637	MFF1816G13001F
A22A1R2054	321-0289-00	B040000	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A22A1R2055	321-0279-00	B040000	RES.,FXD,FILM:7.87K OHM,1%,0.125W	91637	MFF1816G78700F
A22A1R2056	321-0651-00	B040000	RES.,FXD,FILM:15.8K OHM,0.25%,0.125W	91637	MFF1816C15801C
A22A1R2057	321-0308-00	B040000	RES.,FXD,FILM:15.8K OHM,1%,0.125W	91637	MFF1816G15801F
A22A1R2058	321-0285-09	B040000	RES.,FXD,FILM:9.09K OHM,1%,0.125W	24546	NE55E9091F
A22A1R2059	321-0289-00	B040000	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A22A1R2060	321-0289-00	B040000	RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A22A1R2061	321-0239-00	B040000	RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A22A1R2063	-----		TEST SELECTABLE		
A22A1R2064	315-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R2065	315-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R2071	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2072	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2073	315-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A22A1R2074	321-0272-00	B040000	RES.,FXD,FILM:6.65K OHM,1%,0.125W	91637	MFF1816G66500F
A22A1R2076	315-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R2078	321-0272-00	B040000	RES.,FXD,FILM:6.65K OHM,1%,0.125W	91637	MFF1816G66500F
A22A1R2079	315-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A22A1R2097	321-0047-00	B040000	RES.,FXD,FILM:30.1 OHM,1%,0.125W	91637	MFF1816G30R10F
A22A1T1075	120-1386-00	B040000	TRANSFORMER,RF:TOROID,3 WINDINGS	80009	120-1386-00
A22A1T1077	120-1427-00	B040000	XFMR,COIL:TOROID,2 LINES	80009	120-1427-00
A22A1U1015	156-0105-04	B040000	MICROCIRCUIT,LI:OPNL AMPL,SCREENED	80009	156-0105-04
A22A1U1028	156-1338-02	B040000	MICROCIRCUIT,LI:OPNL AMPL,SCREENED	80009	156-1338-02
A22A1U1051	156-1545-00	B040000	MICROCIRCUIT,LI:DIODE ARRAY,7 ISOL DIODES	07263	FS12720M
A22A1U1062	156-1272-00	B040000	MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB
A22A1U2014	156-1272-00	B040000	MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB
A22A1U2027	156-0230-02	B040000	MICROCIRCUIT,DI:DUAL D-TYPE M/S,FF,SCRN	04713	MC10131LD
A22A1U2036	156-0860-02	B040000	MICROCIRCUIT,DI:TRIPLE LINE RECEIVER,SCRN	04713	MC10116PD/LD
A22A1U2051	156-1545-00	B040000	MICROCIRCUIT,LI:DIODE ARRAY,7 ISOL DIODES	07263	FS12720M
A22A1U2063	156-1338-02	B040000	MICROCIRCUIT,LI:OPNL AMPL,SCREENED	80009	156-1338-02
A22A1VR2021	152-0486-00	B040000	SEMICONV DEVICE:ZENER,0.25W,6.2V,5%	80009	152-0486-00
A22A1W2059	131-0566-00	B040000	BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
..					
A22A2	119-1457-00	B040000	B041999 PH LOCK LO ASSY:	80009	119-1457-00
A22A2	119-1457-01	B042000	PH LOCK LO ASSY:	80009	119-1457-01
..					
A22A2C2200	281-0825-00	B040000	CAP.,FXD,CER DI:0.005UF, +100-0%,100V	33095	51-726-008
A22A2C2201	281-0825-00	B040000	CAP.,FXD,CER DI:0.005UF, +100-0%,100V	33095	51-726-008
A22A2C2202	281-0825-00	B040000	CAP.,FXD,CER DI:0.005UF, +100-0%,100V	33095	51-726-008
A22A2C2203	281-0875-00	B040000	CAP.,FXD,CER DI:100PF,20%,200V	33095	54-713-001-101M
A22A2C2204	281-0875-00	B040000	CAP.,FXD,CER DI:100PF,20%,200V	33095	54-713-001-101M

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A22A2A1	670-7395-00	B040000	B041999	CKT BOARD ASSY:2182MHZ MICROSTRIP OSC	80009	670-7395-00
A22A2A1	670-7395-01	B042000		CKT BOARD ASSY:2182MHZ MICROSTRIP OSC	80009	670-7395-01
A22A2A1C1011	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C1013	283-0220-00	B040000		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A1C1014	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C1021	283-0176-00	B042000		CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A22A2A1C1031	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C1033	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2011	283-0220-00	B040000		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A1C2012	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2013	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2014	283-0176-00	B040000	B041999	CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A22A2A1C2021	283-0220-00	B040000	B041999	CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A1C2023	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2024	290-0517-00	B040000		CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A2A1C2025	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2031	283-0181-00	B040000		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A22A2A1C2032	283-0220-00	B040000		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A1C2033	283-0220-00	B040000		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A1CR1028	152-0722-00	B040000		SEMICONV DEVICE:SILICON,1.5PF,45V	17540	DVH-6934-98
A22A2A1CR2013	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A2A1CR2021	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A2A1CR2031	152-0141-02	B040000		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A22A2A1L1011	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L1014	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2011	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2013	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2023	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2025	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2031	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2032	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1L2033	108-0682-00	B040000		COIL,RF:66NH	80009	108-0682-00
A22A2A1Q1011	151-0689-00	B040000		TRANSISTOR:SILICON,NPN	80009	151-0689-00
A22A2A1Q1021	151-0630-00	B040000		TRANSISTOR:SILICON,NPN	80009	151-0630-00
A22A2A1Q1031	151-0689-00	B040000		TRANSISTOR:SILICON,NPN	80009	151-0689-00
A22A2A1Q2021	151-0301-00	B040000		TRANSISTOR:SILICON,PNP	27014	2N2907A
A22A2A1R1011	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1012	321-0134-00	B040000		RES.,FXD,FILM:243 OHM,1%,0.125W	91637	MFF1816G243R0F
A22A2A1R1013	321-0216-00	B040000		RES.,FXD,FILM:1.74K OHM,1%,0.125W	91637	MFF1816G17400F
A22A2A1R1015	317-0104-00	B040000		RES.,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A22A2A1R1021	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1022	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1023	317-0240-00	B040000		RES.,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1026	317-0240-00	B040000		RES.,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1027	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1028	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1029	317-0240-00	B040000		RES.,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A22A2A1R1032	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R1033	317-0101-00	B040000		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2013	321-0250-00	B040000		RES.,FXD,FILM:3.92K OHM,1%,0.125W	91637	MFF1816G39200F
A22A2A1R2014	317-0243-00	B040000		RES.,FXD,CMPSN:24K OHM,5%,0.125W	01121	BB2435
A22A2A1R2015	317-0472-00	B040000		RES.,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A22A2A1R2016	317-0622-00	B040000		RES.,FXD,CMPSN:6.2K OHM,5%,0.125W	01121	BB6225

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A22A2A1R2017	317-0390-00	B040000	RES.,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2021	317-0103-00	B040000	RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A22A2A1R2022	317-0102-00	B040000	RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A22A2A1R2023	317-0390-00	B040000	RES.,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A22A2A1R2024	317-0151-00	B040000	RES.,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A22A2A1R2025	317-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2030	317-0101-00	B040000	RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A22A2A1R2031	321-0265-00	B040000	RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A22A2A1R2032	321-0932-00	B040000	RES.,FXD,FILM:2.5K OHM,1%,0.125W	24546	NA55D2501F
A22A2A1R2033	321-0149-00	B040000	RES.,FXD,FILM:348 OHM,1%,0.125W	91637	MFF1816G348R0F
..					
A22A2A2	670-7076-00	B040000	CKT BOARD ASSY:220MHZ REFERENCE	80009	670-7076-00
A22A2A2C1025	283-0157-00	B040000	CAP.,FXD,CER DI:7PF,5%,500V	59660	8111B065COHO709D
A22A2A2C1029	283-0070-00	B040000	CAP.,FXD,CER DI:30PF,10%,50V	72982	8121-060C0G0300K
A22A2A2C1036	283-0154-00	B040000	CAP.,FXD,CER DI:22PF,5%,50V	72982	8111B061C0G220J
A22A2A2C1038	283-0156-00	B040000	CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A22A2A2C2015	283-0185-00	B040000	CAP.,FXD,CER DI:2.5PF,5%,50V	72982	8101B057C0K0295B
A22A2A2C2021	283-0220-00	B040000	CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A22A2A2C2023	283-0326-00	B040000	CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A22A2A2C2026	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A2A2C3015	283-0158-00	B040000	CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A22A2A2C3024	290-0517-00	B040000	CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A22A2A2CR2014	152-0153-04	B040000	SEMICONV DEVICE:SW,S1,10V,10MAMA	01295	PG7032
A22A2A2L1025	108-0436-00	B040000	COIL,RF:FIXED,240NH	80009	108-0436-00
A22A2A2L1034	108-0733-00	B040000	COIL,RF:113NH	80009	108-0733-00
A22A2A2Q1024	151-0441-00	B040000	TRANSISTOR:SILICON,NPN	04713	SRF501
A22A2A2Q2024	151-0441-00	B040000	TRANSISTOR:SILICON,NPN	04713	SRF501
A22A2A2R2018	317-0330-00	B040000	RES.,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A22A2A2R2019	317-0431-00	B040000	RES.,FXD,CMPSN:430 OHM,5%,0.125W	01121	BB4315
A22A2A2R2021	315-0122-00	B040000	RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A22A2A2R2023	315-0821-00	B040000	RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A22A2A2R2032	315-0331-00	B040000	RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A22A2A2R2033	315-0331-00	B040000	RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A22A2A2R3014	317-0301-00	B040000	RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3015	317-0360-00	B040000	RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3016	317-0360-00	B040000	RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A22A2A2R3021	317-0301-00	B040000	RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A22A2A2R3025	315-0470-00	B040000	RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A22A2A2T2015	120-1393-00	B040000	TRANSFORMER,RF:BALUN	80009	120-1393-00
..					
A22A2A3	670-7079-00	B040000	CKT BOARD ASSY:220MHZ REFERENCE MIXER	80009	670-7079-00
A22A2A3C1013	283-0107-00	B040000	CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A22A2A3C1014	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A2A3C1015	283-0108-00	B040000	CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A22A2A3C1016	283-0139-00	B040000	CAP.,FXD,CER DI:150PF,20%,50V	51642	W100-050-X5F151M
A22A2A3CR1011	152-0322-00	B040000	SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A22A2A3CR1012	152-0322-00	B040000	SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A22A2A3L1013	108-0182-00	B040000	COIL,RF:0.3UH	80009	108-0182-00
A22A2A3L1014	108-0182-00	B040000	COIL,RF:0.3UH	80009	108-0182-00
A22A2A3L1015	108-0182-00	B040000	COIL,RF:0.3UH	80009	108-0182-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A23	119-1131-01	B030000	B041819	SEC CON ASSY:829MHZ	80009	119-1131-01
A23	119-1131-02	B041820		SEC CON ASSY:829MHZ	80009	119-1131-02
A23C230	281-0825-00			CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C231	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A23C232	281-0825-00			CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C233	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A23C234	281-0825-00			CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C235	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A23C236	281-0825-00			CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A23C237	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A23C239	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A23P231	131-1924-00			CONN,RCPT,ELEC:SMA SERIES,FEMALE	24931	OBD
A23P232	131-1170-00			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	51-045-0249
A23P233	131-1170-00			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	51-045-0249
A23P235	131-1170-00			CONN,RCPT,ELEC:SNAP-ON,MALE	98291	51-045-0249
A23P236	131-1924-00			CONN,RCPT,ELEC:SMA SERIES,FEMALE	24931	OBD
A23P237	131-1924-00			CONN,RCPT,ELEC:SMA SERIES,FEMALE	24931	OBD
A23U1013	156-0285-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM340T-12
A23U2026	156-0872-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC7912C
A23U3024	156-0277-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	07263	MICROA7805UC
A23A1	670-5936-00			CKT BOARD ASSY:719MHZ SECOND LO	80009	670-5936-00
A23A1C1011	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A1C1012	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A23A1C1013	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A1C1021	283-0159-00			CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A1C1022	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A1C1023	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A1C1024	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A23A1C1025	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A23A1C2011	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A1C2012	283-0160-00			CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A23A1C2013	283-0158-00			CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A23A1C2014	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A23A1C2015	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A23A1C2021	283-0159-00			CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A1C2022	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A1C2023	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A1C2024	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A23A1CR1011	152-0738-00			SEMICONV DEVICE:VVC,30V,1.2PF AT 4V	80009	152-0738-00
A23A1J2026	131-1003-00			CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A23A1L1011	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A1L1021	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A1L2010	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A1L2021	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A1Q1021	151-0630-00			TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A1Q2014	151-0447-00			TRANSISTOR:SILICON,NPN	04713	SRF502-1
A23A1Q2021	151-0630-00			TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A1R1011	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A1R1020	317-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.125W	01121	BB2205
A23A1R1021	317-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A1R1022	317-0330-00			RES.,FXD,CMPSN:33 OHM,5%,0.125W	01121	BB3305
A23A1R1023	317-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A1R1024	315-0271-00			RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A23A1R1025	317-0471-00			RES.,FXD,CMPSN:47Q OHM,5%,0.125W	01121	BB4715
A23A1R2010	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2011	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A23A1R2012	317-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A1R2013	317-0241-00			RES.,FXD,CMPSN:240 OHM,5%,0.125W	01121	BB2415
A23A1R2014	317-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.125W	01121	BB2025
A23A1R2016	315-0271-00			RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A23A1R2021	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2023	317-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A1R2024	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A1R2025	317-0241-00			RES.,FXD,CMPSN:240 OHM,5%,0.125W	01121	BB2415
A23A1R2026	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A1R2027	317-0360-00			RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A1R2028	317-0360-00			RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A1R2029	317-0301-00			RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A1TP1011	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
..						
A23A2	670-5937-02	B030000	B041819	CKT BOARD ASSY:25MHZ PHASE LOCK	80009	670-5937-02
A23A2	670-5937-03	B041820		CKT BOARD ASSY:25MHZ PHASE LOCK	80009	670-5937-03
..						
A23A2C1011	283-0176-00			CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A2C1024	283-0176-00			CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A2C1031	283-0204-00			CAP.,FXD,CER D1:0.01UF,20%,50V	96733	R2676
A23A2C1037	283-0204-00			CAP.,FXD,CER D1:0.01UF,20%,50V	96733	R2676
A23A2C1045	283-0204-00			CAP.,FXD,CER D1:0.01UF,20%,50V	96733	R2676
A23A2C1046	283-0176-00			CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A2C1052	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C1057	283-0176-00			CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A2C2011	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2012	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2021	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C2023	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2024	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C2025	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2032	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2041	283-0176-00			CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A2C2042	283-0204-00			CAP.,FXD,CER D1:0.01UF,20%,50V	96733	R2676
A23A2C2051	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2052	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C2053	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2054	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C2055	283-0197-00			CAP.,FXD,CER D1:470PF,5%,100V	72982	8121N075C0G0471J
A23A2C2056	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C2057	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C3021	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3022	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3023	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C
A23A2C3031	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3035	283-0326-00			CAP.,FXD,CER D1:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3038	290-0876-00			CAP.,FXD,ELCTLT:15UF,20%,25V	26769	41PS156Y025M1C

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A2C3042	283-0197-00			CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A2C3043	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3044	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2C3055	283-0186-00			CAP.,FXD,CER DI:27PF,5%,50V	59660	811A058C0G0270J
A23A2C3056	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A2CR2015	152-0141-02			SEMICOND DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A2L2013	108-0543-00	B030000	B041819	COIL,RF:FIXED,1.1UH	80009	108-0543-00
A23A2L2013	108-1140-00	B041820		COIL,RF:FIXED,1MH	80009	108-1140-00
A23A2L2018	108-0543-00	B030000	B041819	COIL,RF:FIXED,1.1UH	80009	108-0543-00
A23A2L2018	108-1140-00	B041820		COIL,RF:FIXED,1MH	80009	108-1140-00
A23A2L2031	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A2L2033	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A2L3011	108-0543-00	B030000	B041819	COIL,RF:FIXED,1.1UH	80009	108-0543-00
A23A2L3011	108-1140-00	B041820		COIL,RF:FIXED,1MH	80009	108-1140-00
A23A2L3034	108-0733-00			COIL,RF:113NH	80009	108-0733-00
A23A2Q2016	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A23A2Q2017	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A23A2Q3015	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A23A2R1021	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R1023	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R1026	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1027	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1029	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1032	317-0047-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A23A2R1033	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1035	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1038	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1041	317-0047-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A23A2R1043	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R1051	317-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A23A2R1058	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R2014	317-0393-00			RES.,FXD,CMPSN:39K OHM,5%,0.125W	01121	BB3935
A23A2R2015	317-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A2R2034	317-0047-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.125W	01121	BB47G5
A23A2R2040	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2041	317-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2043	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2044	317-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2045	317-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A23A2R2046	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2047	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2048	317-0361-00			RES.,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R2049	317-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R2051	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A23A2R2052	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A2R2053	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2054	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2055	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A2R2056	317-0361-00			RES.,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3012	317-0303-00			RES.,FXD,CMPSN:30K OHM,5%,0.125W	01121	BB3035
A23A2R3013	317-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A2R3014	317-0752-00			RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3016	317-0752-00			RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3037	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A2R3041	317-0361-00		RES.,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3045	317-0361-00		RES.,FXD,CMPSN:360 OHM,5%,0.125W	01121	BB3615
A23A2R3046	317-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A2R3051	317-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.125W	01121	BB3325
A23A2R3052	317-0752-00		RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A2R3054	317-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A23A2TP3047	214-0579-00		TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A23A2U1013	156-0285-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM340T-12
A23A2U1022	156-0860-00		MICROCIRCUIT,DI:TRIPLE LINE RECEIVER	80009	156-0860-00
A23A2U1036	156-0230-00		MICROCIRCUIT,DI:DUAL D MA-SLAVE FLIP-FLOP	04713	MC10131 (L OR P)
A23A2U1044	156-0860-00		MICROCIRCUIT,DI:TRIPLE LINE RECEIVER	80009	156-0860-00
A23A2U1053	156-0074-00		MICROCIRCUIT,LI:VIDEO AMPL,DIFF INP-OUT	80009	156-0074-00
A23A2U2026	156-0872-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC7912C
A23A2U2047	156-0230-00		MICROCIRCUIT,DI:DUAL D MA-SLAVE FLIP-FLOP	04713	MC10131 (L OR P)
A23A2U3024	156-0277-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	07263	MICROA7805UC
A23A2U3053	156-0742-00		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	27014	LM318N
A23A2VR1048	152-0647-00		SEMICONV DEVICE:ZENER,0.4W,6.8V,5%	04713	SZG35014K3RL
..					
..					
A23A3	670-6016-00		CKT BOARD ASSY:829MHZ HARMONIC MIXER	80009	670-6016-00
..					
A23A3C1021	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A3C1022	283-0176-00		CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A3C1023	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A3C2021	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A3C2023	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A3C2024	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A3C3011	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A3C3013	283-0176-00		CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A3C3014	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A3C3020	283-0176-00		CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A3C3021	283-0176-00		CAP.,FXD,CER D1:0.0022UF,20%,50V	56289	272C5
A23A3C3022	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A3C3023	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A3C3024	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A3C3025	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A3CR2021	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A23A3CR3011	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A23A3L2014	108-0643-00		COIL,RF:FIXED,54NH	80009	108-0643-00
A23A3L3011	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A3L3012	108-0215-00		COIL,RF:1.1UH	80009	108-0215-00
A23A3L3014	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A3L3021	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A3Q3021	151-0630-00		TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A3R1021	315-0820-00		RES.,FXD,CMPSN:82 OHM,5%,0.25W	01121	CB8205
A23A3R1022	317-0820-00		RES.,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R1023	317-0430-00		RES.,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2021	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R2022	317-0160-00		RES.,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R2023	317-0680-00		RES.,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A23A3R2024	317-0430-00		RES.,FXD,CMPSN:43 OHM,5%,0.125W	01121	BB4305
A23A3R2025	317-0820-00		RES.,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2026	317-0820-00		RES.,FXD,CMPSN:82 OHM,5%,0.125W	01121	BB8205
A23A3R2027	317-0680-00		RES.,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A3R2028	317-0160-00		RES.,FXD,CMPSN:16 OHM,5%,0.125W	01121	BB1605
A23A3R3010	317-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A23A3R3011	315-0271-00		RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A23A3R3012	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A3R3021	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3022	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A3R3023	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A3R3024	317-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A23A3R3025	317-0272-00		RES.,FXD,CMPSN:2.7K OHM,5%,0.125W	01121	BB2725
A23A3R3027	317-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
A23A3R3028	317-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A23A3R3029	317-0750-00		RES.,FXD,CMPSN:75 OHM,5%,0.125W	01121	BB7505
..					
A23A4	670-6256-00		CKT BOARD ASSY:829MHZ DIPLEXER	80009	670-6256-00
..					
A23A4C1010	283-0158-00		CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A23A4C1011	283-0158-00		CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A23A4C1012	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A23A4C1013	283-0158-00		CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A23A4C1014	283-0181-00		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A23A4C1015	283-0181-00		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A23A4C1016	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A4C1017	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A4C1018	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A4C1019	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A4C1021	283-0158-00		CAP.,FXD,CER DI:1PF,10%,50V	51642	100-050-NP0-109B
A23A4L1010	108-1043-00		COIL,RF:FIXED,2MH	80009	108-1043-00
A23A4L1011	108-0598-00		COIL,RF:200UH	80009	108-0598-00
A23A4L1012	108-0578-00		COIL,RF:FIXED,45NH	80009	108-0578-00
A23A4L1015	108-0578-00		COIL,RF:FIXED,45NH	80009	108-0578-00
A23A4R1011	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1012	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1013	317-0200-00		RES.,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A23A4R1014	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A23A4R1015	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
..					
A23A5	670-6255-01		CKT BOARD ASSY:829MHZ AMPLIFIER	80009	670-6255-01
..					
A23A5C1011	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1012	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1013	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1014	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A5C1015	283-0160-00		CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A23A5C1016	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A5C1017	283-0160-00		CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A23A5C1018	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A5C1021	283-0160-00		CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A23A5C1022	283-0160-00		CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A23A5C1023	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A5C1024	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1025	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1026	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A5C1027	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1028	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5C1029	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A5CR1013	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A5CR1022	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A5J1029	131-1003-00		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A23A5L1011	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1012	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1014	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1021	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1024	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1025	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1028	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5L1029	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A5Q1017	151-0630-00		TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A5Q1025	151-0630-00		TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A5R1011	321-0234-00		RES.,FXD,FILM:2.67K OHM,1%,0.125W	91637	MFF1816G26700F
A23A5R1012	321-0202-00		RES.,FXD,FILM:1.24K OHM,1%,0.125W	91637	MFF1816G12400F
A23A5R1013	317-0511-00		RES.,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A23A5R1014	317-0511-00		RES.,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A23A5R1015	317-0151-00		RES.,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A23A5R1016	317-0201-00		RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A5R1020	317-0201-00		RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A5R1021	321-0202-00		RES.,FXD,FILM:1.24K OHM,1%,0.125W	91637	MFF1816G12400F
A23A5R1022	321-0234-00		RES.,FXD,FILM:2.67K OHM,1%,0.125W	91637	MFF1816G26700F
A23A5R1023	317-0151-00		RES.,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A23A5R1024	317-0331-00		RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A5R1025	317-0331-00		RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A5R1026	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A5R1027	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A5R1028	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A5R1029	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
..					
..					
A23A6	670-6015-01		CKT BOARD ASSY:110MHZ IF SELECT	80009	670-6015-01
..					
A23A6C1011	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A6C1012	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A6C1013	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1014	283-0220-00		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A23A6C1015	283-0220-00		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A23A6C1016	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1017	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1018	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1020	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1021	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1022	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1023	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1024	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1025	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1026	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C1027	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1028	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A23A6C1029	283-0326-00		CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A6C2011	283-0220-00		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A23A6C2012	283-0159-00		CAP.,FXD,CER DI:18PF,5%,50V	51642	T150-050NP0180J
A23A6C2014	283-0197-00		CAP.,FXD,CER DI:470PF,5%,100V	72982	8121N075C0G0471J
A23A6C2015	283-0220-00		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A23A6C2016	283-0220-00		CAP.,FXD,CER DI:0.01UF,20%,50V	72982	8121N075X7R0103M
A23A6C2017	283-0154-00		CAP.,FXD,CER DI:22PF,5%,50V	72982	8111B061C0G220J
A23A6CR1011	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1015	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1021	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1022	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1023	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1024	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR1025	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR2011	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR2012	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR2013	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6CR2015	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A23A6E1011	276-0507-00		SHIELDING BEAD,:FERRITE	78488	57-3443
A23A6L1012	108-0420-00		COIL,RF:60NH	80009	108-0420-00
A23A6L1014	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00
A23A6L1015	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1018	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1019	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1021	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A6L1023	108-0550-00		COIL,RF:110NH	80009	108-0550-00
A23A6L1024	108-0550-00		COIL,RF:110NH	80009	108-0550-00
A23A6L1025	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A6L1026	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1027	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1028	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L1029	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L2011	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L2012	108-0683-00		COIL,RF:FIXED,900NH	80009	108-0683-00
A23A6L2013	108-0733-00		COIL,RF:113NH	80009	108-0733-00
A23A6L2014	108-0311-00		COIL,RF:FIXED,153NH	80009	108-0311-00
A23A6L2015	108-0341-00		COIL,RF:FIXED,1.4UH	80009	108-0341-00
A23A6Q1011	151-0630-00		TRANSISTOR:SILICON,NPN	80009	151-0630-00
A23A6Q1012	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A23A6Q1015	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A23A6Q2015	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A23A6Q2021	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A23A6Q2022	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A23A6R1010	317-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.125W	01121	BB4725
A23A6R1011	317-0056-00		RES.,FXD,CMPSN:5.6 OHM,5%,0.125W	01121	BB56G5
A23A6R1012	317-0911-00		RES.,FXD,CMPSN:910 OHM,5%,0.125W	01121	BB9115
A23A6R1013	317-0910-00		RES.,FXD,CMPSN:91 OHM,5%,0.125W	01121	BB9105
A23A6R1014	317-0822-00		RES.,FXD,CMPSN:8.2K OHM,5%,0.125W	01121	BB8225
A23A6R1015	317-0153-00		RES.,FXD,CMPSN:15K OHM,5%,0.125W	01121	BB1535
A23A6R1016	317-0752-00		RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R1017	317-0201-00		RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A23A6R1018	317-0331-00		RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A23A6R1019	317-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A6R2012	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A23A6R2013	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A23A6R2014	317-0391-00		RES.,FXD,CMPSN:390 OHM,5%,0.125W	01121	BB3915
A23A6R2015	317-0181-00		RES.,FXD,CMPSN:180 OHM,5%,0.125W	01121	BB1815
A23A6R2021	317-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.125W	01121	BB2035
A23A6R2022	317-0752-00		RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R2023	317-0752-00		RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R2024	317-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A23A6R2025	317-0752-00		RES.,FXD,CMPSN:7.5K OHM,5%,0.125W	01121	BB7525
A23A6R2026	317-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.125W	01121	BB2025
A23A6T1011	120-1235-00		TRANSFORMER,RF: BALUN,TD-367	80009	120-1235-00
..					
A23A7	670-6224-00		CKT BOARD ASSY:829MHZ SECOND CONVERTER	80009	670-6224-00
..					
A23A7C1011	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A7C1012	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A23A7C1013	283-0069-00		CAP.,FXD,CER DI:15PF,20%,50V	51642	A150050NPU150M
A23A7C1014	283-0069-00		CAP.,FXD,CER DI:15PF,20%,50V	51642	A150050NPU150M
A23A7CR1011	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A23A7CR1012	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A23A7L1011	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A7L1012	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A7L1013	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A7L1014	108-0606-00		COIL,RF:37NH	80009	108-0606-00
A23A7R1012	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7R1013	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1014	317-0360-00		RES.,FXD,CMPSN:36 OHM,5%,0.125W	01121	BB3605
A23A7R1015	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A23A7T1011	120-1251-00		TRANSFORMER,RF: BALUN	80009	120-1251-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A24 A24	119-1010-00 -----		HYBRID CKT ASSY:PHASE GATE DETECTOR (OPTION 03 ONLY - CONTAINS NO ELEC PARTS)	80009	119-1010-00
A24A1 A24A1	670-5957-00 -----		CKT BOARD ASSY:PHASE GATE INPUT (OPTION 03 ONLY)	80009	670-5957-00
A24A1C243	290-0309-00		CAP.,FXD,ELCTLT:100UF,20%,25V	56289	109D107X0025F2
A24A1C244	290-0309-00		CAP.,FXD,ELCTLT:100UF,20%,25V	56289	109D107X0025F2
A24A1CR243	152-0664-00		SEMICONV DEVICE:SWITCHING,SI,70V	50434	5082-2800
A24A1CR244	152-0664-00		SEMICONV DEVICE:SWITCHING,SI,70V	50434	5082-2800
A28	670-5561-01		CKT BOARD ASSY:MAIN MOTHER	80009	670-5561-01
A28W1038	198-4398-00		WIRE SET,ELEC:	80009	198-4398-00

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A30	621-0488-00			POWER SUPPLY:HIGH VOLTAGE (492 ONLY)	80009	621-0488-00
A30	-----					
A30	621-0481-01			POWER SUPPLY: (492P ONLY)	80009	621-0481-01
A30	-----					
A30	621-0483-00			POWER SUPPLY:HIGH VOLTAGE (492 OPTION 30,31,32 ONLY)	80009	621-0483-00
A30	-----					
A30	621-0485-00			POWER SUPPLY:HIGH VOLTAGE (492P OPTION 30,31,32 ONLY)	80009	621-0485-00
A30	-----					
A30B100	119-0830-01			FAN,TUBEAXIAL:12VDC,2.4W,5250 RPM,47CFM	000AX	MODEL 69.11.53
A30B200	119-1364-01			FAN,TUBEAXIAL:12VDC,2.4W,5250 RPM,47CFM	51181	66-02035-003
A30B200	-----			(OPTION 30,31,32 ONLY)		
A30F301	159-0017-00			FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW	71400	MTH4
A30FL301	159-0017-00			FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW	71400	MTH4
A30FL302	119-1390-00			FILTER,RFI:POT CORE SET	80009	119-1390-00
A30S300	260-1931-00			SWITCH,PRCN:SPST,NO,10(4)A,250V	000FJ	1005.0925
A30S301	260-1931-00			SWITCH,PRCN:SPST,NO,10(4)A,250V	000FJ	1005.0925
A30S301	-----			(OPTION 30,31,32 ONLY)		
A30U307	119-1168-00			CAPACITOR-RES:0.1UF,20% & 22 OHM,10%,250V	14752	RG1782-1
A30W300	198-3944-01			WIRE SET,ELEC:	80009	198-3944-01
A30W560	175-3405-00			CA ASSY,SP,ELEC:28,26 AWG,18.0 INCH LONG	80009	175-3405-00
A30W560	-----			(492P ONLY)		
A30W620	175-3619-01			CABLE ASSY,RF:50 OHM COAX,16.0 L SEMI-RGD	80009	175-3619-01
A30A1	670-5564-01	B030000	B042145	CKT BOARD ASSY:MAIN POWER SUPPLY	80009	670-5564-01
A30A1	670-5564-02	B042146		CKT BOARD ASSY:MAIN POWER SUPPLY	80009	670-5564-02
A30A1C1055	290-0758-00			CAP.,FXD,ELCTL:2.2UF,+50-10%,160V	56289	502D227
A30A1C1063	285-1089-00			CAP.,FXD,PLSTC:0.04UF,5%,900V	50558	PA6-0787J
A30A1C1095	285-1196-00			CAP.,FXD,PAPER:0.01UF,20%,250V	84411	PME 271 Y 510
A30A1C2024	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C2030	283-0238-00			CAP.,FXD,CER DI:0.01UF,10%,50V	72982	8121N075X7R0103K
A30A1C2032	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C2033	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C2034	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C2035	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A30A1C2041	290-0758-00			CAP.,FXD,ELCTL:2.2UF,+50-10%,160V	56289	502D227
A30A1C2043	290-0800-00			CAP.,FXD,ELCTL:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C2045	290-0758-00			CAP.,FXD,ELCTL:2.2UF,+50-10%,160V	56289	502D227
A30A1C2053	290-0758-00			CAP.,FXD,ELCTL:2.2UF,+50-10%,160V	56289	502D227
A30A1C2057	290-0758-00			CAP.,FXD,ELCTL:2.2UF,+50-10%,160V	56289	502D227
A30A1C2096	285-1196-00			CAP.,FXD,PAPER:0.01UF,20%,250V	84411	PME 271 Y 510
A30A1C3031	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C3033	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C3034	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C3035	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A30A1C3036	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C3037	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C3041	290-0770-00			CAP.,FXD,ELCTL:100UF,+50-10%,25V	56289	502D230
A30A1C3051	290-0771-00			CAP.,FXD,ELCTL:220UF,+50-10%,10VDC	56289	502D231
A30A1C3057	290-0852-00			CAP.,FXD,ELCTL:1UF,+75-10%,350V	54473	ECE-A2350V1
A30A1C3064	285-1196-00			CAP.,FXD,PAPER:0.01UF,20%,250V	84411	PME 271 Y 510
A30A1C3071	285-0981-00			CAP.,FXD,PLSTC:2.0UF,10%,400V	14752	C-2585

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A30A1C3074	285-1040-00		CAP.,FXD,PLSTC:0.0012UF,10%,4000V	56289	430P522
A30A1C3085	285-1196-00		CAP.,FXD,PAPER:0.01UF,20%,250V	84411	PME 271 Y 510
A30A1C3089	285-1196-00		CAP.,FXD,PAPER:0.01UF,20%,250V	84411	PME 271 Y 510
A30A1C4012	290-0745-00		CAP.,FXD,ELCTLT:22UF,+50-10%,25V	54473	ECE-A25V22L
A30A1C4014	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C4015	283-0211-00		CAP.,FXD,CER DI:0.1UF,10%,200V	04222	SR06C104KAA
A30A1C4016	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C4022	290-0745-00		CAP.,FXD,ELCTLT:22UF,+50-10%,25V	54473	ECE-A25V22L
A30A1C4023	290-0942-00		CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A30A1C4024	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C4032	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C4033	290-0770-00		CAP.,FXD,ELCTLT:100UF,+50-10%,25V	56289	502D230
A30A1C4035	290-0745-00		CAP.,FXD,ELCTLT:22UF,+50-10%,25V	54473	ECE-A25V22L
A30A1C4036	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C4044	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C4046	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C4051	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C4055	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C4082	283-0263-00		CAP.,FXD,CER DI:0.0022UF,20%,3000V	59660	828556Y5R0222M
A30A1C5010	283-0008-00		CAP.,FXD,CER DI:0.1UF,20%,500V	56289	3C37X7R104M500B
A30A1C5012	290-0758-00		CAP.,FXD,ELCTLT:2.2UF,+50-10%,160V	56289	502D227
A30A1C5017	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C5018	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C5021	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C5022	290-0745-00		CAP.,FXD,ELCTLT:22UF,+50-10%,25V	54473	ECE-A25V22L
A30A1C5038	285-0699-00		CAP.,FXD,PLSTC:0.0047UF,10%,100V	56289	192P4/292R440
A30A1C5051	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C5054	290-0800-00		CAP.,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H0200M5C
A30A1C5071	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C5072	290-0804-00		CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A30A1C5082	283-0263-00		CAP.,FXD,CER DI:0.0022UF,20%,3000V	59660	828556Y5R0222M
A30A1C5084	290-0114-00		CAP.,FXD,ELCTLT:47UF,20%,6V	56289	150D476X0006B2
A30A1C5085	290-0114-00		CAP.,FXD,ELCTLT:47UF,20%,6V	56289	150D476X0006B2
A30A1C5113	283-0211-00		CAP.,FXD,CER DI:0.1UF,10%,200V	04222	SR06C104KAA
A30A1C6010	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C6019	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A30A1C6025	290-0523-00		CAP.,FXD,ELCTLT:2.2UF,20%,20V	56289	196D225X0020HA1
A30A1C6039	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A30A1C6048	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A30A1C6053	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A30A1C6055	283-0620-00		CAP.,FXD,MICA D:470PF,1%,300V	00853	D155F4771FO
A30A1C6058	283-0620-00		CAP.,FXD,MICA D:470PF,1%,300V	00853	D155F4771FO
A30A1C6059	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C6062	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A30A1C6068	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A1C6069	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A30A1C6071	283-0067-00		CAP.,FXD,CER DI:0.001UF,10%,200V	59660	835-515-Z5D0102K
A30A1C6072	283-0067-00		CAP.,FXD,CER DI:0.001UF,10%,200V	59660	835-515-Z5D0102K
A30A1C6101	290-0829-00		CAP.,FXD,ELCTLT:750UF,+100-10%,200V	90201	PPF751SR2J3P2
A30A1C6111	290-0829-00		CAP.,FXD,ELCTLT:750UF,+100-10%,200V	90201	PPF751SR2J3P2
A30A1CR1022	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR1034	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR1042	152-0400-00		SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR2027	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A30A1CR2028	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR2035	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR2061	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR2063	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR2065	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR2079	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR3027	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR3028	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR3035	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR3052	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR3053	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR3054	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR3055	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR3056	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR3096	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR3098	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR4021	152-0066-00			SEMICON D DEVICE:SILICON,400V,750MA	14433	LG4016
A30A1CR4034	152-0066-00			SEMICON D DEVICE:SILICON,400V,750MA	14433	LG4016
A30A1CR4037	152-0066-00			SEMICON D DEVICE:SILICON,400V,750MA	14433	LG4016
A30A1CR4053	152-0640-00			SEMICON D DEVICE:SILICON,35V,30A,DO-4	01281	SD-4101
A30A1CR4057	152-0640-00			SEMICON D DEVICE:SILICON,35V,30A,DO-4	01281	SD-4101
A30A1CR4061	152-0720-00			SEMICON D DEVICE:SILICON,100V,7A	80009	152-0720-00
A30A1CR4062	152-0720-00			SEMICON D DEVICE:SILICON,100V,7A	80009	152-0720-00
A30A1CR4063	152-0720-00			SEMICON D DEVICE:SILICON,100V,7A	80009	152-0720-00
A30A1CR4065	152-0720-00			SEMICON D DEVICE:SILICON,100V,7A	80009	152-0720-00
A30A1CR4094	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR4095	152-0661-00			SEMICON D DEVICE:RECT,SI,600V,3A,FAST	04713	MR856
A30A1CR5031	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR5052	152-0721-00			SEMICON D DEVICE:RECT,SI,100V,12A,FAST REC	25403	BYW30-100U
A30A1CR5055	152-0742-00			SEMICON D DEVICE:RECT,SI,100V,12A	80009	152-0742-00
A30A1CR5062	152-0721-00			SEMICON D DEVICE:RECT,SI,100V,12A,FAST REC	25403	BYW30-100U
A30A1CR5065	152-0742-00			SEMICON D DEVICE:RECT,SI,100V,12A	80009	152-0742-00
A30A1CR6014	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6015	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6016	152-0066-00			SEMICON D DEVICE:SILICON,400V,750MA	14433	LG4016
A30A1CR6018	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6047	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6049	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6052	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6053	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6055	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6061	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6071	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR6072	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1CR6073	152-0400-00			SEMICON D DEVICE:SILICON,400V,1A	80009	152-0400-00
A30A1CR6074	152-0141-02			SEMICON D DEVICE:SILICON,30V,150MA	01295	1N4152R
A30A1DS5112	150-0035-00			LAMP,GLOW:90V,0.3MA,AID-T,WIRE LD	000LI	JH005/3011JA
A30A1E1094	119-0181-00			ARSR,ELEC SURGE:230V,GAS FILLED	74276	CG230L
A30A1E2095	119-0181-00			ARSR,ELEC SURGE:230V,GAS FILLED	74276	CG230L
A30A1F1013	159-0025-00			FUSE,CARTRIDGE:3AG,0.5A,250V,FAST-BLOW	71400	AGC 1/2
A30A1F1017	159-0021-00			FUSE,CARTRIDGE:3AG,2A,250V,FAST-BLOW	71400	AGC 2
A30A1F1033	159-0062-00	B030000	B041454	FUSE,CARTRIDGE:8AG,0.062A,250V	71400	AGX1/16
A30A1F1033	159-0213-00	B041455		FUSE,CARTRIDGE:0.062A,250V,FAST BLO	71400	1/16A
A30A1F1035	159-0052-00			FUSE,CARTRIDGE:3AG,0.125A,250V,FAST-BLOW	03614	AGC 1/8

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A30A1F2013	159-0016-00			FUSE,CARTRIDGE:3AG,1.5A,250V,FAST-BLOW	71400	AGC 1 1/2
A30A1F3038	159-0116-00	B030000	B042145	FUSE,CARTRIDGE:1A,125V,0.4 SEC,0.17 LEADS	75915	273001
A30A1F3038	159-0128-00	B042146		FUSE,CARTRIDGE:2A,125V,5 SEC	75915	273002
A30A1J1091	131-2250-00			CONN,RCPT,ELEC:CKT BD,5 MALE	27264	09-61-1053
A30A1L1051	108-0960-00			COIL,RF:FIXED,3.9MH TOROIDAL	80009	108-0960-00
A30A1L1081	108-1052-00			COIL,RF:FIXED,580UH	80009	108-1052-00
A30A1L2048	108-0959-00			COIL,RF:FIXED,150MH	80009	108-0959-00
A30A1L3012	108-0795-00			COIL,RF:FIXED,2NH	80009	108-0795-00
A30A1L3042	108-0958-00			COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1L3043	108-0959-00			COIL,RF:FIXED,150MH	80009	108-0959-00
A30A1L3047	108-0958-00			COIL,RF:FIXED,50UH	80009	108-0958-00
A30A1L3088	108-0961-00			COIL,RF:FIXED,140NH,TOROIDAL	80009	108-0961-00
A30A1Q2021	151-0625-00			TRANSISTOR:SILICON,PNP	03508	D45H11
A30A1Q2023	151-0710-00			TRANSISTOR:SILICON,NPN	27014	2N6715/92 PU01A
A30A1Q2024	151-0625-00			TRANSISTOR:SILICON,PNP	03508	D45H11
A30A1Q2031	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A1Q2061	151-0703-00			TRANSISTOR:SILICON,NPN	80009	151-0703-00
A30A1Q2071	151-0703-00			TRANSISTOR:SILICON,NPN	80009	151-0703-00
A30A1Q3022	151-0625-00			TRANSISTOR:SILICON,PNP	03508	D45H11
A30A1Q3023	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A30A1Q5013	151-0622-00			TRANSISTOR:SILICON,PNP	27014	92PU51A
A30A1Q5023	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A1Q5032	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A30A1Q6034	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A1Q6041	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A1Q6077	151-0444-00			TRANSISTOR:SILICON,NPN	04713	SPS797
A30A1Q6078	151-0444-00			TRANSISTOR:SILICON,NPN	04713	SPS797
A30A1R2015	308-0463-00			RES.,FXD,WW:0.3 OHM,1%,3W	91637	RS2B-KR3000F
A30A1R2017	308-0643-00			RES.,FXD,WW:0.1 OHM,3%,3W	91637	RS2B-ER1000H
A30A1R2022	315-0562-00			RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A30A1R2023	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A30A1R2025	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A30A1R2026	321-0376-00			RES.,FXD,FILM:80.6K OHM,1%,0.125W	91637	MFF1816G80601F
A30A1R2030	315-0242-00			RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A30A1R2031	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R2032	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A30A1R2034	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A30A1R2035	315-0621-00			RES.,FXD,CMPSN:620 OHM,5%,0.25W	01121	CB6215
A30A1R2036	321-0289-07			RES.,FXD,FILM:10K OHM,0.1%,0.125W	91637	MFF1816C10001B
A30A1R2037	321-0318-07			RES.,FXD,FILM:20K OHM,0.1%,0.125W	24546	NE55E2002B
A30A1R2038	321-0340-00			RES.,FXD,FILM:34K OHM,1%,0.125W	91637	MFF1816G34001F
A30A1R2039	321-0315-00			RES.,FXD,FILM:18.7K OHM,1%,0.125W	91637	CMF55-116G18701F
A30A1R2057	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A30A1R2073	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A30A1R3019	308-0463-00			RES.,FXD,WW:0.3 OHM,1%,3W	91637	RS2B-KR3000F
A30A1R3021	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A30A1R3022	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R3024	301-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
A30A1R3025	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A30A1R3026	315-0271-00			RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A30A1R3028	321-0344-00			RES.,FXD,FILM:37.4K OHM,1%,0.125W	91637	MFF1816G37401F
A30A1R3029	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R3031	321-0372-00			RES.,FXD,FILM:73.2K OHM,1%,0.125W	91637	MFF1816G73201F
A30A1R3032	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A30A1R3033	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R3034	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A30A1R3036	321-0193-00		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A30A1R3037	321-0604-00		RES.,FXD,FILM:30K OHM,0.25%,0.125W	91637	MFF1816D30001C
A30A1R3039	321-0289-03		RES.,FXD,FILM:10K OHM,0.25%,0.125W	91637	MFF1816D10001C
A30A1R3084	303-0271-00		RES.,FXD,CMPSN:270 OHM,5%,1W	01121	GB2715
A30A1R3089	301-0433-00		RES.,FXD,CMPSN:43K OHM,5%,0.50W	01121	EB4335
A30A1R3091	301-0433-00		RES.,FXD,CMPSN:43K OHM,5%,0.50W	01121	EB4335
A30A1R4017	301-0823-00		RES.,FXD,CMPSN:82K OHM,5%,0.50W	01121	EB8235
A30A1R4018	301-0165-00		RES.,FXD,CMPSN:1.6M OHM,5%,0.50W	01121	EB1655
A30A1R4031	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A30A1R4083	315-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A30A1R4092	308-0054-00		RES.,FXD,WW:10K OHM,5%,5W	91637	CW5-10001J
A30A1R5006	307-0023-00		RES.,FXD,CMPSN:4.7 OHM,10%,0.50W	01121	EB47G1
A30A1R5014	321-0193-00		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A30A1R5015	321-0353-00		RES.,FXD,FILM:46.4K OHM,1%,0.125W	91637	MFF1816G46401F
A30A1R5016	307-0103-00		RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A30A1R5019	315-0362-00		RES.,FXD,CMPSN:3.6K OHM,5%,0.25W	01121	CB3625
A30A1R5033	315-0182-00		RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825
A30A1R5034	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A30A1R5035	315-0622-00		RES.,FXD,CMPSN:6.2K OHM,5%,0.25W	01121	CB6225
A30A1R5036	321-0381-00		RES.,FXD,FILM:90.9K OHM,1%,0.125W	91637	MFF1816G90901F
A30A1R5039	301-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
A30A1R5043	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R5047	321-0327-00		RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F
A30A1R5083	307-0023-00		RES.,FXD,CMPSN:4.7 OHM,10%,0.50W	01121	EB47G1
A30A1R5087	308-0154-00		RES.,FXD,WW:25K OHM,5%,10W	91637	H11205Z725001J
A30A1R5111	301-0565-00		RES.,FXD,CMPSN:5.6M OHM,5%,0.50W	01121	EB5655
A30A1R6011	321-0631-00		RES.,FXD,FILM:12.5K OHM,1%,0.125W	91637	MFF1816G12501F
A30A1R6013	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R6017	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A30A1R6019	321-0289-03		RES.,FXD,FILM:10K OHM,0.25%,0.125W	91637	MFF1816D10001C
A30A1R6020	315-0183-00		RES.,FXD,CMPSN:18K OHM,5%,0.25W	01121	CB1835
A30A1R6021	315-0361-00		RES.,FXD,CMPSN:360 OHM,5%,0.25W	01121	CB3615
A30A1R6022	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R6023	321-0227-00		RES.,FXD,FILM:2.26K OHM,1%,0.125W	91637	MFF1816G22600F
A30A1R6024	321-0289-03		RES.,FXD,FILM:10K OHM,0.25%,0.125W	91637	MFF1816D10001C
A30A1R6028	311-1489-00		RES.,VAR,NONWIR:500 OHM,10%,0.75W	73138	89-136-1
A30A1R6029	315-0151-00		RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A30A1R6032	321-0317-00		RES.,FXD,FILM:19.6K OHM,1%,0.125W	91637	MFF1816G19601F
A30A1R6033	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R6035	315-0105-00		RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A30A1R6037	321-0816-00		RES.,FXD,FILM:5K OHM,1%,0.125W	24546	NA55D5001F
A30A1R6038	321-0299-00		RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A30A1R6041	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A30A1R6042	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A30A1R6045	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R6046	315-0820-00		RES.,FXD,CMPSN:82 OHM,5%,0.25W	01121	CB8205
A30A1R6048	321-0327-00		RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F
A30A1R6052	321-0250-00		RES.,FXD,FILM:3.92K OHM,1%,0.125W	91637	MFF1816G39200F
A30A1R6056	321-0337-00		RES.,FXD,FILM:31.6K OHM,1%,0.125W	91637	MFF1816G31601F
A30A1R6057	321-0321-00		RES.,FXD,FILM:21.5K OHM,1%,0.125W	91637	MFF1816G21501F
A30A1R6058	321-0230-00		RES.,FXD,FILM:2.43K OHM,1%,0.125W	91637	MFF1816G24300F
A30A1R6061	311-0644-00		RES.,VAR,NONWIR:20K OHM,10%,0.50W	73138	82-34-1

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A30A1R6063	315-0205-00			RES.,FXD,CMPSN:2M OHM,5%,0.25W	01121	CB2055
A30A1R6073	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A30A1R6074	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R6075	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A30A1R6076	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1R6091	308-0054-00			RES.,FXD,WW:10K OHM,5%,5W	91637	CW5-10001J
A30A1R6093	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A1RT2093	307-0353-00			RES.,FXD,FILM:5 OHM,10%,DISC	15454	5DA5RO-K-270SS
A30A1RT2097	307-0353-00			RES.,FXD,FILM:5 OHM,10%,DISC	15454	5DA5RO-K-270SS
A30A1S2103	159-0169-00			FUSE,THERMAL:15A,1200V,104 DEG C	27012	4218A1
A30A1T2080	120-1287-00			TRANSFORMER,RF:TOROID,2 WINDS	80009	120-1287-00
A30A1T4071	120-1239-00			XFMR,PWR,SDN&SU:HF	80009	120-1239-00
A30A1T4084	120-0640-00			XFMR,TOROID:18 TURNS,BIFILAR	80009	120-0640-00
A30A1T6044	120-1350-00			TRANSFORMER,RF:TOROID,2 WINDS	80009	120-1350-00
A30A1T6081	120-1234-00			TRANSFORMER:BASE DRIVE	80009	120-1234-00
A30A1U2037	156-0495-02			MICROCIRCUIT,LI:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A30A1U3036	156-0853-00			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,DUAL	27014	LM358N
A30A1U3093	119-1168-00			CAPACITOR-RES:0.1UF,20% & 22 OHM,10%,250V	14752	RG1782-1
A30A1U3103	119-1168-00			CAPACITOR-RES:0.1UF,20% & 22 OHM,10%,250V	14752	RG1782-1
A30A1U6016	156-0853-00			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,DUAL	27014	LM358N
A30A1U6036	156-1126-01			MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A30A1U6043	156-1162-00			CPLR,PTOELECTR:LED,2500V,8 DIP	50438	6N136
A30A1U6046	156-1225-00			MICROCIRCUIT,LI:DUAL COMPARATOR,8 DIP	27014	LM393N
A30A1U6053	156-1408-00			MICROCIRCUIT,LI:TIMER,LOW POWER	32293	ICM75551PA
A30A1U6059	156-1408-00			MICROCIRCUIT,LI:TIMER,LOW POWER	32293	ICM75551PA
A30A1U6063	156-0366-02			MICROCIRCUIT,DI:DUAL D FLIP-FLOP,CHK	80009	156-0366-02
A30A1U6069	156-0793-02			MICROCIRCUIT,DI:DUAL 4 INPUT NAND GATE	80009	156-0793-02
A30A1VR5045	152-0279-00			SEMICONV DEVICE:ZENER,0.4W,5.1V,5%	04713	SZG35010RL
A30A1VR5073	152-0149-00			SEMICONV DEVICE:ZENER,0.4W,10V,5%	04713	SZG35009K3
A30A1VR6026	152-0486-00			SEMICONV DEVICE:ZENER,0.25W,6.2V,5%	80009	152-0486-00
A30A1W6043	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A30A2	670-5933-00	B030000	B031618	CKT BOARD ASSY:FAN DRIVE	80009	670-5933-00
A30A2	670-7226-00	B031619		CKT BOARD ASSY:FAN DRIVE	80009	670-7226-00
A30A2C1017	283-0024-00			CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A30A2C1018	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A30A2C1019	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A30A2C1026	290-0523-00			CAP.,FXD,ELCTLT:2.2UF,20%,20V	56289	196D225X0020HA1
A30A2C1028	290-0523-00			CAP.,FXD,ELCTLT:2.2UF,20%,20V	56289	196D225X0020HA1
A30A2C1032	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A30A2C1033	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A30A2C2012	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A30A2C2018	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A30A2C2028	290-0523-00			CAP.,FXD,ELCTLT:2.2UF,20%,20V	56289	196D225X0020HA1
A30A2CR2040	152-0066-00			SEMICONV DEVICE:SILICON,400V,750MA	14433	LG4016
A30A2Q1010	151-0521-00			SCR:SI,MU-27	03508	C122B
A30A2Q1018	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A30A2Q1020	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A30A2Q1025	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A2Q1038	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A30A2Q1044	151-0334-00			TRANSISTOR:SILICON,NPN	04713	SJE914
A30A2Q2020	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A30A2Q2025	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A30A2Q2030	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A30A2R1015	315-0270-00		RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A30A2R1017	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A30A2R1024	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A30A2R1026	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A30A2R1027	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A30A2R1028	315-0163-00		RES.,FXD,CMPSN:16K OHM,5%,0.25W	01121	CB1635
A30A2R1029	315-0223-00		RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A30A2R1031	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A30A2R1032	315-0163-00		RES.,FXD,CMPSN:16K OHM,5%,0.25W	01121	CB1635
A30A2R1033	315-0393-00		RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A30A2R1036	315-0223-00		RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A30A2R2014	315-0333-00		RES.,FXD,CMPSN:33K OHM,5%,0.25W	01121	CB3335
A30A2R2016	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A30A2R2019	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A30A2R2034	315-0163-00		RES.,FXD,CMPSN:16K OHM,5%,0.25W	01121	CB1635
A30A2R2035	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A30A2R2036	315-0223-00		RES.,FXD,CMPSN:22K OHM,5%,0.25W	01121	CB2235
A30A2R2039	315-0361-00		RES.,FXD,CMPSN:360 OHM,5%,0.25W	01121	CB3615
A30A2R2042	315-0623-00		RES.,FXD,CMPSN:62K OHM,5%,0.25W	01121	CB6235
A30A2RT2045	307-0472-00		RES.,THERMAL:100K OHM,5% DISC	15801	JP51J5
A30A2VR1015	152-0175-00		SEMICONV DEVICE:ZENER,0.4W,5.6V,5%	04713	SZG35008
A30A57	670-5556-00		CKT BOARD ASSY:GPIB INTERFACE	80009	670-5556-00
A30A57	-----		(492P ONLY)		
A30A57C1011	290-0524-00		CAP.,FXD,ELCTLT:4.7UF,20%,10V	90201	TDC475M010EL
A30A57C1012	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A57C1013	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A57L1011	108-0836-00		COIL,RF:14 UH TOROIDAL INDUCTOR	80009	108-0836-00
A30A57R1011	317-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A30A57S1011	260-1721-00		SWITCH,ROCKER:8,SPST,125MA,30VDC	00779	435166-5
A30A57U1011	156-1415-00		MICROCIRCUIT,DI:OCTAL GPIB XCVR MTG BUS	01295	SN75161A
A30A57U1012	156-1414-00		MICROCIRCUIT,DI:OCTAL GPIB XCVR DATA BUS	01295	SN75160
A30A76	670-5558-01		CKT BOARD ASSY:ACCESSORIES INTERFACE	80009	670-5558-01
A30A76C2012	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A76C2024	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A76C2036	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A76C2038	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A30A76CR1013	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A30A76R1013	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A30A76R2019	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A30A76R2038	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A30A76U2015	156-1111-02		MICROCIRCUIT,DI:OCTAL BUS TRANSCEIVERS	01295	SN74LS245JP3
A30A76U2025	156-1111-02		MICROCIRCUIT,DI:OCTAL BUS TRANSCEIVERS	01295	SN74LS245JP3
A30A76U2033	156-1111-02		MICROCIRCUIT,DI:OCTAL BUS TRANSCEIVERS	01295	SN74LS245JP3
A30A76U2038	156-0381-02		MICROCIRCUIT,DI:QUAD 2-INP EXCL OR GATE	01295	SN74LS86

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A32	119-1015-00		FILTER,AMPL:110MHZ	80009	119-1015-00
A32C321	281-0825-00		CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A32C323	281-0825-00		CAP.,FXD,CER DI:0.005UF,+100-0%,100V	33095	51-726-008
A32C325	281-0165-00		CAP.,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A32P320	131-0938-00		CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A32P321	131-0938-00		CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A32Q3018	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A32A1	670-5525-01		CKT BOARD ASSY:110 I.F. AMPLIFIER	80009	670-5525-01
A32A1C1012	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C1022	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C2010	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C2012	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C2029	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C2035	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A32A1C2036	290-0574-00		CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A32A1C2037	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C2047	281-0164-00		CAP.,VAR AIR DI:0.6-6PF,250V	73899	MVM-006W
A32A1C2051	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C3032	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A32A1C3036	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C3043	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C3044	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C3045	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C4020	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C4026	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C4035	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C4036	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A32A1C4045	283-0156-00		CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A32A1CR1029	152-0579-00		SEMICONV DEVICE:SILICON,100V,2.5A	12969	UM6601B
A32A1CR3030	152-0579-00		SEMICONV DEVICE:SILICON,100V,2.5A	12969	UM6601B
A32A1E3036	276-0507-00		SHIELDING BEAD,;FERRITE	78488	57-3443
A32A1E4046	276-0507-00		SHIELDING BEAD,;FERRITE	78488	57-3443
A32A1L1039	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A32A1L2044	108-0956-00		COIL,RF:FIXED,AIR COIL	80009	108-0956-00
A32A1Q3018	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A32A1Q4037	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A32A1Q4053	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A32A1R1012	301-0330-00		RES.,FXD,CMPSN:33 OHM,5%,0.50W	01121	EB3305
A32A1R1015	311-1281-00		RES.,VAR,NONWIR:2.5K OHM,10%,0.5W	32997	3329W-L58-252
A32A1R2014	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A32A1R2019	315-0511-00		RES.,FXD,CMPSN:510 OHM,5%,0.25W	01121	CB5115
A32A1R2028	321-0210-00		RES.,FXD,FILM:1.5K OHM,1%,0.125W	91637	MFF1816G15000F
A32A1R2029	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A32A1R2030	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A32A1R2032	317-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A32A1R2038	317-0180-00		RES.,FXD,CMPSN:18 OHM,5%,0.125W	01121	BB1805
A32A1R2039	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A32A1R2043	317-0301-00		RES.,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A32A1R3014	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A32A1R3029	317-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A32A1R3035	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A32A1R3042	315-0271-00			RES.,FXD,CMPSN:270 OHM,5%,0.25W	01121	CB2715
A32A1R4012	301-0330-00			RES.,FXD,CMPSN:33 OHM,5%,0.50W	01121	EB3305
A32A1R4018	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A32A1R4029	307-0113-00			RES.,FXD,CMPSN:5.1 OHM,5%,0.25W	01121	CB51G5
A32A1R4030	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A32A1R4032	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A32A1R4038	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A32A1R4039	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A32A1R4043	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A32A1R4047	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A32A1R4058	315-0241-00			RES.,FXD,CMPSN:240 OHM,5%,0.25W	01121	CB2415
A32A1T2020	120-0902-00			XFMR,TOROID:5 TURNS,BIFILAR	80009	120-0902-00
A32A1T3041	120-1235-00			TRANSFORMER,RF:BALUN,TD-367	80009	120-1235-00
A32A1T3054	120-1235-00			TRANSFORMER,RF:BALUN,TD-367	80009	120-1235-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A34	119-1023-00	B030000	B041449	OSC/MIXER ASSY:100MHZ (492 ONLY)	80009	119-1023-00
A34	-----					
A34	119-1023-01	B041450		OSC/MIXER ASSY:100MHZ (492 ONLY)	80009	119-1023-01
A34	-----					
A34	119-1023-00	B030000	B041659	OSC/MIXER ASSY:100MHZ (492P ONLY)	80009	119-1023-00
A34	-----					
A34	119-1023-01	B041660		OSC/MIXER ASSY:100MHZ (492P ONLY)	80009	119-1023-01
A34	-----					
A34C341	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A34C342	281-0697-00			CAP.,FXD,CER DI:5000PF,+100-0%,100V	80009	281-0697-00
A34P340	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34P341	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34P344	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34P346	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34P348	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34P350	131-0938-00			CONNECTOR,RCPT,;50 OHM MALE SNAP-ON	98291	051-043-0349
A34U1010	156-0285-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM340T-12
A34U2010	156-0872-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC7912C
A34A1	670-5526-00	B030000	B041449	CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-00
A34A1	670-5526-02	B041450		CKT BOARD ASSY:110 MIXER/OSC	80009	670-5526-02
A34A1	670-5526-00	B030000	B041659	CKT BOARD ASSY:110 MIXER/OSC (492P ONLY)	80009	670-5526-00
A34A1	-----					
A34A1	670-5526-02	B041660		CKT BOARD ASSY:110 MIXER/OSC (492P ONLY)	80009	670-5526-02
A34A1	-----					
A34A1C1016	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C1017	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C1023	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C1024	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C1036	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C1041	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C1045	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C1056	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A34A1C2012	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C2013	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C2021	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C2022	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A34A1C2025	283-0140-00			CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A34A1C2026	281-0503-00	B030000	B041449	CAP.,FXD,CER DI:8PF,+/-0.5PF,500V	59660	0301-080-COHO-80
A34A1C2026	-----			(492 ONLY)		
A34A1C2026	283-0168-00	B041450		CAP.,FXD,CER DI:12PF,5%,100V (492 ONLY)	72982	8101B121C0G0120J
A34A1C2026	-----					
A34A1C2026	281-0503-00	B030000	B041659	CAP.,FXD,CER DI:8PF,+/-0.5PF,500V (492P ONLY)	59660	0301-080-COHO-80
A34A1C2026	-----					
A34A1C2026	283-0168-00	B041660		CAP.,FXD,CER DI:12PF,5%,100V	72982	8101B121C0G0120J
A34A1C2026	-----					
A34A1C2026	-----			(492P ONLY)		
A34A1C2037	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A34A1C2041	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C3014	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3019	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3024	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A34A1C3029	281-0221-00			CAP.,VAR,CER DI:2-10PF,100V	59660	513-013A 2 0-10
A34A1C3031	281-0153-00			CAP.,VAR,AIR DI:1.7-10PF,250V	74970	187-0106-005
A34A1C3039	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3046	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3047	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3056	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C3057	283-0114-00			CAP.,FXD,CER DI:0.0015UF,5%,200V	59660	805534Y5D0152J
A34A1C3058	281-0549-00			CAP.,FXD,CER DI:68PF,10%,500V	59660	301-000U2J0680K
A34A1C4011	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4012	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4021	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4026	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C4027	283-0156-00			CAP.,FXD,CER DI:1000PF,+100-0%,200V	96733	R2670
A34A1C4028	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4029	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A34A1C4031	290-0720-00			CAP.,FXD,ELCTLT:68UF,20%,15V	56289	196D686X0015PE3
A34A1C4032	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4043	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A34A1C4044	290-0720-00			CAP.,FXD,ELCTLT:68UF,20%,15V	56289	196D686X0015PE3
A34A1CR2054	152-0715-00			SEMICONV DEVICE: SCHOTTKY,SI,RING QUAD	80009	152-0715-00
A34A1CR3045	152-0269-00			SEMICONV DEVICE: SILICON,VAR V CAP.,4V,33PF	04713	SMV1263
A34A1E2015	276-0532-00			SHIELDING BEAD,:	02114	56-590-65/4A6
A34A1E2016	276-0532-00			SHIELDING BEAD,:	02114	56-590-65/4A6
A34A1E3015	276-0532-00			SHIELDING BEAD,:	02114	56-590-65/4A6
A34A1E4018	276-0532-00			SHIELDING BEAD,:	02114	56-590-65/4A6
A34A1L1055	108-0606-00			COIL,RF:37NH	80009	108-0606-00
A34A1L2029	108-0963-00	B030000	B041449	COIL,RF:FIXED,100NH TOROIDAL INDUCT (492 ONLY)	80009	108-0963-00
A34A1L2029	-----					
A34A1L2029	108-1129-00	B041450		COIL,RF:FIXED,100MH (492 ONLY)	80009	108-1129-00
A34A1L2029	-----					
A34A1L2029	108-0963-00	B030000	B041659	COIL,RF:FIXED,100NH TOROIDAL INDUCT (492P ONLY)	80009	108-0963-00
A34A1L2029	-----					
A34A1L2029	108-1129-00	B041660		COIL,RF:FIXED,100MH (492P ONLY)	80009	108-1129-00
A34A1L2029	-----					
A34A1L3024	108-0965-00			COIL,RF:FIXED,170NH	80009	108-0965-00
A34A1L4024	108-0598-00			COIL,RF:200UH	80009	108-0598-00
A34A1L4055	108-0311-00			COIL,RF:FIXED,153NH	80009	108-0311-00
A34A1Q1031	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q1048	151-0446-00			TRANSISTOR:SILICON,NPN	80009	151-0446-00
A34A1Q2015	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q2016	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q2031	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q2036	151-0446-00			TRANSISTOR:SILICON,NPN	80009	151-0446-00
A34A1Q2046	151-0446-00			TRANSISTOR:SILICON,NPN	80009	151-0446-00
A34A1Q3015	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q3041	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1Q4018	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A34A1R1014	317-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.125W	01121	BB1215
A34A1R1015	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R1016	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A34A1R1018	321-0144-00	B030000	B041449	RES.,FXD,FILM:309 OHM,1%,0.125W	91637	MFF1816G309R0F
A34A1R1018	-----			(492 ONLY)		
A34A1R1018	321-0179-00	B041450		RES.,FXD,FILM:715 OHM,1%,0.125W	91637	MFF1816G715R0F
A34A1R1018	-----			(492 ONLY)		
A34A1R1018	321-0144-00	B030000	B041449	RES.,FXD,FILM:309 OHM,1%,0.125W	91637	MFF1816G309R0F
A34A1R1018	-----			(492P ONLY)		
A34A1R1018	321-0179-00	B041450		RES.,FXD,FILM:715 OHM,1%,0.125W	91637	MFF1816G715R0F
A34A1R1018	-----			(492P ONLY)		
A34A1R1023	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R1025	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R1027	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R1028	317-0680-00			RES.,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A34A1R1035	317-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A34A1R1042	321-0155-00			RES.,FXD,FILM:402 OHM,1%,0.125W	91637	MFF1816G402R0F
A34A1R1043	317-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R1045	311-1261-00			RES.,VAR, NONWIR:500 OHM,10%,0.50W	32997	3329P-L58-501
A34A1R2019	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R2021	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R2022	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R2023	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R2024	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R2025	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R2037	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R2038	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A34A1R2039	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R2041	315-0221-00	B030000	B041449	RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A34A1R2041	-----			(492 ONLY)		
A34A1R2041	301-0101-00	B041450		RES.,FXD,CMPSN:100 OHM,5%,0.50W	01121	EB1015
A34A1R2041	-----			(492 ONLY)		
A34A1R2041	315-0221-00	B030000	B041659	RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A34A1R2041	-----			(492P ONLY)		
A34A1R2041	301-0101-00	B041660		RES.,FXD,CMPSN:100 OHM,5%,0.50W	01121	EB1015
A34A1R2041	-----			(492P ONLY)		
A34A1R2046	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A34A1R2049	317-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A34A1R2056	317-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A34A1R3011	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R3012	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R3015	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R3016	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R3017	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A34A1R3021	317-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R3028	317-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3033	317-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A34A1R3039	317-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A34A1R3041	315-0242-00			RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A34A1R3042	317-0680-00			RES.,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A34A1R3045	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R3046	315-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.25W	01121	CB3315
A34A1R3049	317-0240-00			RES.,FXD,CMPSN:24 OHM,5%,0.125W	01121	BB2405
A34A1R4012	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R4016	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R4018	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A34A1R4021	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A34A1R4022	317-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A34A1R4046	317-0201-00		RES.,FXD,CMPSN:200 OHM,5%,0.125W	01121	BB2015
A34A1R4055	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A34A1T1053	120-1113-00		XFMR,RF:BALUN,TD-343	80009	120-1113-00
A34A1T2026	120-0902-00		XFMR,TOROID:5 TURNS,BIFILAR	80009	120-0902-00
A34A1T2041	120-1113-00		XFMR,RF:BALUN,TD-343	80009	120-1113-00
A34A1T3053	120-1236-00		XFMR,RF:BALUN,TD-368	80009	120-1236-00
A34A1Y3036	158-0236-00		XTAL UNIT,QTZ:100MHZ,0.005%,SERIES	71034	BK-3
A34A2	670-6204-00		CKT BOARD ASSY:100MHZ L/O REGULATOR	80009	670-6204-00
A34A2C1010	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A34A2C2010	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A38	670-7050-00			CKT BOARD ASSY:FRONT PANEL	80009	670-7050-00
A38C1011	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C1013	283-0730-00			CAP.,FXD,MICA D:274PF,1%,500V	00853	D155F1250F0
A38C1019	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C1024	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C1025	290-0512-00			CAP.,FXD,ELCTLT:22UF,20%,15V	56289	196D226X0015KA1
A38C1044	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C2025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C4015	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A38C4023	290-0523-00			CAP.,FXD,ELCTLT:2.2UF,20%,20V	56289	196D225X0020HA1
A38C4026	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A38C4029	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C4041	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C5021	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C5028	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38C6091	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A38CR1026	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR2026	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR2027	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR4022	152-0322-00			SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A38CR5022	152-0322-00			SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A38CR6029	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR6032	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR6033	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR6034	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR6035	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38CR6082	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A38DS1029	150-0093-01			LAMP,INCAND:5V,0.06A,0.05 MSCP,SEL	87034	9AS15
A38DS1048	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS1054	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS1121	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS2014	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS2016	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS2122	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS2123	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3035	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3036	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3037	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3038	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3043	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3044	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3045	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3046	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3047	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3048	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3052	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3053	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3055	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3122	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS3123	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS4046	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS4052	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A38DS4122	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A38DS4123	150-1068-00		LT EMITTING DIO:RED	50434	HLMP-6320
A38DS5015	150-1029-00		LT EMITTING DIO:GREEN,565NM,35MA	53184	XC209G
A38DS5050	150-1068-00		LT EMITTING DIO:RED	50434	HLMP-6320
A38DS5120	150-1068-00		LT EMITTING DIO:RED	50434	HLMP-6320
A38DS5124	150-1031-00		LT EMITTING DIO:RED,650NM,40MA MAX	53184	XC209R
A38DS6046	150-1033-00		LT EMITTING DIO:YELLOW,585NM,40MA MAX	50434	HLMP 1401
A38DS6052	150-1068-00		LT EMITTING DIO:RED	50434	HLMP-6320
A38DS6062	150-1068-00		LT EMITTING DIO:RED	50434	HLMP-6320
A38L1021	108-0598-00		COIL,RF:200UH	80009	108-0598-00
A38Q6028	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A38R1014	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A38R1015	315-0243-00		RES.,FXD,CMPSN:24K OHM,5%,0.25W	01121	CB2435
A38R1022	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A38R1031	315-0563-00		RES.,FXD,CMPSN:56K OHM,5%,0.25W	01121	CB5635
A38R1037	315-0563-00		RES.,FXD,CMPSN:56K OHM,5%,0.25W	01121	CB5635
A38R1121	311-2051-00		RES.,VAR,NONWIR:10K OHM,20%,0.5W	01121	WRA1A046S102M
A38R2014	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A38R2045	307-0594-00		RES NTWK,FXD FI:7.220 OHM,2%,1.0W	91637	CSP08G01221G
A38R3039	307-0499-00		RES.,FXD,FILM:100K OHM,5%,0.125W	91637	MSP10A01104J
A38R3128	307-0594-00		RES NTWK,FXD FI:7.220 OHM,2%,1.0W	91637	CSP08G01221G
A38R4026	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A38R4028	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A38R4043	311-2051-00		RES.,VAR,NONWIR:10K OHM,20%,0.5W	01121	WRA1A048S102M
A38R4050	307-0594-00		RES NTWK,FXD FI:7.220 OHM,2%,1.0W	91637	CSP06G01221G
A38R4120	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A38R4121	311-2051-00		RES.,VAR,NONWIR:10K OHM,20%,0.5W	01121	WRA1A048S102M
A38R5015	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A38R5022	315-0153-00		RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A38R5028	315-0153-00		RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A38R6025	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A38R6028	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A38R6029	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A38R6041	315-0221-00		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A38R6042	307-0594-00		RES NTWK,FXD FI:7.220 OHM,2%,1.0W	91637	CSP08G01221G
A38R6047	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A38R6049	311-2049-00		RES.,VAR,NONWIR:5K OHM,20%,0.5W	01121	WRA1A028S502M
A38R6051	311-2050-00		RES.,VAR,NONWIR:1K OHM,20%,0.5W	01121	WRA1A028S102M
A38R6056	321-0187-00		RES.,FXD,FILM:866 OHM,1%,0.125W	91637	MFF1816G866R0F
A38R6062	311-2054-00		RES.,VAR,NONWIR:20K OHM,20%,0.5W	01121	WRA1A048S203M
A38R6076	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A38R6082	321-0198-00		RES.,FXD,FILM:1.13K OHM,1%,0.125W	91637	MFF1816G11300F
A38R6083	321-0250-00		RES.,FXD,FILM:3.92K OHM,1%,0.125W	91637	MFF1816G39200F
A38R6104	311-2052-00		RES.,VAR,NONWIR:20K OHM,20%,0.5W	01121	WRA1A028S203M
A38R6106	311-2052-00		RES.,VAR,NONWIR:20K OHM,20%,0.5W	01121	WRA1A028S203M
A38S1023	263-0020-02		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-02
A38S1048	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S1054	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S1121	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S2014	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S2020	263-0020-02		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-02
A38S2035	263-0054-00		SWITCH,ROTARY:OPTICAL	80009	263-0054-00
A38S2056	263-0020-02		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-02

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A38S2122	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S2123	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3035	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3036	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3036	-----		(OPTION 03 ONLY)		
A38S3037	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3038	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3043	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3043	-----		(OPTION 02 ONLY)		
A38S3044	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3044	-----		(OPTION 02 ONLY)		
A38S3045	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3045	-----		(OPTION 02 ONLY)		
A38S3046	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3047	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3048	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3048	-----		(OPTION 02 ONLY)		
A38S3052	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3053	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3055	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3122	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S3123	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S4046	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S4046	-----		(OPTION 02 ONLY)		
A38S4052	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S4052	-----		(OPTION 02 ONLY)		
A38S4122	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S4123	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S5050	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S5120	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S6052	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38S6062	263-0020-01		SWITCH,PB ASSY:MOMENTARY	80009	263-0020-01
A38U1011	156-0402-03		MICROCIRCUIT,LI:TIMER,TESTED	80009	156-0402-03
A38U1047	156-0956-02		MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A38U2018	156-0388-03		MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A38U2045	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164
A38U3012	156-0382-02		MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A38U3014	156-0720-02		MICROCIRCUIT,DI:HEX DRVR,4 TO 2 LINE	01295	SN74LS368
A38U3030	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164
A38U3039	156-1153-00		MICROCIRCUIT,DI:KEYBOARD ENCODER	80009	156-1153-00
A38U4015	156-0388-03		MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A38U4020	156-1207-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR,-12V	04713	MC79L12ACG
A38U4031	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A38U5025	156-0876-00		MICROCIRCUIT,DI:HEX SCMITT TRIGGER	80009	156-0876-00
A38U5045	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164
A38U6025	156-0786-02		MICROCIRCUIT,DI:QUAD EXCLUSIVE OR GATE	04713	MC14070BCLD
A38U6075	156-0651-02		MICROCIRCUIT,DI:8 BIT PRL-OUT SER SHF RGTR	01295	SN74LS164
A38U6090	156-1161-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM317T

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A40	670-5539-01		CKT BOARD ASSY:VIDEO PROCESSOR	80009	670-5539-01
A40C2016	285-1056-00		CAP.,FXD,PLSTC:1UF,2%,50V	14752	650B1A105G
A40C2051	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C2051	-----		(OPTION 01 ONLY)		
A40C2057	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C2057	-----		(OPTION 01 ONLY)		
A40C2061	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C2061	-----		(OPTION 01 ONLY)		
A40C2066	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C2068	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C2068	-----		(OPTION 01 ONLY)		
A40C3011	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3015	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3026	285-0597-00		CAP.,FXD,PLSTC:0.001UF,1%,100V	14752	41OB1B102F
A40C3034	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3034	-----		(OPTION 01 ONLY)		
A40C3035	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3037	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3042	290-0158-00		CAP.,FXD,ELCTLT:50UF,+75-15%,25V	56289	109D506C7025F2
A40C3045	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3045	-----		(OPTION 01 ONLY)		
A40C3048	290-0261-00		CAP.,FXD,ELCTLT:6.8UF,10%,35V	12954	D6R8B35K1
A40C3052	290-0261-00		CAP.,FXD,ELCTLT:6.8UF,10%,35V	12954	D6R8B35K1
A40C3056	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3058	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3058	-----		(OPTION 01 ONLY)		
A40C3059	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C3062	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C4011	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C4014	283-0024-00		CAP.,FXD,CER DI:0.1UF,+80-20%,50V	72982	8121N083Z5U0104Z
A40C4061	283-0644-00		CAP.,FXD,MICA D:150PF,1%,500V	00853	D155F151F0
A40CR2051	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A40CR2051	-----		(OPTION 01 ONLY)		
A40CR3045	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A40CR3045	-----		(OPTION 01 ONLY)		
A40L4052	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40L4053	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A40Q3038	151-0261-00		TRANSISTOR:SILICON,PNP,DUAL	04713	SD441
A40Q3038	-----		(OPTION 01 ONLY)		
A40Q4025	151-0224-00		TRANSISTOR:SILICON,NPN	07263	SA24850
A40Q4025	-----		(OPTION 01 ONLY)		
A40R1013	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1013	-----		(OPTION 01 ONLY)		
A40R1015	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1015	-----		(OPTION 01 ONLY)		
A40R1019	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1019	-----		(OPTION 01 ONLY)		
A40R1022	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1022	-----		(OPTION 01 ONLY)		
A40R1024	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1024	-----		(OPTION 01 ONLY)		
A40R1026	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1026	-----		(OPTION 01 ONLY)		

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A40R1028	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1028	----		(OPTION 01 ONLY)		
A40R1032	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1032	----		(OPTION 01 ONLY)		
A40R1034	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1034	----		(OPTION 01 ONLY)		
A40R1036	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1036	----		(OPTION 01 ONLY)		
A40R1038	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1038	----		(OPTION 01 ONLY)		
A40R1043	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1043	----		(OPTION 01 ONLY)		
A40R1045	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1045	----		(OPTION 01 ONLY)		
A40R1047	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1047	----		(OPTION 01 ONLY)		
A40R1051	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1051	----		(OPTION 01 ONLY)		
A40R1053	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1053	----		(OPTION 01 ONLY)		
A40R1057	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1057	----		(OPTION 01 ONLY)		
A40R1059	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1059	----		(OPTION 01 ONLY)		
A40R1061	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1061	----		(OPTION 01 ONLY)		
A40R1063	321-0166-00		RES.,FXD,FILM:523 OHM,1%,0.125W	91637	MFF1816G523R0F
A40R1063	----		(OPTION 01 ONLY)		
A40R1065	311-1339-00		RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	89-131-1
A40R1065	----		(OPTION 01 ONLY)		
A40R1067	321-0360-00		RES.,FXD,FILM:54.9K OHM,1%,0.125W	91637	MFF1816G54901F
A40R1067	----		(OPTION 01 ONLY)		
A40R1069	311-1319-00		RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A40R1069	----		(OPTION 01 ONLY)		
A40R2021	321-0265-00		RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A40R2021	----		(OPTION 01 ONLY)		
A40R2022	321-0361-00		RES.,FXD,FILM:56.2K OHM,1%,0.125W	91637	MFF1816G56201F
A40R2022	----		(OPTION 01 ONLY)		
A40R2023	321-0452-00		RES.,FXD,FILM:499K OHM,1%,0.125W	91637	MFF1816G49902F
A40R2023	----		(OPTION 01 ONLY)		
A40R2051	321-0231-00		RES.,FXD,FILM:2.49K OHM,1%,0.125W	91637	MFF1816G24900F
A40R2051	----		(OPTION 01 ONLY)		
A40R2053	321-0097-00		RES.,FXD,FILM:100 OHM,1%,0.125W	91637	MFF1816G100R0F
A40R2053	----		(OPTION 01 ONLY)		
A40R2054	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A40R2054	----		(OPTION 01 ONLY)		
A40R2055	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A40R2055	----		(OPTION 01 ONLY)		
A40R2056	321-0277-00		RES.,FXD,FILM:7.5K OHM,1%,0.125W	91637	MFF1816G75000F
A40R2056	----		(OPTION 01 ONLY)		
A40R2057	321-0362-00		RES.,FXD,FILM:57.6K OHM,1%,0.125W	91637	MFF1816G57601F
A40R2057	----		(OPTION 01 ONLY)		
A40R2058	321-0264-00		RES.,FXD,FILM:5.49K OHM,1%,0.125W	91637	MFF1816G54900F
A40R2058	----		(OPTION 01 ONLY)		
A40R2064	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A40R2064	----		(OPTION 01 ONLY)		
A40R2066	321-0327-00		RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F
A40R2066	----		(OPTION 01 ONLY)		

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A40R3011	321-0304-00		RES.,FXD,FILM:14.3K OHM,1%,0.125W	91637	MFF1816G14301F
A40R3012	321-0308-00		RES.,FXD,FILM:15.8K OHM,1%,0.125W	91637	MFF1816G15801F
A40R3022	315-0122-00		RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A40R3024	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A40R3025	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A40R3025	-----		(OPTION 01 ONLY)		
A40R3026	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A40R3026	-----		(OPTION 01 ONLY)		
A40R3028	321-0298-00		RES.,FXD,FILM:12.4K OHM,1%,0.125W	91637	MFF1816G12401F
A40R3046	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A40R3046	-----		(OPTION 01 ONLY)		
A40R3053	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A40R3058	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A40R3059	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A40R3064	315-0152-00		RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A40R3065	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A40R4011	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A40R4012	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A40R4013	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A40R4014	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A40R4015	321-0328-00		RES.,FXD,FILM:25.5K OHM,1%,0.125W	91637	MFF1816G25501F
A40R4017	321-0308-00		RES.,FXD,FILM:15.8K OHM,1%,0.125W	91637	MFF1816G15801F
A40R4018	321-0304-00		RES.,FXD,FILM:14.3K OHM,1%,0.125W	91637	MFF1816G14301F
A40R4022	315-0162-00		RES.,FXD,CMPSN:1.6K OHM,5%,0.25W	01121	CB1625
A40R4023	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A40R4023	-----		(OPTION 01 ONLY)		
A40R4024	321-0304-00		RES.,FXD,FILM:14.3K OHM,1%,0.125W	91637	MFF1816G14301F
A40R4025	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A40R4025	-----		(OPTION 01 ONLY)		
A40R4046	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A40R4065	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A40R4065	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A40R4066	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A40R4067	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A40U2015	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A40U2039	155-0106-00		MICROCIRCUIT,DI:NORMAL CKT ML	80009	155-0106-00
A40U2039	-----		(OPTION 01 ONLY)		
A40U2055	156-0158-04		MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A40U2055	-----		(OPTION 01 ONLY)		
A40U2066	156-0770-00		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	27014	LF356H
A40U3015	156-0570-00		MICROCIRCUIT,LI:DUAL HIGH SPEED COMPARATOR	27014	LM319H
A40U3025	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A40U3035	156-0913-02		MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A40U3040	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A40U3045	156-0158-04		MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A40U3045	-----		(OPTION 01 ONLY)		
A40U3062	156-0770-00		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	27014	LF356H
A40U3063	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A40VR3011	152-0662-00		SEMICONV DEVICE:ZENER,0.4W,5V,1%	04713	SZG195
A40VR4011	152-0662-00		SEMICONV DEVICE:ZENER,0.4W,5V,1%	04713	SZG195

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A42 A42	670-5552-03 -----		CKT BOARD ASSY:PRESELECTOR DRIVER (OPTION 01 ONLY)	80009	670-5552-03
A42C2026	283-0070-00		CAP.,FXD,CER DI:30PF,10%,50V	72982	8121-060C0G0300K
A42C2045	283-0070-00		CAP.,FXD,CER DI:30PF,10%,50V	72982	8121-060C0G0300K
A42C2065	283-0330-00		CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A42C3021	283-0190-00		CAP.,FXD,CER DI:0.47UF,5%,50V	72982	8141N077X7R0474J
A42C3028	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A42C3043	283-0004-00		CAP.,FXD,CER DI:0.02UF,+80-20%,150V	59821	SDDH69J203Z
A42C3048	283-0051-00		CAP.,FXD,CER DI:0.0033UF,5%,100V	56289	1C20C0G332J100B
A42C3052	283-0070-00		CAP.,FXD,CER DI:30PF,10%,50V	72982	8121-060C0G0300K
A42C3061	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A42C4038	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A42C4041	290-0718-00		CAP.,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42C4044	290-0718-00		CAP.,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42C4061	290-0158-00		CAP.,FXD,ELCTLT:50UF,+75-15%,25V	56289	109D506C7025F2
A42C4071	290-0513-00		CAP.,FXD,ELCTLT:510UF,+75-10%,25V	56289	109D575
A42C5026	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A42C5041	290-0718-00		CAP.,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42C5046	290-0718-00		CAP.,FXD,ELCTLT:22UF,20%,35V	56289	196D226X0035PE4
A42C5051	290-0755-00		CAP.,FXD,ELCTLT:100UF,+50-10%,10V	55680	ULA1A01TEA
A42C5061	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A42CR1020	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A42CR1021	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A42CR2065	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A42CR2077	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A42CR2078	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A42CR3061	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A42CR3073	152-0353-00		SEMICONV DEVICE:SILICON,RECT,800V,1W	05828	GP10K-014
A42CR4012	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A42CR4013	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A42CR4032	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A42CR4061	152-0333-00		SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A42L4056	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A42L5051	108-0881-00		COIL,RF:FIXED,40.1UH	80009	108-0881-00
A42Q1011	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A42Q1022	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A42Q2024	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A42Q2034	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A42Q2036	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A42Q2074	151-1022-00		TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A42Q3025	151-0290-00		TRANSISTOR:SILICON,NPN	07263	S032790
A42Q3061	151-1045-00		TRANSISTOR:SILICON,JFE,P-CHANNEL	04713	SPS628
A42Q3077	151-1066-00		TRANSISTOR:SILICON,FE,P-CHANNEL	27014	SF88025
A42Q4025	151-0134-00		TRANSISTOR:SILICON,PNP	80009	151-0134-00
A42Q4037	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A42Q5052	151-0429-00		TRANSISTOR:SILICON,PNP	04713	SJE957
A42R1013	315-0273-00		RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A42R1017	321-0363-00		RES.,FXD,FILM:59K OHM,1%,0.125W	91637	MFF1816G59001F
A42R1018	321-0376-00		RES.,FXD,FILM:80.6K OHM,1%,0.125W	91637	MFF1816G80601F
A42R1019	315-0105-00		RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R1021	321-1654-07		RES.,FXD,FILM:651K OHM,0.1%,0.125W	91637	HMF188C65102B
A42R1022	325-0322-00		RES.,FXD,FILM:26.35K OHM,0.1%,1PPM	07088	K747 26.35K OHM
A42R1023	325-0321-00		RES.,FXD,FILM:50.87K OHM,0.05%,1PPM	07088	K747 50.87K OHM

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A42R1024	325-0320-00			RES.,FXD,FILM:7.532K OHM,0.05%,1PPM	07088	K747 7.532K OHM
A42R1025	321-0450-01			RES.,FXD,FILM:475K OHM,0.5%,0.125W	24546	NA55D4753D
A42R1026	325-0317-00			RES.,FXD,FILM:84.9K OHM,0.1%,1PPM	07088	K747 84.9K OHM
A42R1027	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R1031	311-1319-00			RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A42R1032	325-0319-00			RES.,FXD,FILM:100K OHM,0.1%,1PPM	07088	K747 100.0K OHM
A42R1033	321-0414-00			RES.,FXD,FILM:200K OHM,1%,0.125W	91637	MFF1816G20002F
A42R1034	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R1035	321-0510-00			RES.,FXD,FILM:2M OHM,1%,0.125W	91637	HFF188G20003F
A42R1036	321-1653-04			RES.,FXD,FILM:2.25M OHM,0.1%,0.125W	91637	HMF188D22503B
A42R1037	321-0405-00			RES.,FXD,FILM:162K OHM,1%,0.125W	91637	MFF1816G16202F
A42R1045	311-1319-00			RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A42R1049	311-1319-00			RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A42R1052	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1054	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1056	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1061	311-1319-00			RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A42R1063	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1064	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1065	311-1337-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A42R1073	325-0318-00			RES.,FXD,FILM:95.7K OHM,0.5%,1PPM	07088	K747 95.7K OHM
A42R1074	321-1652-04			RES.,FXD,FILM:375K OHM,0.1%,0.125W	91637	MFF1816D37502B
A42R1075	325-0325-00			RES.,FXD,FILM:35.97K OHM,0.1%,1 PPM	07088	K747 35.97K OHM
A42R1076	325-0328-00			RES.,FXD,FILM:141K OHM,1%,0.50W	18612	A104D 141K OHM
A42R2012	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A42R2013	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A42R2014	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A42R2015	321-0771-01			RES.,FXD,FILM:50 OHM,0.5%,0.125W	91637	MFF1816G50R00D
A42R2021	325-0324-00			RES.,FXD,FILM:50K OHM,0.1%,1PPM	07088	K747 50.0K OHM
A42R2022	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R2027	321-0319-00			RES.,FXD,FILM:20.5K OHM,1%,0.125W	91637	MFF1816G20501F
A42R2036	321-0347-00			RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A42R2062	321-0753-06			RES.,FXD,FILM:9K OHM,0.25%,0.125W	91637	MFF1816C90000C
A42R2063	321-0753-06			RES.,FXD,FILM:9K OHM,0.25%,0.125W	91637	MFF1816C90000C
A42R2064	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R2066	311-1264-00			RES.,VAR,NONWIR:1.5K OHM,10%,0.50W	32997	3329P-L58-152
A42R2069	321-0441-00			RES.,FXD,FILM:383K OHM,1%,0.125W	91637	MFF1816G38302F
A42R2072	321-0449-00			RES.,FXD,FILM:464K OHM,1%,0.125W	91637	MFF1816G46402F
A42R2073	321-0891-00			RES.,FXD,FILM:800K OHM,1%,0.125W	91637	MFF1816G80002F
A42R2074	321-0415-00			RES.,FXD,FILM:205K OHM,1%,0.125W	91637	MFF1816G20502F
A42R2075	321-0995-00			RES.,FXD,FILM:549K OHM,1%,0.125W	24546	NA55D5493F
A42R2077	321-0432-00			RES.,FXD,FILM:309K OHM,1%,0.125W	91637	MFF1816G30902F
A42R2078	321-0441-00			RES.,FXD,FILM:383K OHM,1%,0.125W	91637	MFF1816G38302F
A42R3011	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A42R3012	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A42R3013	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A42R3014	321-0460-00			RES.,FXD,FILM:604K OHM,1%,0.125W	91637	MFF1816G60402F
A42R3021	321-0356-00			RES.,FXD,FILM:49.9K OHM,1%,0.125W	91637	MFF1816G49901F
A42R3028	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A42R3041	325-0316-00			RES.,FXD,FILM:57.55K OHM,0.1%,1PPM	07088	K747 57.55K OHM
A42R3042	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A42R3043	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A42R3044	321-0434-00			RES.,FXD,FILM:324K OHM,1%,0.125W	91637	MFF1816G32402F
A42R3045	321-0891-00			RES.,FXD,FILM:800K OHM,1%,0.125W	91637	MFF1816G80002F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A42R3046	325-0319-00			RES.,FXD,FILM:100K OHM,0.1%,1PPM	07088	K747 100.0K OHM
A42R3047	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A42R3048	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A42R3052	325-0315-00			RES.,FXD,FILM:20K OHM,0.05%,1PPM	07088	K747 20.0K OHM
A42R3053	325-0315-00			RES.,FXD,FILM:20K OHM,0.05%,1PPM	07088	K747 20.0K OHM
A42R3054	321-0320-00			RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A42R3055	321-0284-00			RES.,FXD,FILM:8.87K OHM,1%,0.125W	91637	MFF1816G88700F
A42R3056	321-0357-03			RES.,FXD,FILM:51.1K OHM,0.25%,0.125W	91637	MFF1816D51101C
A42R3061	321-0451-00			RES.,FXD,FILM:487K OHM,1%,0.125W	91637	MFF1816G48702F
A42R3072	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A42R4011	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A42R4013	321-0440-00			RES.,FXD,FILM:374K OHM,1%,0.125W	91637	MFF1816G37402F
A42R4014	321-0642-00			RES.,FXD,FILM:20.3K OHM,0.25%,0.125W	91637	MFF1816C20301C
A42R4016	315-0113-00			RES.,FXD,CMPSN:11K OHM,5%,0.25W	01121	CB1135
A42R4030	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A42R4031	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A42R4032	315-0273-00			RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A42R4040	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A42R4041	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A42R4042	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A42R4043	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A42R4044	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A42R4048	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A42R4051	321-0238-00			RES.,FXD,FILM:2.94K OHM,1%,0.125W	91637	MFF1816G29400F
A42R4052	321-0265-00			RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A42R4054	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A42R4063	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A42R4064	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A42R5015	315-0242-00			RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A42R5064	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A42R5065	315-0755-00			RES.,FXD,CMPSN:7.5M OHM,5%,0.25W	01121	CB7555
A42R5066	315-0475-00			RES.,FXD,CMPSN:4.7M OHM,5%,0.25W	01121	CB4755
A42U1011	156-0158-04			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A42U1067	156-0937-00			MICROCIRCUIT,LI:VOLTAGE REFERENCE	24355	AD580LH
A42U2028	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A42U2028	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A42U2028	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A42U2028	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A42U2045	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A42U2045	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A42U2045	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A42U2045	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A42U2047	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A42U2047	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A42U2047	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A42U2047	-----					
A42U2047	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A42U2047	-----					
A42U2054	156-0420-00			MICROCIRCUIT,LI:PREAMPLIFIER	27014	LM321H
A42U3054	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A42U3054	-----					
A42U3054	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A42U3054	-----					
A42U3054	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A42U3054	-----					
A42U3054	156-0512-03	B041470		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A42U3054	-----					
A42U4061	156-0385-02			MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A42U5022	156-0411-00			MICROCIRCUIT,LI:QUAD-COMP,SGL SUPPLY	27014	LM339N
A42U5031	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A42U5036	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A42VR3011	152-0265-00			SEMICONV DEVICE:ZENER,0.4W,24V,5%	04713	SZG35009K8
A42VR3012	152-0281-00			SEMICONV DEVICE:ZENER,0.4W,22V,5%	12954	1N969B
A42VR3061	152-0514-00			SEMICONV DEVICE:ZENER,0.4W,10V,1%	80009	152-0514-00
A42VR3074	152-0120-00			SEMICONV DEVICE:ZENER,1W,10V,5%	04713	SZ1619
A42W3048	131-0556-00			BUS CONDUCTOR:CKT CD,12 FEM,PH BRZ	80009	131-0556-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A44	670-5551-03	B030000	B041844	CKT BOARD ASSY:1ST L.O.DRIVER	80009	670-5551-03
A44	670-5551-04	B041845	B042699	CKT BOARD ASSY:1ST L.O.DRIVER	80009	670-5551-04
A44	670-5551-05	B042700		CKT BOARD ASSY:1ST L.O.DRIVER	80009	670-5551-05
A44C1011	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A44C1018	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A44C1020	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C1029	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C2011	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A44C2017	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C2018	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A44C2019	290-0804-00			CAP.,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULA1E100TEA
A44C2021	283-0176-00			CAP.,FXD,CER DI:0.0022UF,20%,50V	56289	272C5
A44C2022	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C2025	290-0301-00			CAP.,FXD,ELCTLT:10UF,10%,20V	56289	150D106X9020B2
A44C2026	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C2032	283-0060-00			CAP.,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44C2042	283-0065-00	B041845		CAP.,FXD,CER DI:0.001UF,5%,100V	59660	0835-591Y5E0102J
A44C2043	283-0213-00	B041845		CAP.,FXD,CER DI:300PF,5%,100V	72982	8121N130C0G0301J
A44C2044	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A44C2045	283-0005-00			CAP.,FXD,CER DI:0.01UF,+100-0%,250V	72982	8131N300Z5U0103P
A44C2046	283-0060-00			CAP.,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44C2048	283-0212-00			CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A44C2050	283-0195-00			CAP.,FXD,CER DI:680PF,5%,50V	72982	8121N075C0G0681J
A44C2051	283-0005-00			CAP.,FXD,CER DI:0.01UF,+100-0%,250V	72982	8131N300Z5U0103P
A44C2054	283-0060-00			CAP.,FXD,CER DI:100PF,5%,200V	59660	855-535U2J101J
A44C2056	290-0302-00			CAP.,FXD,ELCTLT:100UF,10%,20V	12954	ST613C107K010M
A44C3013	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C3019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A44C3020	283-0175-00			CAP.,FXD,CER DI:10PF,5%,200V	96733	TDR43BY100DP
A44C3027	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C3033	283-0326-00			CAP.,FXD,CER DI:0.082UF,10%,50V	72982	8121N075X7R0823K
A44C3034	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A44C3038	290-0312-00	B030000	B042699	CAP.,FXD,ELCTLT:47UF,10%,35V	56289	150D476X9035S2
A44C3038	290-0982-00	B042700		CAP.,FXD,ELCTLT:47UF,10%,35V	05397	T110D476K035AS
A44C3039	290-0574-00			CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A44C3045	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A44C3046	290-0158-00			CAP.,FXD,ELCTLT:50UF,+75-15%,25V	56289	109D506C7025F2
A44C3047	290-0776-00			CAP.,FXD,ELCTLT:22UF,+50-10%,10V	55680	ULA1A220TEA
A44C3048	283-0191-00			CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A44C3055	290-0302-00			CAP.,FXD,ELCTLT:100UF,10%,20V	12954	ST613C107K010M
A44C4014	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A44C4016	290-0778-00			CAP.,FXD,ELCTLT:1UF,+50-10%,50V	54473	ECE-A50N1
A44C4046	290-0574-00			CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A44C4055	283-0077-00			CAP.,FXD,CER DI:330PF,5%,500V	59660	831-500B331J
A44CR1051	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR1053	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR1054	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR2024	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR3014	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR3031	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A44CR3044	152-0323-00			SEMICONV DEVICE:SILICON,35V,0.1A	80009	152-0323-00
A44CR3047	152-0333-00			SEMICONV DEVICE:SILICON,55V,200MA	07263	FDH-6012
A44K3034	148-0064-00			RELAY,REED:SPST	95348	F81-1441

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A44L4038	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44L4041	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00
A44Q1028	151-0190-00			TRANSISTOR:SILICON,NPN	07263	S032677
A44Q2025	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A44Q2026	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A44Q2029	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A44Q2033	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A44Q2035	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A44Q2039	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A44Q2040	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A44Q2045	151-0619-00			TRANSISTOR:SILICON,NPN,DUAL	27014	SL41341
A44Q2051	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A44Q2052	151-0619-00			TRANSISTOR:SILICON,NPN,DUAL	27014	SL41341
A44Q3019	151-1097-00			TRANSISTOR:SILICON,FE	04713	SPF713
A44Q3028	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A44Q3042	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A44Q3047	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A44Q3049	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A44R1011	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A44R1013	311-1240-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	72-30-0	
A44R1014	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A44R1015	321-0363-00			RES.,FXD,FILM:59K OHM,1%,0.125W	91637	MFF1816G59001F
A44R1018	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A44R1019	321-0363-00			RES.,FXD,FILM:59K OHM,1%,0.125W	91637	MFF1816G59001F
A44R1020	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R1021	321-0222-00			RES.,FXD,FILM:2K OHM,1%,0.125W	91637	MFF1816G20000F
A44R1022	311-1240-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	72-30-0
A44R1023	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R1024	321-0162-00			RES.,FXD,FILM:475 OHM,1%,0.125W	91637	MFF1816G475R0F
A44R1025	317-0012-00			RES.,FXD,FILM:475 OHM,1%,0.125W	91637	MFF1816G475R0F
A44R1026	311-1240-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	72-30-0
A44R1027	321-0286-00			RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F
A44R1028	321-0332-00	B030000	B042699	RES.,FXD,FILM:28K OHM,1%,0.125W	91637	MFF1816G28001F
A44R1028	321-0325-00	B042700		RES.,FXD,FILM:23.7K OHM,1%,0.125W	91637	MFF1816G23701F
A44R1029	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R1030	317-0102-00	B042700		RES.,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A44R1031	311-1337-00	B030000	B031142	RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	89-129-1
A44R1031	311-2168-00	B031143		RES.,VAR,NONWIR:TRMR,10K OHM,10%,0.5W	18612	1280 10K OHM 10%
A44R1032	311-1319-00	B030000	B031142	RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A44R1032	311-2168-00	B031143		RES.,VAR,NONWIR:TRMR,10K OHM,10%,0.5W	18612	1280 10K OHM 10%
A44R1034	311-1319-00	B030000	B031142	RES.,VAR,NONWIR:10K OHM,10%,0.75W	73138	89-126-1
A44R1034	311-2168-00	B031143		RES.,VAR,NONWIR:TRMR,10K OHM,10%,0.5W	18612	1280 10K OHM 10%
A44R1035	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R1036	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R1038	321-0289-07			RES.,FXD,FILM:10K OHM,0.1%,0.125W	91637	MFF1816C10001B
A44R1039	321-0273-00			RES.,FXD,FILM:6.81K OHM,1%,0.125W	91637	MFF1816G68100F
A44R1041	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R1042	321-0322-00			RES.,FXD,FILM:22.1K OHM,1%,0.125W	91637	MFF1816G22101F
A44R1043	321-0322-00			RES.,FXD,FILM:22.1K OHM,1%,0.125W	91637	MFF1816G22101F
A44R1044	321-0090-00			RES.,FXD,FILM:84.5 OHM,1%,0.125W	91637	MFF1816G84R50F
A44R1045	321-0207-00			RES.,FXD,FILM:1.4K OHM,1%,0.125W	91637	MFF1816G14000F
A44R1047	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A44R1048	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A44R1049	321-0306-00			RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A44R1050	321-0306-00			RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A44R1051	321-0306-00		RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A44R1053	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R1054	315-0200-00		RES.,FXD,CMPSN:20 OHM,5%,0.25W	01121	CB2005
A44R1055	321-0163-00		RES.,FXD,FILM:487 OHM,1%,0.125W	91637	MFF1816G487R0F
A44R2012	307-0542-00		RES,NTWK,FXD,FI:10K OHM,5%,0.125W	01121	106A103
A44R2014	321-0383-00		RES.,FXD,FILM:95.3K OHM,1%,0.125W	91637	MFF1816G95301F
A44R2015	321-0337-00		RES.,FXD,FILM:31.6K OHM,1%,0.125W	91637	MFF1816G31601F
A44R2016	321-0222-00		RES.,FXD,FILM:2K OHM,1%,0.125W	91637	MFF1816G20000F
A44R2017	321-0001-00		RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R2021	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A44R2022	321-0265-00		RES.,FXD,FILM:5.62K OHM,1%,0.125W	91637	MFF1816G56200F
A44R2023	315-0391-00		RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A44R2024	321-0193-00		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A44R2025	321-0001-00		RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R2026	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A44R2027	321-0896-03		RES.,FXD,FILM:9.8K OHM,0.25%,0.125W	91637	MFF1816D98000C
A44R2028	315-0474-00		RES.,FXD,CMPSN:470K OHM,5%,0.25W	01121	CB4745
A44R2029	315-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A44R2030	321-0352-00		RES.,FXD,FILM:45.3K OHM,1%,0.125W	91637	MFF1816G45301F
A44R2031	321-1299-09		RES.,FXD,FILM:12.9K OHM,1%,0.125W	91637	MFF1816C12901F
A44R2036	325-0269-00		RES.,FXD,FILM:22K OHM,1%,0.3W	07088	K747 22 K OHM 1%
A44R2037	325-0258-00		RES.,FXD,FILM:5.62K OHM,0.25%,0.3W	07088	K747 5.62 K OHM
A44R2041	325-0323-00		RES.,FXD,FILM:10.88K OHM,0.5%,1PPM	07088	K747 10.88K OHM
A44R2042	325-0328-00		RES.,FXD,FILM:2.67K OHM,0.5%,1PPM	07088	K747 2.67K OHM
A44R2043	325-0271-00		RES.,FXD,FILM:51.1K OHM,0.25%,0.3W	07088	K747 51.1 K OHM
A44R2044	315-0274-00		RES.,FXD,CMPSN:270K OHM,5%,0.25W	01121	CB2745
A44R2051	325-0326-00		RES.,FXD,FILM:2.67K OHM,0.5%,1PPM	07088	K747 2.67K OHM
A44R2052	325-0327-00		RES.,FXD,FILM:4.72K OHM,0.5%,1PPM	07088	K747 4.72K OHM
A44R2053	321-0263-00		RES.,FXD,FILM:5.36K OHM,1%,0.125W	91637	MFF1816G53600F
A44R2054	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R3011	315-0274-00		RES.,FXD,CMPSN:270K OHM,5%,0.25W	01121	CB2745
A44R3012	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A44R3013	321-0001-00		RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R3014	321-0306-00		RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A44R3015	321-0289-00		RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A44R3026	321-0001-00		RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A44R3027	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A44R3028	315-0912-00		RES.,FXD,CMPSN:9.1K OHM,5%,0.25W	01121	CB9125
A44R3031	315-0562-00		RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A44R3032	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A44R3040	315-0154-00		RES.,FXD,CMPSN:150K OHM,5%,0.25W	01121	CB1545
A44R3041	315-0274-00		RES.,FXD,CMPSN:270K OHM,5%,0.25W	01121	CB2745
A44R3042	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A44R3046	315-0222-00		RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A44R3048	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R3049	315-0123-00		RES.,FXD,CMPSN:12K OHM,5%,0.25W	01121	CB1235
A44R3050	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A44R4012	315-0473-00		RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A44R4014	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A44R4015	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A44R4016	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A44R4037	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A44R4038	307-0103-00		RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A44R4043	307-0103-00		RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A44R4044	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A44R4051	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A44R4052	321-0233-00			RES.,FXD,FILM:2.61K OHM,1%,0.125W	91637	MFF1816G26100F
A44R4053	321-0233-00			RES.,FXD,FILM:2.61K OHM,1%,0.125W	91637	MFF1816G26100F
A44U1013	156-1160-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L12ACG
A44U1016	156-1256-00			MICROCIRCUIT,LI:MONOLITHIC QUAD ANALOG	80009	156-1256-00
A44U1018	156-1207-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR,-12V	04713	MC79L12ACG
A44U1025	156-0158-04			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A44U2018	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A44U2018	-----					
A44U2018	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A44U2018	-----					
A44U2018	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A44U2018	-----					
A44U2018	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A44U2018	-----					
A44U2032	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A44U2032	-----					
A44U2032	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A44U2032	-----					
A44U2032	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A44U2032	-----					
A44U2032	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A44U2032	-----					
A44U2043	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A44U2043	-----					
A44U2043	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A44U2043	-----					
A44U2043	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A44U2043	-----					
A44U2043	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A44U2043	-----					
A44U2052	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A44U2052	-----					
A44U2052	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A44U2052	-----					
A44U2052	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A44U2052	-----					
A44U2052	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A44U2052	-----					
A44U2052	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A44U2052	-----					
A44U2052	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A44U2052	-----					
A33U2052	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A44U3014	156-0411-02			MICROCIRCUIT,LI:QUAD COMPARATOR,SEL	04713	LM339JDS
A44U3022	156-0967-00			MICROCIRCUIT,DI:D/A CONVERTER	80009	156-0967-00
A44U4017	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A44U4022	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A44U4024	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A44U4034	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DC DR	01295	SN74LS138NP3
A44U4055	156-0105-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM301AJG4
A44VR1055	152-0526-00			SEMICONV DEVICE:ZENER,6.35V,1%,7.5MA	80009	152-0526-00
A44VR3048	152-0280-00			SEMICONV DEVICE:ZENER,0.4W,6.2V,5%	80009	152-0280-00
A44W2034	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A44W2045	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
	Part No.	Eff	Dscont			
A46	670-5547-01	B030000	B042479	CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-01
A46	670-5547-02	B042480	B042679	CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-02
A46	670-5547-03	B042680		CKT BOARD ASSY:CENTER FREQ CONTROL	80009	670-5547-03
A46C1024	283-0256-00	B031320		CAP.,FXD,CER DI:130PF,5%,100V	51642	200-100N1500131J
A46C1024	-----			(492 ONLY)		
A46C1024	283-0256-00	B031460		CAP.,FXD,CER DI:130PF,5%,100V	51642	200-100N1500131J
A46C1024	-----			(492P ONLY)		
A46C1042	283-0330-00	B031320	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C1042	-----			(492 ONLY)		
A46C1042	283-0330-00	B030000	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C1042	-----			(492P ONLY)		
A46C1043	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C1044	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A46C2031	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2032	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2033	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2034	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2035	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2036	290-0536-00			CAP.,FXD,ELCTLT:10UF,20%,25V	90201	TDC106M025FL
A46C2044	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A46C2045	283-0330-00	B030000	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C2046	285-0894-00			CAP.,FXD,PLSTC:5UF,5%,50V	56289	LP66A1A505J002
A46C3024	283-0256-00	B031320		CAP.,FXD,CER DI:130PF,5%,100V	51642	200-100N1500131J
A46C3024	-----			(492 ONLY)		
A46C3024	283-0256-00	B031460		CAP.,FXD,CER DI:130PF,5%,100V	51642	200-100N1500131J
A46C3024	-----			(492P ONLY)		
A46C3037	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A46C3038	283-0330-00	B030000	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C3039	283-0330-00	B031320	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C3039	-----			(492 ONLY)		
A46C3039	283-0330-00	B031460		CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C3039	-----			(492P ONLY)		
A46C3043	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A46C3044	283-0330-00	B030000	B042679	CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A46C3045	285-0894-00			CAP.,FXD,PLSTC:5UF,5%,50V	56289	LP66A1A505J002
A46CR1045	152-0323-00			SEMICONV DEVICE:SILICON,35V,0.1A	80009	152-0323-00
A46CR1046	152-0323-00			SEMICONV DEVICE:SILICON,35V,0.1A	80009	152-0323-00
A46CR2042	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46CR2044	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46CR2045	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46CR3042	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46CR4041	152-0323-00			SEMICONV DEVICE:SILICON,35V,0.1A	80009	152-0323-00
A46CR4042	152-0323-00			SEMICONV DEVICE:SILICON,35V,0.1A	80009	152-0323-00
A46CR4044	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46CR4045	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A46Q1039	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A46Q2042	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A46Q2043	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A46Q2044	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A46Q2046	151-1012-00			TRANSISTOR:SILICON,FE,N-CHANNEL	22229	F1585
A46Q4046	151-1012-00			TRANSISTOR:SILICON,FE,N-CHANNEL	22229	F1585
A46R1031	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A46R1032	311-1336-00			RES.,VAR,NONWIR:100K OHM,0.50W	02111	43P104T672

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A46R1038	321-0378-00	B030000	B042479	RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A46R1038	321-0385-00	B042480		RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A46R1041	321-0260-00	B030000	B042479	RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A46R1041	321-0193-00	B042480		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A46R1042	311-1238-00			RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	72-27-0
A46R1043	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R1044	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A46R1045	321-0260-00			RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A46R1046	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A46R1047	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R1048	321-0320-00	B030000	B042479	RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A46R1048	321-0362-00	B042480		RES.,FXD,FILM:57.6K OHM,1%,0.125W	91637	MFF1816G57601F
A46R2036	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R2037	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R2038	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R2039	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A46R2040	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R2041	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R2042	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R2043	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A46R2044	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A46R2045	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A46R2046	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A46R2047	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A46R3031	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A46R3032	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A46R3033	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A46R3034	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A46R3035	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A46R3036	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A46R3040	311-1238-00			RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	72-27-0
A46R3041	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A46R3042	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A46R3043	315-0475-00			RES.,FXD,CMPSN:4.7M OHM,5%,0.25W	01121	CB4755
A46R3045	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R3046	315-0750-00			RES.,FXD,CMPSN:75 OHM,5%,0.25W	01121	CB7505
A46R3047	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A46R4031	321-0290-00			RES.,FXD,FILM:10.2K OHM,1%,0.125W	91637	MFF1816G10201F
A46R4037	321-0260-00	B030000	B042479	RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A46R4037	321-0193-00	B042480		RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A46R4038	321-0356-00	B030000	B042479	RES.,FXD,FILM:49.9K OHM,1%,0.125W	91637	MFF1816G49901F
A46R4038	321-0346-00	B042480		RES.,FXD,FILM:39.2K OHM,1%,0.125W	91637	MFF1816G39201F
A46R4039	321-0320-00	B030000	B042479	RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A46R4039	321-0362-00	B042480		RES.,FXD,FILM:57.6K OHM,1%,0.125W	91637	MFF1816G57601F
A46R4040	311-1241-00			RES.,VAR,NONWIR:100K OHM,10%,0.5W	32997	3386X-T07-104
A46R4041	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A46R4042	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R4043	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A46R4044	321-0260-00			RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A46R4045	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A46R4046	315-0475-00			RES.,FXD,CMPSN:4.7M OHM,5%,0.25W	01121	CB4755
A46R4047	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A46R4048	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A46R4049	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A46U1022	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A46U1024	156-1184-00	B030000	B042479	MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014	DAC1200HCB
A46U1030	156-1184-00	B030000	B042479	MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014	DAC1200HCB
A46U1042	156-1272-00			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB
A46U1044	156-0317-00	B030000	B042679	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	34371	HA2-2625-5
A46U1044	156-1851-00	B042680		MICROCIRCUIT,LI:OPERATIONAL AMPL,SCREENED	80009	156-1851-00
A46U2014	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A46U2016	156-0916-02			MICROCIRCUIT,DI:8-2 INP 3-STATE BFR,BURN	27014	DM81LS97A
A46U2022	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A46U2024	156-0383-02			MICROCIRCUIT,DI:QUAD 2-INP NOR GATE	01295	SN74LS02
A46U2026	156-0383-02			MICROCIRCUIT,DI:QUAD 2-INP NOR GATE	01295	SN74LS02
A46U2044	156-1126-01			MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A46U2046	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A46U2046	-----					
A46U2046	156-0512-03	B041474	B042679	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A46U2046	-----					
A46U2046	156-1582-00	B042680		MICROCIRCUIT,LI:OPERATIONAL AMPL,SCREENED (492 ONLY)	06665	OP07203Z
A46U2046	-----					
A46U2046	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A46U2046	-----					
A46U2046	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A46U2046	-----					
A46U3014	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A46U3016	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A46U3022	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A46U3024	156-1184-00	B030000	B042479	MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014	DAC1200HCB
A46U3030	156-1184-00	B030000	B042479	MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014	DAC1200HCB
A46U3041	156-1272-00			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB
A46U3042	156-0317-00	B030000	B042679	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	34371	HA2-2625-5
A46U3042	156-1851-00	B042680		MICROCIRCUIT,LI:OPERATIONAL AMPL,SCREENED	80009	156-1851-00
A46U3045	156-1126-01			MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A46U3046	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492 ONLY)	04713	LM308J-8DS
A46U3046	-----					
A46U3046	156-0512-03	B041474	B042679	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492 ONLY)	04713	LM308J-8
A46U3046	-----					
A46U3046	156-1582-00	B042680		MICROCIRCUIT,LI:OPERATIONAL AMPL,SCREENED (492 ONLY)	06665	OP07203Z
A46U3046	-----					
A46U3046	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL (492P ONLY)	04713	LM308J-8DS
A46U3046	-----					
A46U3046	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER (492P ONLY)	04713	LM308J-8
A46U3046	-----					

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A46A1	670-7939-00	B042480	B042539	CKT BOARD ASSY:INTERFACE	80009 670-7939-00
A46A1	670-7939-01	B042540		CKT BOARD ASSY:INTERFACE	80009 670-7939-01
A46A1C1011	283-0330-00	B042480		CAP.,FXD,CER DI:100PF,5%,50V	51642 200-050-NP0-101J
A46A1C1014	283-0135-00	B042480		CAP.,FXD,CER DI:100PF,5%,500V	59660 831609X5F0101J
A46A1CR1016	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A1CR1017	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A1CR1018	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A1Q1018	151-0736-00	B042480		TRANSISTOR:SILICON,NPN	04713 SPS8317
A46A1R1012	321-0193-00	B042480		RES.,FXD,FILM:1K OHM,1%,0.125W	91637 MFF1816G10000F
A46A1R1014	321-0260-00	B042480		RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637 MFF1816G49900F
A46A1R1016	321-0260-00	B042480		RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637 MFF1816G49900F
A46A1R1018	315-0200-00	B042480		RES.,FXD,CMPSN:20 OHM,5%,0.25W	01121 CB2005
A46A1R1026	317-0027-00	B042540		RES.,FXD,CMPSN:2.7 OHM,5%,0.125W	01121 BB2R705
A46A1U1012	156-0854-00	B042480		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	27014 LM308AN
A46A1U1020	156-1184-01	B042480		MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014 DAC1200HCD
A46A1U1026	156-1184-02	B042480		MICROCIRCUIT,LI:12 BIT D/A CONVERTER,SELEC	27014 OBD
A46A3	670-7939-00	B042480	B042539	CKT BOARD ASSY:INTERFACE	80009 670-7939-00
A46A3	670-7939-01	B042540		CKT BOARD ASSY:INTERFACE	80009 670-7939-01
A46A3C1011	283-0330-00	B042480		CAP.,FXD,CER DI:100PF,5%,50V	51642 200-050-NP0-101J
A46A3C3014	283-0135-00	B042480		CAP.,FXD,CER DI:100PF,5%,500V	59660 831609X5F0101J
A46A3CR3016	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A3CR3017	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A3CR3018	152-0141-02	B042480		SEMICONV DEVICE:SILICON,30V,150MA	01295 1N4152R
A46A3Q3018	151-0736-00	B042480		TRANSISTOR:SILICON,NPN	04713 SPS8317
A46A3R3012	321-0193-00	B042480		RES.,FXD,FILM:1K OHM,1%,0.125W	91637 MFF1816G10000F
A46A3R3014	321-0260-00	B042480		RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637 MFF1816G49900F
A46A3R3016	321-0260-00	B042480		RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637 MFF1816G49900F
A46A3R3018	315-0200-00	B042480		RES.,FXD,CMPSN:20 OHM,5%,0.25W	01121 CB2005
A46A3R3026	317-0027-00	B042540		RES.,FXD,CMPSN:2.7 OHM,5%,0.125W	01121 BB2R705
A46A3U3012	156-0854-00	B042480		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	27014 LM308AN
A46A3U3020	156-1184-01	B042480		MICROCIRCUIT,LI:12 BIT D/A CONVERTER	27014 DAC1200HCD
A46A3U3026	156-1184-02	B042480		MICROCIRCUIT,LI:12 BIT D/A CONVERTER,SELEC	27014 OBD

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A48	670-5550-01			CKT BOARD ASSY:SPAN ATTENUATOR	80009	670-5550-01
A48C1013	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1014	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1023	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1024	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1027	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1029	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1032	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1034	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C1036	290-0535-00			CAP.,FXD,ELCTLT:33UF,20%,10V	56289	196D336X0010KA1
A48C1058	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C2024	283-0359-00			CAP.,FXD,CER DI:1000PF,10%,200V	72982	8131N203C0G0102K
A48C2026	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C2035	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C2036	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C2037	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C2042	281-0525-00			CAP.,FXD,CER DI:470PF,+/-94PF,500V	04222	7001-1364
A48C2044	281-0523-00			CAP.,FXD,CER DI:100PF,+/-20PF,500V	72982	301-000U2M0101M
A48C2050	283-0330-00	B041790		CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A48C2050	-----			(492P ONLY)		
A48C2052	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C3031	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C3032	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C4035	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C4038	290-0158-00			CAP.,FXD,ELCTLT:50UF,+75-15%,25V	56289	109D506C7025F2
A48C4056	290-0574-00			CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A48C5013	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A48C5013	-----			(492 ONLY)		
A48C5013	283-0107-00	B030000	B041789	CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A48C5013	-----			(492P ONLY)		
A48C5018	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A48C5038	290-0158-00			CAP.,FXD,ELCTLT:50UF,+75-15%,25V	56289	109D506C7025F2
A48C5048	290-0574-00			CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A48C5055	290-0722-00			CAP.,FXD,ELCTLT:100UF,20%,10V	56289	196D107X0010PE3
A48CR1049	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR1051	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR1056	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR1061	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR2051	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR2053	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR3056	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR4056	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR4062	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR4068	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48CR4069	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A48K3065	148-0079-00			RELAY,REED:200 OHM,5V	24211	GB-832A-20
A48K3075	148-0079-00			RELAY,REED:200 OHM,5V	24211	GB-832A-20
A48K4055	148-0064-00			RELAY,REED:SPST	95348	F81-1441
A48K4062	148-0064-00			RELAY,REED:SPST	95348	F81-1441
A48K4072	148-0079-00			RELAY,REED:200 OHM,5V	24211	GB-832A-20
A48L4048	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00
A48L4053	108-0417-01			COIL,RF:FIXED,110UH	80009	108-0417-01
A48L4055	108-0881-00			COIL,RF:FIXED,40.1UH	80009	108-0881-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A48Q2023	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A48Q2025	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A48Q2028	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A48Q2062	151-0390-00			TRANSISTOR:SILICON,NPN	04713	SPS3414
A48Q3056	151-0391-00			TRANSISTOR:SILICON,PNP	80009	151-0391-00
A48R1013	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1014	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1019	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1023	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1024	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1027	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1032	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1033	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A48R1034	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R1046	315-0106-00			RES.,FXD,CMPSN:10M OHM,5%,0.25W	01121	CB1065
A48R1052	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A48R1054	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A48R1056	321-0222-00			RES.,FXD,FILM:2K OHM,1%,0.125W	91637	MFF1816G20000F
A48R1058	315-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A48R1059	315-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A48R1063	311-1336-00			RES.,VAR,NONWIR:100K OHM,0.50W	02111	43P104T672
A48R1065	311-1339-00			RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	89-131-1
A48R1067	311-1339-00			RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	89-131-1
A48R1071	311-1339-00			RES.,VAR,NONWIR:5K OHM,10%,0.50W	73138	89-131-1
A48R1077	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A48R2019	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R2022	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R2035	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R2036	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R2038	321-0306-00			RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A48R2044	321-0299-00			RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A48R2046	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A48R2048	315-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A48R2049	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A48R2050	315-0431-00	B041790		RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A48R2050	----			(492P ONLY)		
A48R2051	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A48R2053	315-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A48R2066	308-0756-00			RES.,FXD,WW:100 OHM,1%,3W	91637	RS2B-B100R0F
A48R2068	321-0754-07			RES.,FXD,FILM:900 OHM,0.1%,0.125W	91637	MFF1816C900R0B
A48R2072	321-0895-07			RES.,FXD,FILM:90 OHM,0.1%,0.125W	01121	OBD
A48R2074	321-0895-07			RES.,FXD,FILM:90 OHM,0.1%,0.125W	01121	OBD
A48R2076	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A48R3022	315-0475-00			RES.,FXD,CMPSN:4.7M OHM,5%,0.25W	01121	CB4755
A48R3024	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A48R3026	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A48R3028	321-0306-00			RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A48R3029	315-0153-00			RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A48R3036	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A48R3038	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A48R3042	321-0299-00			RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A48R3044	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A48R3046	321-0299-00			RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A48R3047	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A48R3048	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A48R4032	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A48R4034	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A48R4035	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A48R4036	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R4037	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R4038	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A48R4056	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A48R4064	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A48R4065	321-0754-07			RES.,FXD,FILM:900 OHM,0.1%,0.125W	91637	MFF1816C900R0B
A48R4066	321-0895-07			RES.,FXD,FILM:90 OHM,0.1%,0.125W	01121	OB0
A48R5052	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A48R5058	322-0043-00			RES.,FXD,FILM:27.4 OHM,1%,0.25W	91637	MFF1421G27R40F
A48R5068	321-0097-00			RES.,FXD,FILM:100 OHM,1%,0.125W	91637	MFF1816G100R0F
A48U1025	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A48U1042	156-0719-00			MICROCIRCUIT,LI:10 BIT MULTIPLYING DAC	24355	AD7533LN
A48U2015	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A48U2042	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U2042	-----			(492 ONLY)		
A48U2042	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U2042	-----			(492 ONLY)		
A48U2042	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U2042	-----			(492P ONLY)		
A48U2042	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U2042	-----			(492P ONLY)		
A48U3025	156-1256-00			MICROCIRCUIT,LI:MONOLITHIC QUAD ANALOG	80009	156-1256-00
A48U3032	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U3032	-----			(492 ONLY)		
A48U3032	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U3032	-----			(492 ONLY)		
A48U3032	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U3032	-----			(492P ONLY)		
A48U3032	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U3032	-----			(492P ONLY)		
A48U3036	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U3036	-----			(492 ONLY)		
A48U3036	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U3036	-----			(492 ONLY)		
A48U3036	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A48U3036	-----			(492P ONLY)		
A48U3036	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A48U3036	-----			(492P ONLY)		
A48U4015	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A48U4025	156-0541-02			MICROCIRCUIT,DI:DUAL 2 TO 4 LINE DCDR	01295	SN74LS139NP3
A48U4042	156-0140-02			MICROCIRCUIT,DI:HEX BUFFERS W/OC HV OUT	27014	DM8017NA+/JA+
A48U5025	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A48VR1044	152-0514-00			SEMICONV DEVICE:ZENER,0.4W,10V,1%	80009	152-0514-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50	119-1069-00	B030000	B031129	PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-00
A50	-----					
A50	119-1069-01	B031130	B031279	PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-01
A50	-----					
A50	119-1069-02	B031280		PHASE LOCK ASSY:SYNTHESIZER (492 OPTION 03 ONLY)	80009	119-1069-02
A50	-----					
A50	119-1069-00	B030000	B031460	PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-00
A50	-----					
A50	119-1069-01	B031461	B041659	PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-01
A50	-----					
A50	119-1069-02	B031280		PHASE LOCK ASSY:SYNTHESIZER (492P OPTION 03 ONLY)	80009	119-1069-02
A50	-----					
A50R2045	315-0243-00	B031130		RES.,FXD,CMPSN:24K OHM,5%,0.25W (492 ONLY)	01121	CB2435
A50R2045	-----					
A50R2045	315-0243-00	B031461		RES.,FXD,CMPSN:24K OHM,5%,0.25W (492P ONLY)	01121	CB2435
A50R2045	-----					
A50A1	670-5519-00			CKT BOARD ASSY:SYNTHESIZER (OPTION 03 ONLY)	80009	670-5519-00
A50A1	-----					
A50A1C1010	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A1C1030	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A1C1040	283-0177-00			CAP.,FXD,CER DI:1UF, + 80-20%,25V	56289	2C20Z5U105Z025B
A50A1C2010	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A1C2020	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A1C2021	283-0177-00			CAP.,FXD,CER DI:1UF, + 80-20%,25V	56289	2C20Z5U105Z025B
A50A1C2040	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A1C2050	283-0177-00			CAP.,FXD,CER DI:1UF, + 80-20%,25V	56289	2C20Z5U105Z025B
A50A1C2051	290-0513-00			CAP.,FXD,ELCTL:510UF, + 75-10%,25V	56289	109D575
A50A1C3029	283-0156-00			CAP.,FXD,CER DI:1000PF, + 100-0%,200V	96733	R2670
A50A1C3030	283-0010-00			CAP.,FXD,CER DI:0.05UF, + 100-20%,50V	56289	1C10Z5U503Z050B
A50A1C3031	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A1L3029	108-0311-00			COIL,RF:FIXED,153NH	80009	108-0311-00
A50A1Q3040	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A50A1Q3041	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A50A1R1040	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A1R2040	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A1R2041	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A1R2042	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A1R2043	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A50A1R2044	315-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A50A1R3020	315-0391-00			RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A50A1R3021	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A1R3022	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A1R3023	315-0241-00			RES.,FXD,CMPSN:240 OHM,5%,0.25W	01121	CB2415
A50A1R3040	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A1R3041	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A1R3042	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A1R3043	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A1R3050	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A1R3051	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A1U1010	156-0277-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	07263	MICROA7805UC
A50A1U1020	156-0844-02			MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A1U1030	156-0844-02			MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A50A1U1040	156-0331-03			MICROCIRCUIT,DI:DUAL D TYPE POS EDGE TRIG	80009	156-0331-03
A50A1U2010	156-0844-02			MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A50A1U2020	156-0796-00			MICROCIRCUIT,DI:8 STG SHF & STORE BUS RGTR	80009	156-0796-00
A50A1U2030	156-0796-00			MICROCIRCUIT,DI:8 STG SHF & STORE BUS RGTR	80009	156-0796-00
A50A1U3030	156-0230-00			MICROCIRCUIT,DI:DUAL D MA-SLAVE FLIP-FLOP	04713	MC10131 (L OR P)
A50A2	670-5520-01	B030000	B031129	CKT BOARD ASSY:STROBE DRIVER	80009	670-5520-01
A50A2	-----			(OPTION 03 ONLY)		
A50A2	670-5520-02	B031130		CKT BOARD ASSY:STROBE DRIVER	80009	670-5520-02
A50A2	-----			(OPTION 03 ONLY)		
A50A2C1018	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A50A2C1019	281-0812-00			CAP.,FXD,CER DI:1000PF,10%,100V	72982	8035D9AADX7R102K
A50A2C1031	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A2C1032	281-0219-00	B030000	B042669	CAP.,VAR,CER DI:5-35PF,+2-2.5%,100V	59660	0513-501 A 5.035
A50A2C1032	281-0509-00	B042670		CAP.,FXD,CER DI:15PF,+/-1.5PF,500V	59660	301-000C0G0150K
A50A2C1032				(TEST SELECTED)		
A50A2C2011	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A50A2C2030	283-0331-00			CAP.,FXD,CER DI:43PF,2%,100V	59660	0805536C0G0-430G
A50A2C2033	283-0154-00			CAP.,FXD,CER DI:22PF,5%,50V	72982	8111B061C0G220J
A50A2C2092	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A50A2C2101	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A2C2102	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A2C2103	283-0059-00			CAP.,FXD,CER DI:1UF,+80-20%,50V	51642	400050Z5U105Z
A50A2C2105	281-0219-00	B030000	B042669	CAP.,VAR,CER DI:5-35PF,+2-2.5%,100V	59660	0513-501 A 5.035
A50A2C2105	281-0509-00	B042670		CAP.,FXD,CER DI:15PF,+/-1.5PF,500V	59660	301-000C0G0150K
A50A2C2105				(TEST SELECTED)		
A50A2F2064	119-1029-00			FILTER,BANDPASS:5.00674 TO 5.0188MHZ	83891	5521
A50A2L1031	108-0249-00			COIL,RF:12UH	76493	B-4992
A50A2L2089	108-0249-00			COIL,RF:12UH	76493	B-4992
A50A2Q2091	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A50A2R2024	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A2R2032	315-0430-00			RES.,FXD,CMPSN:43 OHM,5%,0.25W	01121	CB4305
A50A2R2033	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A2R2086	321-0281-00			RES.,FXD,FILM:8.25K OHM,1%,0.125W	91637	MFF1816G82500F
A50A2R2091	315-0201-00	B030000	B031129	RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A2R2091	315-0151-00	B031130		RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A50A2R2102	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A2R2103	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A50A2R2105	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A50A2U1015	156-0991-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A2U1022	156-0765-04			MICROCIRCUIT,DI:SYN UP/DN BINARY COUNTER	01295	SN74S169N3
A50A2U1091	156-0459-02			MICROCIRCUIT,DI:QUAD 2 INPUT & GATE,BURN	01295	SN74S08
A50A3	670-5522-01			CKT BOARD ASSY:OFFSET MIXER	80009	670-5522-01
A50A3	-----			(OPTION 03 ONLY)		
A50A3C1022	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A3C1030	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A50A3C1031	283-0010-00			CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A50A3C1040	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A50A3C1050	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A50A3C2012	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A50A3C2020	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A50A3C2041	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A50A3C2050	290-0513-00		CAP.,FXD,ELCTLT:510UF,+75-10%,25V	56289	109D575
A50A3CR1010	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A50A3CR1011	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A50A3CR2010	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A50A3CR2021	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A50A3L2020	108-0226-00		COIL,RF:100UH	76493	DWG B4257
A50A3Q1020	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A50A3Q1030	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A50A3Q1040	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A50A3Q2021	151-0434-00		TRANSISTOR:SILICON,PNP	04713	SS7144
A50A3R1010	321-0068-00		RES.,FXD,FILM:49.9 OHM,1%,0.125W	91637	MFF1816G49R90F
A50A3R1011	321-0068-00		RES.,FXD,FILM:49.9 OHM,1%,0.125W	91637	MFF1816G49R90F
A50A3R1020	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A3R1022	315-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A3R1023	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A3R1030	315-0202-00		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A3R1031	315-0432-00		RES.,FXD,CMPSN:4.3K OHM,5%,0.25W	01121	CB4325
A50A3R1040	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A50A3R1041	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A3R1042	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A3R1050	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A3R2010	321-0068-00		RES.,FXD,FILM:49.9 OHM,1%,0.125W	91637	MFF1816G49R90F
A50A3R2021	321-0068-00		RES.,FXD,FILM:49.9 OHM,1%,0.125W	91637	MFF1816G49R90F
A50A3R2025	315-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A3R2026	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A3R2030	315-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A3R2031	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A3R2032	315-0510-00		RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A3R2040	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A3T1010	120-1011-00		XFMR,RF:TOROID,3 WINDINGS,TRIFILAR	80009	120-1011-00
A50A3T2010	120-1011-00		XFMR,RF:TOROID,3 WINDINGS,TRIFILAR	80009	120-1011-00
A50A3T2030	120-0459-00		XFMR,TOROID:10 TURNS,BIFILAR	80009	120-0459-00
A50A3U1030	156-0991-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U2040	156-0991-00		MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A3U2050	156-0386-02		MICROCIRCUIT,DI:TRIPLE 3-INP NAND GATE	27014	DM74LS10N

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A4	670-5521-03	B030000	B031129	CKT BOARD ASSY:ERROR AMPLIFIER	80009	670-5521-03
A50A4	-----			(492 OPTION 03 ONLY)		
A50A4	670-5521-05	B031130		CKT BOARD ASSY:ERROR AMPLIFIER	80009	670-5521-05
A50A4	-----			(492 OPTION 03 ONLY)		
A50A4	670-5521-03	B030000	B031460	CKT BOARD ASSY:ERROR AMPLIFIER	80009	670-5521-03
A50A4	-----			(492P OPTION 03 ONLY)		
A50A4	670-5521-05	B031461		CKT BOARD ASSY:ERROR AMPLIFIER	80009	670-5521-05
A50A4	-----			(492P OPTION 03 ONLY)		
A50A4C1011	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C1012	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C1031	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C1032	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C1037	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C1038	283-0339-00	B031130		CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A50A4C1038	-----			(492 ONLY)		
A50A4C1038	283-0339-00	B031461		CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A50A4C1038	-----			(492P ONLY)		
A50A4C1068	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C1078	283-0177-00	B030000	B031129	CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C1078	-----			(492 ONLY)		
A50A4C1078	290-0782-00	B031130		CAP.,FXD,ELCTLT:4.7UF,+75-10%,35V	55680	ULA1V4R7TEA
A50A4C1078	-----			(492 ONLY)		
A50A4C1078	283-0177-00	B030000	B031460	CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C1078	-----			(492P ONLY)		
A50A4C1078	290-0782-00	B031461		CAP.,FXD,ELCTLT:4.7UF,+75-10%,35V	55680	ULA1V4R7TEA
A50A4C1078	-----			(492P ONLY)		
A50A4C1079	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A4C2013	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2017	283-0028-00	B031130		CAP.,FXD,CER DI:0.0022UF,20%,50V	59660	0805585Y5SO222M
A50A4C2017	-----			(492 ONLY)		
A50A4C2017	283-0028-00	B031461		CAP.,FXD,CER DI:0.0022UF,20%,50V	59660	0805585Y5SO222M
A50A4C2017	-----			(492P ONLY)		
A50A4C2019	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2021	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A4C2034	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A50A4C2035	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2048	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2049	283-0070-00			CAP.,FXD,CER DI:30PF,10%,50V	72982	8121-060C0G0300K
A50A4C2052	283-0167-00	B030000	B031129	CAP.,FXD,CER DI:0.1UF,10%,100V	72982	8131N145X5R0104K
A50A4C2052	-----			(492 ONLY)		
A50A4C2052	285-0905-00	B031130		CAP.,FXD,PLSTC:0.33UF,5%,50V	56289	LP66A1A334J002
A50A4C2052	-----			(492 ONLY)		
A50A4C2052	283-0167-00	B030000	B031460	CAP.,FXD,CER DI:0.1UF,10%,100V	72982	8131N145X5R0104K
A50A4C2052	-----			(492P ONLY)		
A50A4C2052	285-0905-00	B031461		CAP.,FXD,PLSTC:0.33UF,5%,50V	56289	LP66A1A334J002
A50A4C2052	-----			(492P ONLY)		
A50A4C2059	283-0687-00			CAP.,FXD,MICA D:560PF,2%,300V	00853	D153F561G0
A50A4C2060	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A4C2061	283-0238-00	B030000	B031129	CAP.,FXD,CER DI:0.01UF,10%,50V (492 ONLY)	72982	8121N075X7R0103K
A50A4C2061	-----					
A50A4C2061	283-0100-00	B031130		CAP.,FXD,CER DI:0.0047UF,10%,200V (492 ONLY)	56289	273C3
A50A4C2061	-----					
A50A4C2061	283-0204-00	B030000	B031460	CAP.,FXD,CER DI:0.01UF,20%,50V (492P ONLY)	96733	R2676
A50A4C2061	-----					
A50A4C2061	283-0100-00	B031461		CAP.,FXD,CER DI:0.0047UF,10%,200V (492P ONLY)	56289	273C3
A50A4C2061	-----					
A50A4C2062	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A50A4C2066	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2067	283-0177-00			CAP.,FXD,CER DI:1UF, +80-20%,25V	56289	2C20Z5U105Z025B
A50A4C2069	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A50A4C2071	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2072	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C2077	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A50A4C2078	283-0238-00	B030000	B031129	CAP.,FXD,CER DI:0.01UF,10%,50V (492 ONLY)	72982	8121N075X7R0103K
A50A4C2078	-----					
A50A4C2078	283-0100-00	B031130		CAP.,FXD,CER DI:0.0047UF,10%,200V (492 ONLY)	56289	273C3
A50A4C2078	-----					
A50A4C2078	283-0204-00	B030000	B031460	CAP.,FXD,CER DI:0.01UF,20%,50V (492P ONLY)	96733	R2676
A50A4C2078	-----					
A50A4C2078	283-0100-00	B031461		CAP.,FXD,CER DI:0.0047UF,10%,200V (492P ONLY)	56289	273C3
A50A4C2078	-----					
A50A4C2082	290-0513-00	B030000	B031129	CAP.,FXD,ELCTLT:510UF,+75-10%,25V	56289	109D575
A50A4C2082	-----					
A50A4C2082	290-0942-00	B031130		(492 ONLY) CAP.,FXD,ELCTLT:100UF,+100-10%,25V	56289	672D107H025CG2C
A50A4C2082	-----					
A50A4C2082	290-0513-00	B030000	B031460	CAP.,FXD,ELCTLT:510UF,+75-10%,25V (492P ONLY)	56289	109D575
A50A4C2082	-----					
A50A4C2082	290-0942-00	B031461		CAP.,FXD,ELCTLT:100UF,+100-10%,25V (492P ONLY)	56289	672D107H025CG2C
A50A4C2082	-----					
A50A4C3011	283-0204-00			(492P ONLY) CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A4C3044	283-0167-00	B030000	B031129	CAP.,FXD,CER DI:0.1UF,10%,100V (492 ONLY)	72982	8131N145X5R0104K
A50A4C3044	-----					
A50A4C3044	283-0239-00	B031130		CAP.,FXD,CER DI:0.022UF,10%,50V (492 ONLY)	72982	8121N083X7R0223K
A50A4C3044	-----					
A50A4C3044	283-0167-00	B030000	B031460	CAP.,FXD,CER DI:0.1UF,10%,100V (492P ONLY)	72982	8131N145X5R0104K
A50A4C3044	-----					
A50A4C3044	283-0239-00	B031461		CAP.,FXD,CER DI:0.022UF,10%,50V (492P ONLY)	72982	8121N083X7R0223K
A50A4C3044	-----					
A50A4C3047	283-0203-00	B030000	B031129	CAP.,FXD,CER DI:0.47UF,20%,50V (492 ONLY)	72982	8131M058Z5U0474M
A50A4C3047	-----					
A50A4C3047	285-0905-00	B031130		CAP.,FXD,PLSTC:0.33UF,5%,50V (492 ONLY)	56289	LP66A1A334J002
A50A4C3047	-----					
A50A4C3047	283-0203-00	B030000	B031460	CAP.,FXD,CER DI:0.47UF,20%,50V (492P ONLY)	72982	8131M058Z5U0474M
A50A4C3047	-----					
A50A4C3047	285-0905-00	B031461		CAP.,FXD,PLSTC:0.33UF,5%,50V (492P ONLY)	56289	LP66A1A334J002
A50A4C3047	-----					
A50A4C3051	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A50A4C3065	283-0115-00			CAP.,FXD,CER DI:47PF,5%,200V	59660	805-519-C0G0470J
A50A4CR2045	152-0141-02	B031130		SEMICONV DEVICE:SILICON,30V,150MA (492 ONLY)	01295	1N4152R
A50A4CR2045	-----					
A50A4CR2045	152-0141-02	B031461		SEMICONV DEVICE:SILICON,30V,150MA (492P ONLY)	01295	1N4152R
A50A4CR2045	-----					

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A4CR2046	152-0141-02	B031130		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A50A4CR2046	-----			(492 ONLY)		
A50A4CR2046	152-0141-02	B031461		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A50A4CR2046	-----			(492P ONLY)		
A50A4CR3069	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A50A4L3010	108-1112-00			COIL,RF:FIXED,170UH	80009	108-1112-00
A50A4L3060	108-1112-00			COIL,RF:FIXED,170UH	80009	108-1112-00
A50A4R1011	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A50A4R1021	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R1022	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R1023	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R1024	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A4R1031	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A50A4R1032	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A4R1034	321-0143-00	B031130		RES.,FXD,FILM:301 OHM,1%,0.125W	91637	MFF1816G301R0F
A50A4R1034	-----			(492 ONLY)		
A50A4R1034	321-0143-00	B031461		RES.,FXD,FILM:301 OHM,1%,0.125W	91637	MFF1816G301R0F
A50A4R1034	-----			(492P ONLY)		
A50A4R1035	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A4R1037	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R1038	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R1043	315-0103-00	B031130		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A4R1043	-----			(492 ONLY)		
A50A4R1043	315-0103-00	B031461		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A4R1043	-----			(492P ONLY)		
A50A4R1054	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R1061	311-1263-00			RES.,VAR,NONWIR:1K OHM,10%,0.50W	32997	3329P-L58-102
A50A4R1072	315-0510-00	B030000	B031129	RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R1072	-----			(492 ONLY)		
A50A4R1072	315-0161-00	B031130		RES.,FXD,CMPSN:160 OHM,5%,0.25W	01121	CB1615
A50A4R1072	-----			(492 ONLY)		
A50A4R1072	315-0510-00	B030000	B031460	RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R1072	-----			(492P ONLY)		
A50A4R1072	315-0161-00	B031461		RES.,FXD,CMPSN:160 OHM,5%,0.25W	01121	CB1615
A50A4R1072	-----			(492P ONLY)		
A50A4R1075	307-0114-00			RES.,FXD,CMPSN:6.2 OHM,5%,0.25W	01121	CB62G5
A50A4R2013	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R2014	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A50A4R2015	321-0243-00			RES.,FXD,FILM:3.32K OHM,1%,0.125W	91637	MFF1816G33200F
A50A4R2016	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A50A4R2017	315-0102-00	B030000	B031129	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R2017	-----			(492 ONLY)		
A50A4R2017	315-0202-00	B031130		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A4R2017	-----			(492 ONLY)		
A50A4R2017	315-0102-00	B030000	B031460	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R2017	-----			(492P ONLY)		
A50A4R2017	315-0202-00	B031461		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A4R2017	-----			(492P ONLY)		
A50A4R2018	321-0243-00			RES.,FXD,FILM:3.32K OHM,1%,0.125W	91637	MFF1816G33200F
A50A4R2028	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A4R2029	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R2031	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R2038	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A50A4R2042	321-0186-00	B031130		RES.,FXD,FILM:845 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G845R0F
A50A4R2042	-----					
A50A4R2042	321-0186-00	B031461		RES.,FXD,FILM:845 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G845R0F
A50A4R2042	-----					
A50A4R2043	321-0435-00			RES.,FXD,FILM:332K OHM,1%,0.125W	91637	MFF1816G33202F
A50A4R2044	321-0143-00	B030000	B031129	RES.,FXD,FILM:301 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G301R0F
A50A4R2044	-----					
A50A4R2044	321-0143-00	B030000	B031460	RES.,FXD,FILM:301 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G301R0F
A50A4R2044	-----					
A50A4R2045	321-0403-00	B030000	B031129	RES.,FXD,FILM:154K OHM,1%,0.125W (492 ONLY)	91637	MFF1816G15402F
A50A4R2045	-----					
A50A4R2045	315-0243-00	B031130		RES.,FXD,CMPSN:24K OHM,5%,0.25W (492 ONLY)	01121	CB2435
A50A4R2045	-----					
A50A4R2045	321-0403-00	B030000	B031460	RES.,FXD,FILM:154K OHM,1%,0.125W (492P ONLY)	91637	MFF1816G15402F
A50A4R2045	-----					
A50A4R2045	315-0243-00	B031461		RES.,FXD,CMPSN:24K OHM,5%,0.25W (492P ONLY)	01121	CB2435
A50A4R2045	-----					
A50A4R2046	321-0360-00	B030000	B031129	RES.,FXD,FILM:54.9K OHM,1%,0.125W (492 ONLY)	91637	MFF1816G54901F
A50A4R2046	-----					
A50A4R2046	315-0123-00	B031130		RES.,FXD,CMPSN:12K OHM,5%,0.25W (492 ONLY)	01121	CB1235
A50A4R2046	-----					
A50A4R2046	315-0273-00	B030000	B031460	RES.,FXD,CMPSN:27K OHM,5%,0.25W (492P ONLY)	01121	CB2735
A50A4R2046	-----					
A50A4R2046	315-0123-00	B031461		RES.,FXD,CMPSN:12K OHM,5%,0.25W (492P ONLY)	01121	CB1235
A50A4R2046	-----					
A50A4R2046	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A50A4R2048	315-0123-00	B031130		RES.,FXD,CMPSN:12K OHM,5%,0.25W (492 ONLY)	01121	CB1235
A50A4R2049	-----					
A50A4R2049	315-0123-00	B031461		RES.,FXD,CMPSN:12K OHM,5%,0.25W (492P ONLY)	01121	CB1235
A50A4R2049	-----					
A50A4R2051	321-0356-00			RES.,FXD,FILM:49.9K OHM,1%,0.125W	91637	MFF1816G49901F
A50A4R2052	321-0261-00			RES.,FXD,FILM:5.11K OHM,1%,0.125W	91637	MFF1816G51100F
A50A4R2061	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R2062	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A4R2066	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R2067	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A50A4R2083	321-0155-00			RES.,FXD,FILM:402 OHM,1%,0.125W	91637	MFF1816G402R0F
A50A4R3010	315-0620-00			RES.,FXD,CMPSN:62 OHM,5%,0.25W	01121	CB6205
A50A4R3011	307-0105-00			RES.,FXD,CMPSN:3.9 OHM,5%,0.25W	01121	CB39G5
A50A4R3046	315-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A50A4R3051	321-0179-00			RES.,FXD,FILM:715 OHM,1%,0.125W	91637	MFF1816G715R0F
A50A4R3052	321-0269-00			RES.,FXD,FILM:6.19K OHM,1%,0.125W	91637	MFF1816G61900F
A50A4R3054	321-0180-00			RES.,FXD,FILM:732 OHM,1%,0.125W	91637	MFF1816G732R0F
A50A4R3060	315-0620-00			RES.,FXD,CMPSN:62 OHM,5%,0.25W	01121	CB6205
A50A4R3068	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A50A4R3077	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A4R3078	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A50A4R3082	311-1281-00			RES.,VAR, NONWIR:2.5K OHM,10%,0.5W	32997	3329W-L58-252
A50A4R3083	321-0155-00			RES.,FXD,FILM:402 OHM,1%,0.125W	91637	MFF1816G402R0F
A50A4U1015	156-0570-00			MICROCIRCUIT,LI:DUAL HIGH SPEED COMPARATOR	27014	LM319H

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A4U1035	156-0096-00	B030000	B031129	MICROCIRCUIT,LI:VOLTAGE COMPARATOR (492 ONLY)	27014	LM311H
A50A4U1035	-----					
A50A4U1035	156-1126-01	B031130		MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL (492 ONLY)	01295	LM311JG4
A50A4U1035	-----					
A50A4U1035	156-0096-00	B030000	B031460	MICROCIRCUIT,LI:VOLTAGE COMPARATOR (492P ONLY)	27014	LM311H
A50A4U1035	-----					
A50A4U1035	156-1126-01	B031461		MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL (492P ONLY)	01295	LM311JG4
A50A4U1035	-----					
A50A4U1042	156-0991-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L05ACP
A50A4U2025	156-0796-00			MICROCIRCUIT,DI:8 STG SHF & STORE BUS RGTR	80009	156-0796-00
A50A4U2037	156-1211-00			MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A50A4U2048	156-0105-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM301AJG4
A50A4U2065	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A50A4U2075	156-0277-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	07263	MICROA7805UC
A50A4U3017	156-1160-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L12ACG
A50A4U3075	156-0132-00			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	34371	HA2-911-5
A50A4VR2065	152-0175-01			SEMICONV DEVICE:ZENER,0.4W,5.6V,5%	04713	SZG5021RL
A50A4VR3047	152-0647-00			SEMICONV DEVICE:ZENER,0.4W,6.8V,5%	04713	SZG35014K3RL
A50A4VR3048	152-0647-00			SEMICONV DEVICE:ZENER,0.4W,6.8V,5%	04713	SZG35014K3RL
A50A4W1050	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375.22 AWG	57668	JWW-0200E0
A50A4W2084	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375.22 AWG	57668	JWW-0200E0

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A50A5	670-5524-00	B030000	B031279	CKT BOARD ASSY:CONTROLLED OSC (492 OPTION 03 ONLY)	80009	670-5524-00
A50A5	-----					
A50A5	670-5524-01	B031280		CKT BOARD ASSY:CONTROLLED OSC (492 OPTION 03 ONLY)	80009	670-5524-01
A50A5	-----					
A50A5	670-5524-00	B030000	B041659	CKT BOARD ASSY:CONTROLLED OSC (492P OPTION 03 ONLY)	80009	670-5524-00
A50A5	-----					
A50A5	670-5524-01	B041660		CKT BOARD ASSY:CONTROLLED OSC (492P OPTION 03 ONLY)	80009	670-5524-01
A50A5	-----					
A50A5C1011	283-0185-00	B030000	B031279	CAP.,FXD,CER DI:2.5PF,5%,50V (492 ONLY)	72982	8101B057C0K0295B
A50A5C1011	-----					
A50A5C1011	281-0810-00	B031280		CAP.,FXD,CER DI:5.6PF,0.5%,100V (492 ONLY)	04222	GC10-1A5R6D
A50A5C1011	-----					
A50A5C1011	283-0185-00	B030000	B041659	CAP.,FXD,CER DI:2.5PF,5%,50V (492P ONLY)	72982	8101B057C0K0295B
A50A5C1011	-----					
A50A5C1011	281-0810-00	B041660		CAP.,FXD,CER DI:5.6PF,0.5%,100V (492P ONLY)	04222	GC10-1A5R6D
A50A5C1011	-----					
A50A5C1012	283-0260-00			CAP.,FXD,CER DI:5.6PF,5%,200V	51642	150 200NP0569C
A50A5C1013	281-0161-00			CAP.,VAR,CER DI:5-15PF,350V	59660	518-000A5-15
A50A5C1024	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C1025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C1030	283-0197-00	B030000	B031279	CAP.,FXD,CER DI:470PF,5%,100V (492 ONLY)	72982	8121N075C0G0471J
A50A5C1030	-----					
A50A5C1030	283-0197-00	B030000	B041659	CAP.,FXD,CER DI:470PF,5%,100V (492P ONLY)	72982	8121N075C0G0471J
A50A5C1030	-----					
A50A5C1031	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C1038	281-0622-00			CAP.,FXD,CER DI:47PF,1%,500V	59660	0301080C0G0470F
A50A5C1041	281-0165-00			CAP.,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A50A5C1042	281-0165-00			CAP.,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
A50A5C1048	281-0622-00			CAP.,FXD,CER DI:47PF,1%,500V	59660	0301080C0G0470F
A50A5C2011	281-0168-00			CAP.,VAR,AIR DI:1.3-5.4PF,250V	74970	187-0103-035
A50A5C2021	283-0346-00			CAP.,FXD,CER DI:0.47UF,+80-20%,100V	72982	8131-M100F474Z
A50A5C2022	290-0523-00	B030000	B031279	CAP.,FXD,ELCTLT:2.2UF,20%,20V (492 ONLY)	56289	196D225X0020HA1
A50A5C2022	-----					
A50A5C2022	290-0527-00	B031280		CAP.,FXD,ELCTLT:15UF,20%,20V (492 ONLY)	90201	TDC156M020FL
A50A5C2022	-----					
A50A5C2022	290-0523-00	B030000	B041659	CAP.,FXD,ELCTLT:2.2UF,20%,20V (492P ONLY)	56289	196D225X0020HA1
A50A5C2022	-----					
A50A5C2022	290-0527-00	B041660		CAP.,FXD,ELCTLT:15UF,20%,20V (492P ONLY)	90201	TDC156M020FL
A50A5C2022	-----					
A50A5C2023	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C2034	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C2041	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A50A5C2042	283-0195-00			CAP.,FXD,CER DI:680PF,5%,50V	72982	8121N075C0G0681J
A50A5C2043	283-0195-00			CAP.,FXD,CER DI:680PF,5%,50V	72982	8121N075C0G0681J
A50A5CR1011	152-0719-00			SEMICONV DEVICE:SILICON,100PF,5%,30V	80009	152-0719-00
A50A5CR1012	152-0719-00			SEMICONV DEVICE:SILICON,100PF,5%,30V	80009	152-0719-00
A50A5L1011	108-0105-00			COIL,RF:FIXED,1.59UH	80009	108-0105-00
A50A5L1025	108-0991-00			COIL,RF:FIXED,800NH	80009	108-0991-00
A50A5L1035	108-0990-00			COIL,RF:750NH	80009	108-0990-00
A50A5L2034	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A50A5L2043	108-0962-00			COIL,RF:FIXED,750NH,TOROIDAL INDUCT	80009	108-0962-00
A50A5Q1028	151-0188-00			TRANSISTOR:SILICON,PNP	04713	SPS6868K
A50A5Q2025	151-0438-00			TRANSISTOR:SILICON,PNP,SEL FROM SPS692	80009	151-0438-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A50A5Q2026	151-0438-00			TRANSISTOR:SILICON,PNP,SEL FROM SPS692	80009	151-0438-00
A50A5Q2033	151-0438-00			TRANSISTOR:SILICON,PNP,SEL FROM SPS692	80009	151-0438-00
A50A5Q2041	151-0438-00			TRANSISTOR:SILICON,PNP,SEL FROM SPS692	80009	151-0438-00
A50A5R1024	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A5R1026	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A5R1030	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A50A5R1031	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R1032	315-0390-00			RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A50A5R1033	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2020	315-0100-00	B031280		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A50A5R2020	-----			(492 ONLY)		
A50A5R2020	315-0100-00	B041660		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A50A5R2020	-----			(492P ONLY)		
A50A5R2021	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A5R2022	315-0103-00	B030000	B031279	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2022	-----			(492 ONLY)		
A50A5R2022	315-0202-00	B031280		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A5R2022	-----			(492 ONLY)		
A50A5R2022	315-0103-00	B030000	B041659	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2022	-----			(492P ONLY)		
A50A5R2022	315-0202-00	B041660		RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A50A5R2022	-----			(492P ONLY)		
A50A5R2025	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2026	321-0103-00			RES.,FXD,FILM:115 OHM,1%,0.125W	91637	MFF1816G115R0F
A50A5R2027	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A5R2031	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2032	315-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A50A5R2033	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A50A5R2034	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A50A5R2038	315-0182-00			RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825
A50A5R2041	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A50A5R2042	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A50A5R2043	315-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.25W	01121	CB2015
A50A5U2021	156-1160-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC78L12ACG
A50A5Y2012	158-0172-00			XTAL UNIT,QTZ:25.064MHZ,0.001%,SERIES	33096	0BD

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A51	670-5523-00	B030000	B031129	CKT BOARD ASSY:PHASE LOCK CONTRCL (492 OPTION 03 ONLY)	80009	670-5523-00
A51	-----					
A51	670-5523-01	B031130		CKT BOARD ASSY:PHASE LOCK CONTROL (492 OPTION 03 ONLY)	80009	670-5523-01
A51	-----					
A51	670-5523-00	B030000	B031460	CKT BOARD ASSY:PHASE LOCK CONTROL (492P OPTION 03 ONLY)	80009	670-5523-00
A51	-----					
A51	670-5523-01	B031461		CKT BOARD ASSY:PHASE LOCK CONTROL (492P OPTION 03 ONLY)	80009	670-5523-01
A51	-----					
A51C1015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C1040	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A51C1090	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A51C3014	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C5010	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C5090	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C6022	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C6050	283-0032-00			CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A51C6092	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C7010	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A51C7030	283-0221-00	B031130		CAP.,FXD,CER DI:0.47UF,20%,50V (492 ONLY)	72982	8131N087X7R0474M
A51C7030	-----					
A51C7030	283-0221-00	B031461		CAP.,FXD,CER DI:0.47UF,20%,50V (492P ONLY)	72982	8131N087X7R0474M
A51C7030	-----					
A51C7032	290-0183-00			CAP.,FXD,ELCTLT:1UF,10%,35V	90201	TAC105K035P02
A51C7090	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A51CR6060	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A51CR7026	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A51CR7027	152-0141-02	B030000	B031129	SEMICONV DEVICE:SILICON,30V,150MA (492 ONLY)	01295	1N4152R
A51CR7027	-----					
A51CR7027	152-0141-02	B030000	B031460	SEMICONV DEVICE:SILICON,30V,150MA (492P ONLY)	01295	1N4152R
A51CR7027	-----					
A51CR7030	152-0141-02	B031130		SEMICONV DEVICE:SILICON,30V,150MA (492 ONLY)	01295	1N4152R
A51CR7030	-----					
A51CR7030	152-0141-02	B031461		SEMICONV DEVICE:SILICON,30V,150MA (492P ONLY)	01295	1N4152R
A51CR7030	-----					
A51Q3016	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51Q4090	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51Q7030	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51Q7060	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51Q7070	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51Q7080	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A51R1019	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A51R1028	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A51R1090	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R2014	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A51R2019	315-0273-00			RES.,FXD,CMPSN:27K OHM,5%,0.25W	01121	CB2735
A51R2020	315-0511-00			RES.,FXD,CMPSN:510 OHM,5%,0.25W	01121	CB5115
A51R3011	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A51R3013	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A51R4090	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R4091	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A51R5021	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A51R5022	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A51R5056	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715

=

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A51R6020	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6032	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A51R6034	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6036	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6050	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6051	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6052	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R6053	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R6055	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R6058	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7028	315-0393-00	B030000	B031129	RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A51R7028	-----			(492 ONLY)		
A51R7028	315-0183-00	B031130		RES.,FXD,CMPSN:18K OHM,5%,0.25W	01121	CB1835
A51R7028	-----			(492 ONLY)		
A51R7028	315-0393-00	B030000	B031460	RES.,FXD,CMPSN:39K OHM,5%,0.25W	01121	CB3935
A51R7028	-----			(492P ONLY)		
A51R7028	315-0183-00	B031461		RES.,FXD,CMPSN:18K OHM,5%,0.25W	01121	CB1835
A51R7028	-----			(492P ONLY)		
A51R7032	315-0103-00	B030000	B031129	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7032	-----			(492 ONLY)		
A51R7032	315-0333-00	B031130		RES.,FXD,CMPSN:33K OHM,5%,0.25W	01121	CB3335
A51R7032	-----			(492 ONLY)		
A51R7032	315-0103-00	B030000	B031460	RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7032	-----			(492P ONLY)		
A51R7032	315-0333-00	B031461		RES.,FXD,CMPSN:33K OHM,5%,0.25W	01121	CB3335
A51R7032	-----			(492P ONLY)		
A51R7052	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7060	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7070	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A51R7071	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A51R7072	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R7073	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A51R7080	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A51R7081	315-0513-00			RES.,FXD,CMPSN:51K OHM,5%,0.25W	01121	CB5135
A51R7082	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R7088	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A51R7090	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A51R7091	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A51R7092	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A51U2025	156-0331-02			MICROCIRCUIT,DI:DUAL D EDGE TRIGGERED FLIP	80009	156-0331-02
A51U2036	156-0914-02			MICROCIRCUIT,DI:OCT ST BFR W/3 STATE OUT	01295	SN74LS240
A51U2055	156-0579-02			MICROCIRCUIT,DI:DUAL 4 BIT BIN COUNTER,SEL	80009	156-0579-02
A51U2065	156-1044-00			MICROCIRCUIT,DI:4 BIT SYNC BIN CNTR W/CLR	07263	F93S16DC
A51U2078	156-0799-01			MICROCIRCUIT,DI:DECADE CNTR/DIVIDER,SCRN	04713	MC14017BCLD
A51U2091	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR,BURN IN	01295	SN74LS393
A51U2105	156-0798-02			MICROCIRCUIT,DI:DUAL 14 TO 1 LINE SEL/MUX	01295	SN74LS153
A51U4014	156-0413-02			MICROCIRCUIT,DI:QUAD 2-INP SCHMITT TRIG	80009	156-0413-02
A51U4025	156-0914-02			MICROCIRCUIT,DI:OCT ST BFR W/3 STATE OUT	01295	SN74LS240
A51U4049	156-0914-02			MICROCIRCUIT,DI:OCT ST BFR W/3 STATE OUT	01295	SN74LS240
A51U4062	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR,BURN IN	01295	SN74LS393
A51U4074	156-0729-00			MICROCIRCUIT,DI:3 STATE INVERTING HEX BFR	27014	DM80L98N
A51U4105	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR,BURN IN	01295	SN74LS393
A51U4105	156-1172-01			MICROCIRCUIT,DI:DUAL 4 BIT CNTR,BURN IN	01295	SN74LS393
A51U6015	156-0383-02			MICROCIRCUIT,DI:QUAD 2-INP NOR GATE	01295	SN74LS02

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A51U6028	156-1152-01		MICROCIRCUIT,DI:PRCN RETRIGGERABLE,BURN-IN	80009	156-1152-01
A51U6066	156-0366-02		MICROCIRCUIT,DI:DUAL D FLIP-FLOP,CHK	80009	156-0366-02
A51U6078	156-0645-02		MICROCIRCUIT,DI:HEX INV ST NAND GATES,SCRN	01295	SN74LS14
A51U6105	156-0798-02		MICROCIRCUIT,DI:DUAL 14 TO 1 LINE SEL/MUX	01295	SN74LS153
A51U7041	156-0914-02		MICROCIRCUIT,DI:OCT ST BFR W/3 STATE OUT	01295	SN74LS240
A51U7055	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A51W5020	131-0566-00		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A54	670-5546-01	B030000	B042799	CKT BOARD ASSY:MEMORY	80009	670-5546-01
A54	670-6946-03	B042800		CKT BOARD ASSY:MEMORY	80009	670-6946-03
A54	670-5546-02	B030000	B042799	CKT BOARD ASSY:MEMORY	80009	670-5546-02
A54	-----			(492P ONLY)		
A54	670-6946-04	B042800		CKT BOARD ASSY:MEMORY	80009	670-6946-04
A54	-----			(492P ONLY)		
A54C1011	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C1031	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C1038	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C1039	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C2011	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C2029	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54C2038	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A54R1037	307-0446-00			RES.NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A54S1033	260-1721-00			SWITCH,ROCKER:8,SPST,125MA,30VDC	00779	435166-5
A54U1012	160-0886-04	B030000	B042799	MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0886-04
A54U1012	160-0886-05	B042800		MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0886-05
A54U1017	160-0317-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0317-01
A54U1017	-----			(492P ONLY)		
A54U1023	160-0318-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0318-01
A54U1023	-----			(VERSION 8.7)		
A54U1023	160-0888-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0888-02
A54U1023	-----			(492P ONLY)		
A54U1028	160-0319-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0319-02
A54U1028	-----			(VERSION 8.7)		
A54U1028	160-0887-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0887-02
A54U1028	-----			(492P ONLY)		
A54U1033	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A54U1036	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A54U1038	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A54U2012	160-0320-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0320-01
A54U2012	-----			(492P ONLY)		
A54U2023	160-0838-00			MICROCIRCUIT,DI:8192 X 8 ROM,PRGM	80009	160-0838-00
A54U2028	160-0839-00			MICROCIRCUIT,DI:8192 X 8 ROM,PRGM	80009	160-0839-00
A54U2032	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01
A54U2033	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A54U2035	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A56 A56	670-5543-01 -----			CKT BOARD ASSY: GPIB (492P ONLY)	80009	670-5543-01
A56C1011	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C1021	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C1028	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2038	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2039	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2041	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2045	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2047	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C2051	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3012	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3025	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3030	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3031	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3040	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3044	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3046	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3048	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A56C3049	290-0535-00			CAP.,FXD,ELCTLT:33UF,20%,10V	56289	196D336X0010KA1
A56L3053	108-0598-00			COIL,RF:200UH	80009	108-0598-00
A56R2041	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R2042	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R2043	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R2044	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R3041	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R3042	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R3043	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R3044	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%,0.25W	01121	CB4315
A56R3049	307-0446-00			RES.NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A56U1011	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A56U1021	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A56U1028	156-0541-02			MICROCIRCUIT,DI:DUAL 2 TO 4 LINE DCDR	01295	SN74LS139NP3
A56U1032	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01
A56U1037	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01
A56U1042	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01
A56U1046	156-1127-01			MICROCIRCUIT,DI:1024 X 4 STATIC RAM	80009	156-1127-01
A56U2012	160-0952-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0952-01
A56U2019	160-0948-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0948-01
A56U2025	160-0951-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0951-00
A56U2031	160-0949-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0949-01
A56U2047	156-1444-00	B030000	B041879	MICROCIRCUIT,DI: GPIB ADAPTER	01295	TMS9914 (N OR J)
A56U2047	156-1444-01	B041880		MICROCIRCUIT,DI:NMOS,GPIB ADAPTER	01295	TMS9914NL
A56U3012	160-0950-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0950-02
A56U3019	160-0969-01			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0969-01
A56U3025	160-0947-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0947-02
A56U3031	160-0953-02			MICROCIRCUIT,DI:2048 X 8 EPROM,PRGM	80009	160-0953-02
A56U3039	156-0914-02			MICROCIRCUIT,DI:OCT ST BFR W/3 STATE OUT	01295	SN74LS240
A56A1 A56A1	670-7060-00 -----			CKT BOARD ASSY: GPIB EXTENDER (492P ONLY, CONTAINS NO ELEC PARTS)	80009	670-7060-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A58	670-5542-00	B030000	B031419	CKT BOARD ASSY:PROCESSOR	80009	670-5542-00
A58	670-5542-01	B031420		CKT BOARD ASSY:PROCESSOR	80009	670-5542-01
A58	670-5542-00	B030000	B031659	CKT BOARD ASSY:PROCESSOR	80009	670-5542-00
A58	-----			(492P ONLY)		
A58	670-5542-01	B031660		CKT BOARD ASSY:PROCESSOR	80009	670-5542-01
A58	-----			(492P ONLY)		
A58C1013	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C1023	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C1024	283-0334-00			CAP.,FXD,CER DI:130PF,+1-2%,500V	72982	8121N501C0G0131G
A58C1026	283-0334-00			CAP.,FXD,CER DI:130PF,+1-2%,500V	72982	8121N501C0G0131G
A58C1033	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C2042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C2046	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C3015	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C3032	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C3042	290-0512-00			CAP.,FXD,ELCTLT:22UF,20%,15V	56289	196D226X0015KA1
A58C4034	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A58C4038	283-0641-00	B030000	B031419	CAP.,FXD,MICA D:180PF,1%,100V	00853	DD155F181F0
A58C4038	-----			(492 ONLY)		
A58C4038	283-0625-00	B031420		CAP.,FXD,MICA D:220PF,1%,500V	00853	D105F221F0
A58C4038	-----			(492 ONLY)		
A58C4038	283-0641-00	B030000	B031659	CAP.,FXD,MICA D:180PF,1%,100V	00853	DD155F181F0
A58C4038	-----			(492P ONLY)		
A58C4038	283-0625-00	B031660		CAP.,FXD,MICA D:220PF,1%,500V	00853	D105F221F0
A58C4038	-----			(492P ONLY)		
A58CR2024	152-0322-00			SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A58CR2025	152-0322-00			SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A58DS1032	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58DS1034	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58DS1036	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58DS1038	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58DS1042	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58DS1044	150-1068-00			LT EMITTING DIO:RED	50434	HLMP-6320
A58L3046	108-0598-00			COIL,RF:200UH	80009	108-0598-00
A58L4044	108-0249-00			COIL,RF:12UH	76493	B-4992
A58R1020	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A58R1021	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A58R1022	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A58R1023	321-0277-00			RES.,FXD,FILM:7.5K OHM,1%,0.125W	91637	MFF1816G75000F
A58R1024	321-0277-00			RES.,FXD,FILM:7.5K OHM,1%,0.125W	91637	MFF1816G75000F
A58R1026	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A58R1027	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A58R1034	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A58R1036	307-0594-00			RES NTWK,FXD FI:7.220 OHM,2%,1.0W	91637	CSP08G01221G
A58R2027	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A58R2032	131-0566-00			BUS CONDUCTOR:DUMMY RES,2.375,22 AWG	57668	JWW-0200E0
A58R3015	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A58R3034	307-0103-00	B030000	B031419	RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A58R3034	-----			(492 ONLY)		
A58R3034	307-0103-00	B030000	B041659	RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5
A58R3034	-----			(492P ONLY)		
A58R3043	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A58R3046	307-0103-00			RES.,FXD,CMPSN:2.7 OHM,5%,0.25W	01121	CB27G5

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A58R4042	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A58R4043	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A58U1013	156-1111-02			MICROCIRCUIT,DI:OCTAL BUS TRANSCEIVERS	01295	SN74LS245JP3
A58U1031	156-0724-02			MICROCIRCUIT,DI:HEX INV W/OC OUT,BURN-IN	01295	SN74LS05
A58U1037	156-0541-02			MICROCIRCUIT,DI:DUAL 2 TO 4 LINE DCDR	01295	SN74LS139NP3
A58U2014	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A58U2035	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A58U2044	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A58U3016	156-1111-02			MICROCIRCUIT,DI:OCTAL BUS TRANSCEIVERS	01295	SN74LS245JP3
A58U3022	156-0427-03			MICROCIRCUIT,DI:PERIPHERAL INTERFACE	80009	156-0427-03
A58U3027	156-0426-00			MICROCIRCUIT,DI:MICROPROCESSOR	04713	MC6800S
A58U3036	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A58U3043	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A58U4035	156-1086-00			MICROCIRCUIT,DI:2 PHASE CLOCK GEN/DRIVER	04713	MC6875P
A58W3034	131-0566-00	B031420		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG (492 ONLY)	57668	JWW-0200E0
A58W3034	-----					
A58W3034	131-0566-00	B041660		BUS CONDUCTOR:DUMMY RES,2.375,22 AWG (492P ONLY)	57668	JWW-0200E0
A58W3034	-----					
A58Y3037	158-0088-00			XTAL UNIT,QTZ:3.4133MHZ,0.01%,PARALLEL	33096	PB-1309

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A60	670-5555-00	B030000	B041894	CKT BOARD ASSY: DIGITAL STORAGE INTFC	80009	670-5555-00
A60	-----			(OPTION 02 ONLY)		
A60	670-5555-01	B041895	B043114	CKT BOARD ASSY: DIGITAL STORAGE INTFC	80009	670-5555-01
A60	-----			(OPTION 02 ONLY)		
A60	670-5555-02	B043115		CKT BOARD ASSY: DIGITAL STORAGE HORIZ	80009	670-5555-02
A60	-----			(OPTION 02 ONLY)		
A60C1038	283-0346-00			CAP., FXD, CER DI: 0.47UF, +80-20%, 100V	72982	8131-M100F474Z
A60C1041	283-0359-01	B043115		CAP., FXD, CER DI: 1000PF, 5%, 200V	05397	C330C102J2G5CA
A60C1045	283-0346-00			CAP., FXD, CER DI: 0.47UF, +80-20%, 100V	72982	8131-M100F474Z
A60C1048	283-0346-00	B043115		CAP., FXD, CER DI: 0.47UF, +80-20%, 100V	72982	8131-M100F474Z
A60C2019	281-0814-00	B041895		CAP., FXD, CER DI: 100PF, 10%, 100V	04222	GC70-1-A101K
A60C2022	283-0330-00	B043115		CAP., FXD, CER DI: 100PF, 5%, 50V	51642	200-050-NP0-101J
A60C2041	283-0346-00	B043115		CAP., FXD, CER DI: 0.47UF, +80-20%, 100V	72982	8131-M100F474Z
A60C2042	283-0065-00	B043115		CAP., FXD, CER DI: 0.001UF, 5%, 100V	59660	0835-591Y5E0102J
A60C2043	283-0065-00	B030000	B043114	CAP., FXD, CER DI: 0.001UF, 5%, 100V	59660	0835-591Y5E0102J
A60C2043	290-0527-00	B043115		CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C2044	283-0065-00	B043115		CAP., FXD, CER DI: 0.001UF, 5%, 100V	59660	0835-591Y5E0102J
A60C2045	283-0065-00	B030000	B043114	CAP., FXD, CER DI: 0.001UF, 5%, 100V	59660	0835-591Y5E0102J
A60C2045	290-0527-00	B043115		CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C2046	290-0527-00	B043115		CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C2047	290-0527-00	B043115		CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C3032	290-0527-00			CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C3036	290-0527-00			CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C3038	290-0527-00			CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60C3048	290-0527-00			CAP., FXD, ELCTLT: 15UF, 20%, 20V	90201	TDC156M020FL
A60L2039	108-0598-00	B043115		COIL, RF: 200UH	80009	108-0598-00
A60L2041	108-0598-00	B043115		COIL, RF: 200UH	80009	108-0598-00
A60L2043	108-0598-00	B043115		COIL, RF: 200UH	80009	108-0598-00
A60L2046	108-0598-00	B043115		COIL, RF: 200UH	80009	108-0598-00
A60L3032	108-0598-00			COIL, RF: 200UH	80009	108-0598-00
A60L3034	108-0598-00			COIL, RF: 200UH	80009	108-0598-00
A60L3036	108-0598-00			COIL, RF: 200UH	80009	108-0598-00
A60L3048	108-0598-00			COIL, RF: 200UH	80009	108-0598-00
A60R1034	321-0188-00			RES., FXD, FILM: 887 OHM, 1%, 0.125W	91637	MFF1816G887R0F
A60R1035	321-0188-00			RES., FXD, FILM: 887 OHM, 1%, 0.125W	91637	MFF1816G887R0F
A60R1036	321-0277-00			RES., FXD, FILM: 7.5K OHM, 1%, 0.125W	91637	MFF1816G75000F
A60R1037	321-0199-00			RES., FXD, FILM: 1.15K OHM, 1%, 0.125W	91637	MFF1816G11500F
A60R1038	321-0402-00			RES., FXD, FILM: 150K OHM, 1%, 0.125W	24546	NA55D1503F
A60R1039	315-0102-00	B030000	B043114	RES., FXD, CMPSN: 1K OHM, 5%, 0.25W	01121	CB1025
A60R1039	311-1915-00	B043115		RES., VAR, NONWIR: 20K OHM, 10%, 0.50W	73138	72-196-0
A60R1040	311-1921-00	B030000	B043114	RES., VAR, NONWIR: 250 OHM, 10%, 0.50W	73138	72-191-0
A60R1040	315-0273-00	B043115		RES., FXD, CMPSN: 27K OHM, 5%, 0.25W	01121	CB2735
A60R1041	311-1921-00	B043115		RES., VAR, NONWIR: 250 OHM, 10%, 0.50W	73138	72-191-0
A60R1042	321-0188-00	B043115		RES., FXD, FILM: 887 OHM, 1%, 0.125W	91637	MFF1816G887R0F
A60R1043	321-0188-00	B043115		RES., FXD, FILM: 887 OHM, 1%, 0.125W	91637	MFF1816G887R0F
A60R1044	315-0152-00	B030000	B043114	RES., FXD, CMPSN: 1.5K OHM, 5%, 0.25W	01121	CB1525
A60R1044	321-0402-00	B043115		RES., FXD, FILM: 150K OHM, 1%, 0.125W	24546	NA55D1503F
A60R1045	311-1921-00	B030000	B043114	RES., VAR, NONWIR: 250 OHM, 10%, 0.50W	73138	72-191-0
A60R1045	315-0102-00	B043115		RES., FXD, CMPSN: 1K OHM, 5%, 0.25W	01121	CB1025
A60R1046	311-1915-00	B043115		RES., VAR, NONWIR: 20K OHM, 10%, 0.50W	73138	72-196-0
A60R1047	315-0152-00	B043115		RES., FXD, CMPSN: 1.5K OHM, 5%, 0.25W	01121	CB1525
A60R1048	311-1921-00	B043115		RES., VAR, NONWIR: 250 OHM, 10%, 0.50W	73138	72-191-0
A60R1049	315-0102-00	B043115		RES., FXD, CMPSN: 1K OHM, 5%, 0.25W	01121	CB1025

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A60R2015	307-0466-00	B043115		RES.,THERMAL:470 OHM,20%.0.5W		
A60R2019	317-0102-00	B041895		RES.,FXD,CMPSN:1K OHM,5%.0.125W	01121	BB1025
A60R2022	317-0102-00	B043115		RES.,FXD,CMPSN:1K OHM,5%.0.125W	01121	BB1025
A60R2025	315-0152-00	B043115		RES.,FXD,CMPSN:1.5K OHM,5%.0.25W	01121	CB1525
A60R2027	315-0203-00	B043115		RES.,FXD,CMPSN:20K OHM,5%.0.25W	01121	CB2035
A60R2033	307-0466-00	B043115		RES.,THERMAL:470 OHM,20%.0.5W		
A60R2035	315-0272-00	B043115		RES.,FXD,CMPSN:2.7K OHM,5%.0.25W	01121	CB2725
A60R2036	321-0385-00			RES.,FXD,FILM:100K OHM,1%.0.125W	91637	MFF1816G10002F
A60R2040	321-0199-00	B043115		RES.,FXD,FILM:1.15K OHM,1%.0.125W	91637	MFF1816G11500F
A60R2041	321-0385-00	B030000	B043114	RES.,FXD,FILM:100K OHM,1%.0.125W	91637	MFF1816G10002F
A60R2041	321-0277-00	B043115		RES.,FXD,FILM:7.5K OHM,1%.0.125W	91637	MFF1816G75000F
A60R2042	315-0102-00	B030000	B043114	RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A60R2042	321-0412-00	B043115		RES.,FXD,FILM:191K OHM,1%.0.125W	91637	MFF1816G19102F
A60R2043	321-0277-00	B030000	B043114	RES.,FXD,FILM:7.5K OHM,1%.0.125W	91637	MFF1816G75000F
A60R2043	321-0277-00	B043115		RES.,FXD,FILM:7.5K OHM,1%.0.125W	91637	MFF1816G75000F
A60R2044	321-0232-00	B030000	B043114	RES.,FXD,FILM:2.55K OHM,1%.0.125W	91637	MFF1816G25500F
A60R2044	321-0277-00	B043115		RES.,FXD,FILM:7.5K OHM,1%.0.125W	91637	MFF1816G75000F
A60R2045	315-0102-00	B030000	B043114	RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A60R2045	321-0232-00	B043115		RES.,FXD,FILM:2.55K OHM,1%.0.125W	91637	MFF1816G25500F
A60R2046	321-0277-00	B030000	B043114	RES.,FXD,FILM:7.5K OHM,1%.0.125W	91637	MFF1816G75000F
A60R2046	321-0232-00	B043115		RES.,FXD,FILM:2.55K OHM,1%.0.125W	91637	MFF1816G25500F
A60R2047	321-0232-00	B030000	B043114	RES.,FXD,FILM:2.55K OHM,1%.0.125W	91637	MFF1816G25500F
A60R2047	315-0102-00	B043115		RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A60R2048	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%.0.25W	01121	CB1035
A60R2049	321-0412-00			RES.,FXD,FILM:191K OHM,1%.0.125W	91637	MFF1816G19102F
A60R3012	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%.(9) RES	91637	MSP10A01-103M
A60R3024	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%.0.25W	01121	CB1525
A60R3026	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%.(9) RES	91637	MSP10A01-103M
A60R3041	311-1915-00			RES.,VAR,NONWIR:20K OHM,10%.0.50W	73138	72-196-0
A60U1012	156-0480-02			MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A60U1014	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A60U1015	156-0480-02	B043115		MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A60U1016	156-0852-02	B030000	B043114	MICROCIRCUIT,DI:HEX DRVR W/3 STATE INP	01295	SN74LS367NP3
A60U1016	156-0852-02	B043115		MICROCIRCUIT,DI:HEX DRVR W/3 STATE INP	01295	SN74LS367NP3
A60U1018	156-0391-02			MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A60U1022	156-0852-02	B030000	B043114	MICROCIRCUIT,DI:HEX DRVR W/3 STATE INP	01295	SN74LS367NP3
A60U1022	156-0391-02	B043115		MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A60U1023	156-0852-02	B043115		MICROCIRCUIT,DI:HEX DRVR W/3 STATE INP	01295	SN74LS367NP3
A60U1024	156-0391-02	B030000	B043114	MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A60U1024	156-0388-03	B043115		MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A60U1026	156-0987-00	B030000	B043114	MICROCIRCUIT,DI:4096 X 1 STATIC R/W RAM	80009	156-0987-00
A60U1026	156-0987-00	B043115		MICROCIRCUIT,DI:4096 X 1 STATIC R/W RAM	80009	156-0987-00
A60U1027	156-0391-02	B043115		MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A60U1032	156-0465-02			MICROCIRCUIT,DI:8 INP NAND GATE	01295	SN74LS30NP3
A60U1033	156-0172-02	B043115		MICROCIRCUIT,DI:DUAL RETRIG MONOSTABLE MV	01295	SN74123
A60U1034	156-1320-00			MICROCIRCUIT,DI:8 INP OR NOR GATE	80009	156-1320-00
A60U1035	156-0465-02	B043115		MICROCIRCUIT,DI:8 INP NAND GATE	01295	SN74LS30NP3
A60U1041	156-1320-02	B043115		MICROCIRCUIT,LI:DIGITAL/ANALOG CONVERTER	04713	MC3410CLD
A60U1042	156-0927-02	B043115		MICROCIRCUIT,LI:DIGITAL/ANALOG CONVERTER	04713	MC3410CLD
A60U1045	156-1226-00	B043115		MICROCIRCUIT,LI:DUAL COMPARATOR,14 DIP	34335	AM319D
A60U2012	156-0844-02			MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2014	156-0385-02	B030000	B043114	MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A60U2014	156-0844-02	B043115		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2015	156-0385-02	B043115		MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A60U2016	156-0844-02	B030000	B043114	MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2016	156-0844-02	B043115		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2017	156-0480-02	B043115		MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A60U2018	156-0480-02			MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A60U2022	156-0844-02			MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2023	156-0844-02	B043115		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2024	156-0844-02	B030000	B043114	MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2024	156-0844-02	B043115		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A60U2025	156-0382-02	B043115		MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A60U2026	156-0987-00	B030000	B043114	MICROCIRCUIT,DI:4096 X 1 STATIC R/W RAM	80009	156-0987-00
A60U2026	156-0987-00	B043115		MICROCIRCUIT,DI:4096 X 1 STATIC R/W RAM	80009	156-0987-00
A60U2027	156-1220-01	B043115		MICROCIRCUIT,DI:HEX BUS DRIVER,SCRN		
A60U2032	155-0158-00			MICROCIRCUIT,DI:DIGITAL STORAGE HORIZONTAL	80009	155-0158-00
A60U2034	156-0927-02			MICROCIRCUIT,LI:DIGITAL/ANALOG CONVERTER	04713	MC3410CLD
A60U2035	155-0158-00	B043115		MICROCIRCUIT,DI:DIGITAL STORAGE HORIZONTAL	80009	155-0158-00
A60U2036	156-0927-02			MICROCIRCUIT,LI:DIGITAL/ANALOG CONVERTER	04713	MC3410CLD
A60U2038	156-1226-00			MICROCIRCUIT,LI:DUAL COMPARATOR,14 DIP	34335	AM319D
A60U2042	156-1126-01	B030000	B043114	MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A60U2042	156-0927-02	B043115		MICROCIRCUIT,LI:DIGITAL/ANALOG CONVERTER	04713	MC3410CLD
A60U2044	156-1272-00			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB
A60U2046	156-1126-01	B043115		MICROCIRCUIT,LI:VOLTAGE COMPARATOR,SEL	01295	LM311JG4
A60U2047	156-1272-00	B043115		MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	18324	NE5532 FE-IIB

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A61	670-5554-00	B030000	B042219	CKT BOARD ASSY:DIGITAL STORAGE (OPTION 02 ONLY)	80009	670-5554-00
A61	-----					
A61	670-5554-01	B042220	B043114	CKT BOARD ASSY:DIGITAL STORAGE (OPTION 02 ONLY)	80009	670-5554-01
A61	-----					
A61	670-5554-03	B043115		CKT BOARD ASSY:DIGITAL STORAGE (OPTION 02 ONLY)	80009	670-5554-01
A61	-----					
A61C1031	285-1062-00			CAP.,FXD,PLSTC:0.005UF,0.1%,200V	19396	502F02PP460
A61C1032	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A61C1037	283-0622-00			CAP.,FXD,MICA D:450PF,1%,300V	00853	D155F451F0
A61C1038	283-0622-00			CAP.,FXD,MICA D:450PF,1%,300V	00853	D155F451F0
A61C1039	283-0221-00	B043115		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131N087X7R0474M
A61C2020	283-0139-00	B043115		CAP.,FXD,CER DI:150PF,20%,50V	51642	W100-050-X5F151M
A61C2031	283-0346-00			CAP.,FXD,CER DI:0.47UF,+80-20%,100V	72982	8131-M100F474Z
A61C2032	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A61C2033	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A61C2034	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A61C2035	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A61C2036	290-0527-00			CAP.,FXD,ELCTLT:15UF,20%,20V	90201	TDC156M020FL
A61C2037	283-0346-00			CAP.,FXD,CER DI:0.47UF,+80-20%,100V	72982	8131-M100F474Z
A61L2032	108-0598-00	B030000	B043114	COIL,RF:200UH	80009	108-0598-00
A61L2032	108-0537-00	B043115		COIL,RF:200UH	80009	108-0537-00
A61L2033	108-0598-00	B030000	B043114	COIL,RF:200UH	80009	108-0598-00
A61L2033	108-0537-00	B043115		COIL,RF:200UH	80009	108-0537-00
A61L2034	108-0598-00	B030000	B043114	COIL,RF:200UH	80009	108-0598-00
A61L2034	108-0537-00	B043115		COIL,RF:200UH	80009	108-0537-00
A61L2035	108-0598-00	B030000	B043114	COIL,RF:200UH	80009	108-0598-00
A61L2035	108-0537-00	B043115		COIL,RF:200UH	80009	108-0537-00
A61Q2035	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A61R1011	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A61R1015	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A61R1024	311-1236-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	72-22-0
A61R1026	321-0395-00			RES.,FXD,FILM:127K OHM,1%,0.125W	91637	MFF1816G12702F
A61R1029	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A61R1030	311-1198-00			RES.,VAR,NONWIR:20K OHM,20%,0.5W	73138	72-29-0
A61R1031	321-0188-00			RES.,FXD,FILM:887 OHM,1%,0.125W	91637	MFF1816G887R0F
A61R1032	321-0218-00			RES.,FXD,FILM:1.82K OHM,1%,0.125W	91637	MFF1816G18200F
A61R1033	321-0360-00			RES.,FXD,FILM:54.9K OHM,1%,0.125W	91637	MFF1816G54901F
A61R1034	311-1236-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	72-22-0
A61R1035	321-0267-00			RES.,FXD,FILM:5.9K OHM,1%,0.125W	91637	MFF1816G59000F
A61R1036	311-1198-00			RES.,VAR,NONWIR:20K OHM,20%,0.5W	73138	72-29-0
A61R1037	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A61R1038	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A61R1039	321-0395-00			RES.,FXD,FILM:127K OHM,1%,0.125W	91637	MFF1816G12702F
A61R2016	307-0446-00			RES,NTWK,FXD FI:10K OHM,20%,(9) RES	91637	MSP10A01-103M
A61R2020	321-0260-00	B043115		RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A61R2025	317-0153-00			RES.,FXD,CMPSN:15K OHM,5%,0.125W	01121	BB1535
A61R2031	321-0188-00			RES.,FXD,FILM:887 OHM,1%,0.125W	91637	MFF1816G887R0F
A61R2032	321-0201-00			RES.,FXD,FILM:1.21K OHM,1%,0.125W	91637	MFF1816G12100F
A61R2033	321-0364-00			RES.,FXD,FILM:60.4K OHM,1%,0.125W	91637	MFF1816G60401F
A61R2034	321-0222-00			RES.,FXD,FILM:2K OHM,1%,0.125W	91637	MFF1816G20000F
A61R2035	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A61R2036	321-0402-00			RES.,FXD,FILM:150K OHM,1%,0.125W	24546	NA55D1503F
A61R2037	321-0327-00			RES.,FXD,FILM:24.9K OHM,1%,0.125W	91637	MFF1816G24901F

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A61R2038	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A61R2039	321-0385-00			RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A61S1014	260-1721-00			SWITCH,ROCKER:8,SPST,125MA,30VDC	00779	435166-5
A61U1011	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A61U1012	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A61U1013	156-0383-02			MICROCIRCUIT,DI:QUAD 2-INP NOR GATE	01295	SN74LS02
A61U1015	156-0994-02			MICROCIRCUIT,DI:8 INPUT DATA SEL/MUX	01295	SN74LS151NP3
A61U1016	156-0392-03			MICROCIRCUIT,DI:QUAD LATCH W/CLEAR	01295	SN74S175NP3
A61U1017	156-0388-03	B042220		MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A61U1020	156-0330-02	B043115		MICROCIRCUIT,DI:HEX BUFFER	04713	MC14050BCLD
A61U1021	156-0865-02			MICROCIRCUIT,DI:OCTAL D-TYPE FF W/CLEAR	01295	SN74LS273NP3
A61U1022	156-0865-02			MICROCIRCUIT,DI:OCTAL D-TYPE FF W/CLEAR	01295	SN74LS273NP3
A61U1023	155-0157-00			MICROCIRCUIT,DI:DIGITAL STORAGE VERTICAL	80009	155-0157-00
A61U1024	156-1255-00			MICROCIRCUIT,LI:D/A CONVERTER	04713	DAC-08HQ
A61U1025	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A61U1031	156-1226-00			MICROCIRCUIT,LI:DUAL COMPARATOR,14 DIP	34335	AM319D
A61U1032	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A61U1033	156-1211-00			MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A61U1034	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A61U2011	156-0480-02			MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A61U2012	156-0718-03			MICROCIRCUIT,DI:TRIPLE 3-INP NOR GATE	01295	SN74LS27
A61U2013	156-0385-02			MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A61U2014	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A61U2015	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A61U2016	156-0994-02			MICROCIRCUIT,DI:8 INPUT DATA SEL/MUX	01295	SN74LS151NP3
A61U2020	156-0172-02	B043115		MICROCIRCUIT,DI:DUAL RETRIG MONOSTABLE MV	01295	SN74123
A61U2021	156-0975-02			MICROCIRCUIT,DI:UNIV SHIFT/STORAGE RGTR	01295	SN74LS299N3/J4
A61U2022	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCCR	01295	SN74LS138NP3
A61U2023	156-0385-02			MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A61U2024	156-1255-00			MICROCIRCUIT,LI:D/A CONVERTER	04713	DAC-08HQ
A61U2032	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A61U2033	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A61U2034	156-0067-12			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	01295	UA741CJG

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A62	670-5548-01		CKT BOARD ASSY:LOG AMP.	80009	670-5548-01
A62C1018	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1019	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1031	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1033	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1041	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1043	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1051	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C1061	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1062	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1063	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1069	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C1071	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1072	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1073	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1086	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1088	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1089	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C1108	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2031	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2033	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2043	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2049	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2052	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C2054	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2062	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C2085	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2098	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2099	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C2105	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3011	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C3025	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3035	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3041	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C3049	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C3069	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3071	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C3082	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3098	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3099	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3100	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3102	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3105	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C3111	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4011	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4016	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4027	283-0201-00		CAP.,FXD,CER DI:27PF,10%,200V	51642	W150-200 X7R270K
A62C4029	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A62C4039	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4041	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4044	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C4045	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A62C4082	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A62C4108	290-0574-00		CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A62C5014	283-0191-00		CAP.,FXD,CER DI:0.022UF,20%,50V	72982	8121N075Z5U0223M
A62C5024	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C5029	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A62C5035	283-0000-00		CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A62C5039	283-0000-00		CAP.,FXD,CER DI:0.001UF,+100-0%,500V	59660	831610Y5U0102P
A62C5101	283-0157-00		CAP.,FXD,CER DI:7PF,5%,500V	59660	8111B065COHO709D
A62C5102	283-0181-00		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A62C6021	283-0648-00		CAP.,FXD,MICA D:10PF,5%,100V	00853	D151C100D0
A62C6023	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A62C6033	290-0574-00		CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A62C7011	283-0639-00		CAP.,FXD,MICA D:56PF,1%,100V	00853	D151E560F0
A62C7014	283-0641-00		CAP.,FXD,MICA D:180PF,1%,100V	00853	DD155F181F0
A62C7021	283-0599-00		CAP.,FXD,MICA D:98PF,5%,500V	00853	D105F980J0
A62C7024	283-0728-00		CAP.,FXD,MICA D:120PF,1%,500V	00853	D155F121F0
A62C7032	290-0574-00		CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A62C7033	290-0574-00		CAP.,FXD,ELCTLT:47UF,10%,20V	90201	TDC476K020CL
A62C7073	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A62C7081	283-0160-00		CAP.,FXD,CER DI:1.5PF,10%,50V	93958	1C15RB
A62C7102	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A62C7103	283-0339-00		CAP.,FXD,CER DI:0.22UF,10%,50V	72982	8131N075W5R224K
A62C7104	283-0114-00		CAP.,FXD,CER DI:0.0015UF,5%,200V	59660	805534Y5DO152J
A62CR1061	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR1062	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR1076	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR1077	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2014	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2015	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2031	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2032	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2044	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2045	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2065	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2066	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2075	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2076	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2087	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2088	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR2089	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR3089	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR4012	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR4015	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR5027	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR5033	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR5081	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A62CR5101	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A62CR6104	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A62CR7095	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A62CR7101	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A62L1051	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A62L2011	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A62L2015	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62L2025	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62L2041	108-0443-00		COIL,RF:25UH	80009	108-0443-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A62L2052	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A62L2055	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62L2071	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62L2085	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62L3041	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A62L3061	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A62L6011	108-0702-00		COIL,RF:36UH	80009	108-0702-00
A62L8021	108-0443-00		COIL,RF:25UH	80009	108-0443-00
A62Q1025	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q1035	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q1050	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q1070	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q1080	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q1095	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q2105	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3015	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3030	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3045	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3055	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3075	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3090	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3100	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q3105	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q4025	151-0333-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS918	04713	SPS1752
A62Q4030	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q4035	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q4070	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q4075	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q4100	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q5057	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q5070	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q5090	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q5095	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62Q6010	151-0192-00		TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A62Q6090	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q6095	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q6110	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q6115	151-0221-00		TRANSISTOR:SILICON,PNP	04713	SPS246
A62Q7110	151-1059-00		TRANSISTOR:SILICON,FE,N-CHANNEL	80009	151-1059-00
A62R1023	321-0258-00		RES.,FXD,FILM:4.75K OHM,1%,0.125W	91637	MFF1816G47500F
A62R1035	321-0111-00		RES.,FXD,FILM:140 OHM,1%,0.125W	91637	MFF1816G140R0F
A62R1045	321-0111-00		RES.,FXD,FILM:140 OHM,1%,0.125W	91637	MFF1816G140R0F
A62R1056	321-0091-00		RES.,FXD,FILM:86.6 OHM,1%,0.125W	91637	MFF1816G86R60F
A62R1076	321-0076-00		RES.,FXD,FILM:60.4 OHM,1%,0.125W	91637	MFF1816G60R40F
A62R1084	321-0323-00		RES.,FXD,FILM:22.6K OHM,1%,0.125W	91637	MFF1816G22601F
A62R1085	311-1277-00		RES.,VAR, NONWIR:100 OHM,10%,0.5W	32997	3329W-L58-101
A62R1086	321-0120-00		RES.,FXD,FILM:174 OHM,1%,0.125W	91637	MFF1816G174R0F
A62R1101	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A62R1111	321-0068-00		RES.,FXD,FILM:49.9 OHM,1%,0.125W	91637	MFF1816G49R90F
A62R2013	321-0226-00		RES.,FXD,FILM:2.21K OHM,1%,0.125W	91637	MFF1816G22100F
A62R2065	321-0276-00		RES.,FXD,FILM:7.32K OHM,1%,0.125W	91637	MFF1816G73200F
A62R2066	321-0234-00		RES.,FXD,FILM:2.67K OHM,1%,0.125W	91637	MFF1816G26700F
A62R2076	321-0254-00		RES.,FXD,FILM:4.32K OHM,1%,0.125W	91637	MFF1816G43200F
A62R2078	321-0292-00		RES.,FXD,FILM:10.7K OHM,1%,0.125W	91637	MFF1816G10701F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A62R2100	321-0187-00		RES.,FXD,FILM:866 OHM,1%,0.125W	91637	MFF1816G866R0F
A62R2101	321-0271-00		RES.,FXD,FILM:6.49K OHM,1%,0.125W	91637	MFF1816G64900F
A62R2111	315-0680-00		RES.,FXD,CMPSN:68 OHM,5%,0.25W	01121	CB6805
A62R3020	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3023	321-0111-00		RES.,FXD,FILM:140 OHM,1%,0.125W	91637	MFF1816G140R0F
A62R3035	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3050	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3065	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3080	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3082	321-0292-00		RES.,FXD,FILM:10.7K OHM,1%,0.125W	91637	MFF1816G10701F
A62R3092	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A62R3095	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R3099	315-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A62R3101	321-0187-00		RES.,FXD,FILM:866 OHM,1%,0.125W	91637	MFF1816G866R0F
A62R3102	321-0087-00		RES.,FXD,FILM:78.7 OHM,1%,0.125W	91637	MFF1816G78R70F
A62R3105	321-0110-00		RES.,FXD,FILM:137 OHM,1%,0.125W	91637	MFF1816G137R0F
A62R3109	315-0241-00		RES.,FXD,CMPSN:240 OHM,5%,0.25W	01121	CB2415
A62R3110	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A62R3111	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A62R4010	307-0610-00		RES NTWK,FXD FI:LOG AMP RES PACK	80009	307-0610-00
A62R4015	321-0111-00		RES.,FXD,FILM:140 OHM,1%,0.125W	91637	MFF1816G140R0F
A62R4020	311-1279-00		RES.,VAR, NONWIR:500 OHM,10%,0.50W	32997	3329W-L58-501
A62R4025	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A62R4026	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A62R4027	315-0560-00		RES.,FXD,CMPSN:56 OHM,5%,0.25W	01121	CB5605
A62R4031	315-0751-00		RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A62R4032	315-0910-00		RES.,FXD,CMPSN:91 OHM,5%,0.25W	01121	CB9105
A62R4034	315-0300-00		RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A62R4036	315-0300-00		RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A62R4038	321-0235-00		RES.,FXD,FILM:2.74K OHM,1%,0.125W	91637	MFF1816G27400F
A62R4039	321-0223-00		RES.,FXD,FILM:2.05K OHM,1%,0.125W	91637	MFF1816G20500F
A62R4045	323-0126-00		RES.,FXD,FILM:200 OHM,1%,0.50W	75042	CECT0-2000F
A62R4046	301-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
A62R4050	321-0041-00		RES.,FXD,FILM:26.1 OHM,1%,0.125W	91637	MFF1816G26R10F
A62R4051	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A62R4052	311-1245-00		RES.,VAR, NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A62R4061	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A62R4062	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A62R4064	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R4071	311-1245-00		RES.,VAR, NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A62R4072	321-0452-00		RES.,FXD,FILM:499K OHM,1%,0.125W	91637	MFF1816G49902F
A62R4074	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R4081	311-1245-00		RES.,VAR, NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A62R4084	321-0431-00		RES.,FXD,FILM:301K OHM,1%,0.125W	91637	MFF1816G30102F
A62R4085	321-0389-00		RES.,FXD,FILM:110K OHM,1%,0.125W	91637	MFF1816G11002F
A62R4091	321-0406-00		RES.,FXD,FILM:165K OHM,1%,0.125W	91637	MFF1816G16502F
A62R4092	321-0423-00		RES.,FXD,FILM:249K OHM,1%,0.125W	91637	MFF1816G24902F
A62R4093	321-0309-00		RES.,FXD,FILM:16.2K OHM,1%,0.125W	91637	MFF1816G16201F
A62R4094	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R4095	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R4096	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R4101	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A62R4102	321-0321-00		RES.,FXD,FILM:21.5K OHM,1%,0.125W	91637	MFF1816G21501F
A62R4103	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A62R5015	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R5020	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A62R5021	321-0389-00			RES.,FXD,FILM:110K OHM,1%,0.125W	91637	MFF1816G11002F
A62R5022	321-0423-00			RES.,FXD,FILM:249K OHM,1%,0.125W	91637	MFF1816G24902F
A62R5024	315-0510-00			RES.,FXD,CMPSN:51 OHM,5%,0.25W	01121	CB5105
A62R5025	315-0751-00			RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A62R5027	321-0126-00			RES.,FXD,FILM:200 OHM,1%,0.125W	91637	MFF1816G200R0F
A62R5029	321-0268-00			RES.,FXD,FILM:6.04K OHM,1%,0.125W	91637	MFF1816G60400F
A62R5031	315-0181-00			RES.,FXD,CMPSN:180 OHM,5%,0.25W	01121	CB1815
A62R5032	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A62R5081	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R5082	321-0290-00			RES.,FXD,FILM:10.2K OHM,1%,0.125W	91637	MFF1816G10201F
A62R5083	321-0424-00			RES.,FXD,FILM:255K OHM,1%,0.125W	91637	MFF1816G25502F
A62R5084	321-0330-00			RES.,FXD,FILM:26.7K OHM,1%,0.125W	91637	MFF1816G26701F
A62R5085	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R5086	315-0754-00			RES.,FXD,CMPSN:750K OHM,5%,0.25W	01121	CB7545
A62R5101	321-0387-00			RES.,FXD,FILM:105K OHM,1%,0.125W	91637	MFF1816G10502F
A62R5102	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A62R5103	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R5105	315-0202-00			RES.,FXD,CMPSN:2K OHM,5%,0.25W	01121	CB2025
A62R5107	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A62R5108	315-0753-00			RES.,FXD,CMPSN:75K OHM,5%,0.25W	01121	CB7535
A62R6024	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A62R6028	321-0164-00			RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A62R6033	321-0126-00			RES.,FXD,FILM:200 OHM,1%,0.125W	91637	MFF1816G200R0F
A62R6034	321-0193-00			RES.,FXD,FILM:1K OHM,1%,0.125W	91637	MFF1816G10000F
A62R6072	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R6073	321-0318-00			RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A62R6074	321-0347-00			RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A62R6081	321-0164-00			RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A62R6082	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A62R6083	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R6084	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A62R6085	321-0171-00			RES.,FXD,FILM:590 OHM,1%,0.125W	91637	MFF1816G590R0F
A62R6101	321-0324-00			RES.,FXD,FILM:23.2K OHM,1%,0.125W	91637	MFF1816G23201F
A62R6102	321-0431-00			RES.,FXD,FILM:301K OHM,1%,0.125W	91637	MFF1816G30102F
A62R6103	321-0243-00			RES.,FXD,FILM:3.32K OHM,1%,0.125W	91637	MFF1816G33200F
A62R6104	321-0349-00			RES.,FXD,FILM:42.2K OHM,1%,0.125W	91637	MFF1816G42201F
A62R6107	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R6108	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A62R6109	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A62R6111	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A62R6112	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.25W	01121	CB4735
A62R6113	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A62R6114	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R7071	321-0376-00			RES.,FXD,FILM:80.6K OHM,1%,0.125W	91637	MFF1816G80601F
A62R7072	321-0242-00			RES.,FXD,FILM:3.24K OHM,1%,0.125W	91637	MFF1816G32400F
A62R7073	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A62R7074	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R7081	321-0170-00			RES.,FXD,FILM:576 OHM,1%,0.125W	91637	MFF1816G576R0F
A62R7082	321-0150-00			RES.,FXD,FILM:357 OHM,1%,0.125W	91637	MFF1816G357R0F
A62R7085	321-0300-00			RES.,FXD,FILM:13K OHM,1%,0.125W	91637	MFF1816G13001F
A62R7086	321-0172-00			RES.,FXD,FILM:604 OHM,1%,0.125W	91637	MFF1816G604R0F
A62R7087	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A62R7092	321-0299-00		RES.,FXD,FILM:12.7K OHM,1%,0.125W	91637	MFF1816G12701F
A62R7093	321-0236-00		RES.,FXD,FILM:2.8K OHM,1%,0.125W	91637	MFF1816G28000F
A62R7095	315-0362-00		RES.,FXD,CMPSN:3.6K OHM,5%,0.25W	01121	CB3625
A62R7096	321-0348-00		RES.,FXD,FILM:41.2K OHM,1%,0.125W	91637	MFF1816G41201F
A62R7097	321-0385-00		RES.,FXD,FILM:100K OHM,1%,0.125W	91637	MFF1816G10002F
A62R7099	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A62R7102	315-0105-00		RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A62R8020	321-0296-00		RES.,FXD,FILM:11.8K OHM,1%,0.125W	91637	MFF1816G11801F
A62R8021	321-0296-00		RES.,FXD,FILM:11.8K OHM,1%,0.125W	91637	MFF1816G11801F
A62R8031	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A62R8034	307-0106-00		RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A62U4090	155-0116-00		MICROCIRCUIT,LI:QUAD OPNL AMPL	80009	155-0116-00
A62U5041	156-0509-00		MICROCIRCUIT,DI:8-BIT BINARY,MULT CUR	04713	MC1408L8
A62U5060	156-0411-02		MICROCIRCUIT,LI:QUAD COMPARTOR,SEL	04713	LM339JDS
A62U5070	156-0385-02		MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A62U6040	156-0913-02		MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A62U6050	156-0913-02		MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A62U6060	156-0411-02		MICROCIRCUIT,LI:QUAD COMPARTOR,SEL	04713	LM339JDS
A62U6070	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A64	670-5553-00		CKT BOARD ASSY:DEFLECTION AMPS	80009	670-5553-00
A64C1018	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C1023	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A64C1037	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A64C1049	283-0203-00		CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A64C2021	281-0661-00		CAP.,FXD,CER DI:0.8PF,+/-0.1PF,500V	04222	7001-COK-OR8B
A64C2022	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C2055	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A64C2066	283-0140-00		CAP.,FXD,CER DI:4.7PF,5%,50V	72982	8101E003A479C
A64C2083	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C2085	281-0661-00		CAP.,FXD,CER DI:0.8PF,+/-0.1PF,500V	04222	7001-COK-OR8B
A64C2087	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C2101	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C2103	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C2106	281-0661-00		CAP.,FXD,CER DI:0.8PF,+/-0.1PF,500V	04222	7001-COK-OR8B
A64C3039	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C3043	281-0661-00		CAP.,FXD,CER DI:0.8PF,+/-0.1PF,500V	04222	7001-COK-OR8B
A64C3051	283-0006-00		CAP.,FXD,CER DI:0.02UF,+80-20%,500V	59660	0841545Z5V00203Z
A64C3073	283-0010-00		CAP.,FXD,CER DI:0.05UF,+100-20%,50V	56289	1C10Z5U503Z050B
A64C4052	281-0204-00		CAP.,VAR,PLSTC:2-22PF,100V	80031	287C00222MJ02
A64C4061	281-0204-00		CAP.,VAR,PLSTC:2-22PF,100V	80031	287C00222MJ02
A64C5021	281-0204-00		CAP.,VAR,PLSTC:2-22PF,100V	80031	287C00222MJ02
A64C5033	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A64C5058	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A64C5089	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A64C5104	281-0204-00		CAP.,VAR,PLSTC:2-22PF,100V	80031	287C00222MJ02
A64C6033	283-0189-00		CAP.,FXD,CER DI:0.1UF,20%,400V	56289	5C40X5R104M400B
A64C6037	283-0189-00		CAP.,FXD,CER DI:0.1UF,20%,400V	56289	5C40X5R104M400B
A64C6073	283-0181-00		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A64C6081	281-0811-00		CAP.,FXD,CER DI:10PF,10%,100V	72982	8035D2AADC1G100K
A64C7015	283-0065-00		CAP.,FXD,CER DI:0.001UF,5%,100V	59660	0835-591Y5EO102J
A64C7061	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7071	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7073	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7074	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7088	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7091	283-0181-00		CAP.,FXD,CER DI:1.8PF,10%,100V	59660	8101B121COKO189B
A64C7093	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7094	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A64C7097	283-0177-00		CAP.,FXD,CER DI:1UF,+80-20%,25V	56289	2C20Z5U105Z025B
A64C7102	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A64CR3058	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR4051	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR4052	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR4058	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR4063	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR4064	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR5054	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR5055	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR6082	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64CR7081	152-0141-02		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A64J1035	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357
A64J2100	131-0608-00		TERMINAL,PIN:0.365 L X 0.025 PH BRZ GOLD	22526	47357

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A64L7061	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A64L7069	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A64L7081	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A64L7088	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A64Q1024	151-0694-01		TRANSISTOR:SILICON,NPN	80009	151-0694-01
A64Q1031	151-0693-01		TRANSISTOR:SILICON,NPN	80009	151-0693-01
A64Q1043	151-0693-01		TRANSISTOR:SILICON,NPN	80009	151-0693-01
A64Q1049	151-0694-01		TRANSISTOR:SILICON,NPN	80009	151-0694-01
A64Q1072	151-0694-01		TRANSISTOR:SILICON,NPN	80009	151-0694-01
A64Q1095	151-0694-01		TRANSISTOR:SILICON,NPN	80009	151-0694-01
A64Q2078	151-0693-01		TRANSISTOR:SILICON,NPN	80009	151-0693-01
A64Q2096	151-0693-01		TRANSISTOR:SILICON,NPN	80009	151-0693-01
A64Q4017	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4022	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4025	151-0261-00		TRANSISTOR:SILICON,PNP,DUAL	04713	SD441
A64Q4026	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64Q4035	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64Q4038	151-0261-00		TRANSISTOR:SILICON,PNP,DUAL	04713	SD441
A64Q4042	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4047	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4077	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4078	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4083	151-0261-00		TRANSISTOR:SILICON,PNP,DUAL	04713	SD441
A64Q4084	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4088	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64Q4098	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64Q4101	151-0261-00		TRANSISTOR:SILICON,PNP,DUAL	04713	SD441
A64Q4102	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q4108	151-0220-00		TRANSISTOR:SILICON,PNP	07263	S036228
A64Q7097	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64Q7103	151-0302-00		TRANSISTOR:SILICON,NPN	07263	S038487
A64R1012	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R1014	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A64R1016	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R1022	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R1023	315-0392-00		RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A64R1024	315-0912-00		RES.,FXD,CMPSN:9.1K OHM,5%,0.25W	01121	CB9125
A64R1031	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R1034	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R1044	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R1045	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R1049	315-0392-00		RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A64R1052	315-0912-00		RES.,FXD,CMPSN:9.1K OHM,5%,0.25W	01121	CB9125
A64R1055	311-1245-00		RES.,VAR,NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A64R1066	311-1245-00		RES.,VAR,NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A64R1081	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R1082	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R1084	315-0751-00		RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A64R1085	315-0472-00		RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A64R1092	315-0751-00		RES.,FXD,CMPSN:750 OHM,5%,0.25W	01121	CB7515
A64R2016	323-0620-00		RES.,FXD,FILM:800K OHM,1%,0.5W	91637	MFF1226G80002F
A64R2053	321-0424-00		RES.,FXD,FILM:255K OHM,1%,0.125W	91637	MFF1816G25502F
A64R2057	321-0372-00		RES.,FXD,FILM:73.2K OHM,1%,0.125W	91637	MFF1816G73201F
A64R2059	321-0415-00		RES.,FXD,FILM:205K OHM,1%,0.125W	91637	MFF1816G20502F

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A64R2062	321-0425-00		RES.,FXD,FILM:261K OHM,1%,0.125W	91637	MFF1816G26102F
A64R2066	321-0380-00		RES.,FXD,FILM:88.7K OHM,1%,0.125W	91637	MFF1816G88701F
A64R2109	323-0620-00		RES.,FXD,FILM:800K OHM,1%,0.5W	91637	MFF1226G80002F
A64R3019	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R3021	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3023	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3027	301-0624-00		RES.,FXD,CMPSN:620K OHM,5%,0.50W	01121	EB6245
A64R3031	301-0624-00		RES.,FXD,CMPSN:620K OHM,5%,0.50W	01121	EB6245
A64R3035	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3037	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3045	323-0620-00		RES.,FXD,FILM:800K OHM,1%,0.5W	91637	MFF1226G80002F
A64R3048	315-0242-00		RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A64R3049	321-0347-00		RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A64R3051	321-0286-00		RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F
A64R3052	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A64R3059	321-0379-00		RES.,FXD,FILM:86.6K OHM,1%,0.125W	91637	MFF1816G86601F
A64R3061	321-0286-00		RES.,FXD,FILM:9.31K OHM,1%,0.125W	91637	MFF1816G93100F
A64R3064	321-0318-00		RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A64R3066	321-0424-00		RES.,FXD,FILM:255K OHM,1%,0.125W	91637	MFF1816G25502F
A64R3071	321-0416-00		RES.,FXD,FILM:210K OHM,1%,0.125W	91637	MFF1816G21002F
A64R3076	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A64R3084	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3086	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3092	323-0620-00		RES.,FXD,FILM:800K OHM,1%,0.5W	91637	MFF1226G80002F
A64R3095	303-0304-00		RES.,FXD,CMPSN:300K OHM,5%,1W	01121	GB3045
A64R3098	303-0304-00		RES.,FXD,CMPSN:300K OHM,5%,1W	01121	GB3045
A64R3101	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3103	321-0229-00		RES.,FXD,FILM:2.37K OHM,1%,0.125W	91637	MFF1816G23700F
A64R3107	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R4021	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A64R4033	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R4057	321-0412-00		RES.,FXD,FILM:191K OHM,1%,0.125W	91637	MFF1816G19102F
A64R4058	321-0215-00		RES.,FXD,FILM:1.69K OHM,1%,0.125W	91637	MFF1816G16900F
A64R4059	321-0412-00		RES.,FXD,FILM:191K OHM,1%,0.125W	91637	MFF1816G19102F
A64R4061	321-0280-00		RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A64R4062	321-0379-00		RES.,FXD,FILM:86.6K OHM,1%,0.125W	91637	MFF1816G86601F
A64R4065	321-0416-00		RES.,FXD,FILM:210K OHM,1%,0.125W	91637	MFF1816G21002F
A64R4067	321-0282-00		RES.,FXD,FILM:8.45K OHM,1%,0.125W	91637	MFF1816G84500F
A64R4069	315-0242-00		RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A64R4071	321-0347-00		RES.,FXD,FILM:40.2K OHM,1%,0.125W	91637	MFF1816G40201F
A64R4072	321-0290-00		RES.,FXD,FILM:10.2K OHM,1%,0.125W	91637	MFF1816G10201F
A64R4073	321-0398-00		RES.,FXD,FILM:137K OHM,1%,0.125W	91637	MFF1816G13702F
A64R5017	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R5023	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5025	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5027	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A64R5029	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5035	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A64R5037	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5039	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5041	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
A64R5043	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5049	321-0419-00		RES.,FXD,FILM:226K OHM,1%,0.125W	91637	MFF1816G22602F
A64R5053	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A64R5078	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5081	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5082	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5084	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5086	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A64R5091	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R5096	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5097	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5099	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A64R5102	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R5107	315-0302-00		RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A64R5109	321-0378-00		RES.,FXD,FILM:84.5K OHM,1%,0.125W	91637	MFF1816G84501F
A64R6034	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A64R6071	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R6072	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R6073	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R6081	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R6082	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R6084	321-0381-00		RES.,FXD,FILM:90.9K OHM,1%,0.125W	91637	MFF1816G90901F
A64R6085	321-0685-00		RES.,FXD,FILM:30K OHM,0.5%,0.125W	91637	MFF1816D30001D
A64R7021	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A64R7022	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A64R7023	315-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.25W	01121	CB5125
A64R7031	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A64R7032	321-0439-00		RES.,FXD,FILM:365K OHM,1%,0.125W	91637	MFF1816G36502F
A64R7034	321-0306-00		RES.,FXD,FILM:15K OHM,1%,0.125W	91637	MFF1816G15001F
A64R7051	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R7078	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A64R7079	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A64R7081	321-0335-00		RES.,FXD,FILM:30.1K OHM,1%,0.125W	91637	CMF55116G30101F
A64R7082	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A64R7086	321-0381-00		RES.,FXD,FILM:90.9K OHM,1%,0.125W	91637	MFF1816G90901F
A64R7089	321-0381-00		RES.,FXD,FILM:90.9K OHM,1%,0.125W	91637	MFF1816G90901F
A64R7091	321-0381-00		RES.,FXD,FILM:90.9K OHM,1%,0.125W	91637	MFF1816G90901F
A64R7092	315-0100-00		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A64R7101	321-0320-00		RES.,FXD,FILM:21K OHM,1%,0.125W	91637	MFF1816G21001F
A64R7102	321-0285-00		RES.,FXD,FILM:9.09K OHM,1%,0.125W	91637	MFF1816G90900F
A64R7107	321-0313-00		RES.,FXD,FILM:17.8K OHM,1%,0.125W	91637	MFF1816G17801F
A64R7108	321-0380-00		RES.,FXD,FILM:88.7K OHM,1%,0.125W	91637	MFF1816G88701F
A64R8071	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A64U2060	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U2062	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U6024	156-1226-00		MICROCIRCUIT,LI:DUAL COMPARATOR,14 DIP	34335	AM319D
A64U6055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A64U6065	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U6073	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U6093	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U6102	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U7055	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00
A64U7065	156-0742-02		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A64U7073	156-0158-04		MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A64VR1035	152-0279-00		SEMICONV DEVICE:ZENER,0.4W,5.1V,5%	04713	SZG35010RL
A64VR3074	152-0279-00		SEMICONV DEVICE:ZENER,0.4W,5.1V,5%	04713	SZG35010RL

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A66	670-5544-00		CKT BOARD ASSY:CRT READOUT	80009	670-5544-00
A66C1012	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C1018	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C1022	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C1034	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C1038	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C1041	283-0196-00		CAP.,FXD,CER DI:270PF,10%,50V	72982	8101B057X7R0271K
A66C1042	283-0032-00		CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A66C1048	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2012	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2013	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A66C2014	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2015	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2016	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2017	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2034	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2036	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C2038	283-0032-00		CAP.,FXD,CER DI:470PF,5%,500V	59660	0831085Z5E00471J
A66C2044	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3014	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3015	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3021	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3022	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A66C3023	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3025	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3026	290-0517-00		CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A66C3027	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3031	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A66C3032	290-0535-00		CAP.,FXD,ELCTLT:33UF,20%,10V	56289	196D336X0010KA1
A66C3033	290-0517-00		CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A66C3035	290-0517-00		CAP.,FXD,ELCTLT:6.8UF,20%,35V	56289	196D685X0035KA1
A66C3036	285-0643-00		CAP.,FXD,PLSTC:0.0047UF,5%,100V	84411	TEK-180 47251
A66CR1041	152-0322-00		SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A66L3028	108-0598-00		COIL,RF:200UH	80009	108-0598-00
A66L3032	108-0598-00		COIL,RF:200UH	80009	108-0598-00
A66L3034	108-0598-00		COIL,RF:200UH	80009	108-0598-00
A66R1012	315-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A66R1036	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66R1041	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66R1042	321-0307-00		RES.,FXD,FILM:15.4K OHM,1%,0.125W	91637	MFF1816G15401F
A66R2012	321-0277-08		RES.,FXD,FILM:7.5K OHM,1%,0.125W	24546	NC55C7501F
A66R2013	321-0277-08		RES.,FXD,FILM:7.5K OHM,1%,0.125W	24546	NC55C7501F
A66R2015	321-0277-08		RES.,FXD,FILM:7.5K OHM,1%,0.125W	24546	NC55C7501F
A66R2016	321-0277-08		RES.,FXD,FILM:7.5K OHM,1%,0.125W	24546	NC55C7501F
A66R2036	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66R2037	315-0183-00		RES.,FXD,CMPSN:18K OHM,5%,0.25W	01121	CB1835
A66R2038	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66R2039	321-0359-00		RES.,FXD,FILM:53.6K OHM,1%,0.125W	91637	MFF1816G53601F
A66R2042	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66R3014	321-0256-00		RES.,FXD,FILM:4.53K OHM,1%,0.125W	91637	MFF1816G45300F
A66R3015	321-0333-00		RES.,FXD,FILM:28.7K OHM,1%,0.125W	91637	MFF1816G28701F
A66R3022	321-0242-00		RES.,FXD,FILM:3.24K OHM,1%,0.125W	91637	MFF1816G32400F
A66R3023	321-0684-00		RES.,FXD,FILM:15K OHM,0.5%,0.125W	91637	MFF1816D15001D

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A66R3032	315-0103-00		RES., FXD, CMPSN:10K OHM,5%,0.25W	01121	CB1035
A66U1014	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A66U1018	156-0385-02		MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A66U1022	156-0386-02		MICROCIRCUIT,DI:TRIPLE 3-INP NAND GATE	27014	DM74LS10N
A66U1024	156-0956-02		MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A66U1026	156-0716-00		MICROCIRCUIT,DI:RAM,128 X 8 STATIC	04713	MCM6810S
A66U1028	156-1170-00		MICROCIRCUIT,DI:ROM,CHAR GEN	27014	DM8678CAB/N
A66U1036	156-0391-02		MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A66U1038	156-0480-02		MICROCIRCUIT,DI:QUAD 2 INP & GATE	01295	SN74LS08NP3
A66U2012	156-0844-02		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A66U2016	156-0844-02		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A66U2018	156-0844-02		MICROCIRCUIT,DI:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A
A66U2022	156-1255-00		MICROCIRCUIT,LI:D/A CONVERTER	04713	DAC-08HQ
A66U2024	156-0982-00		MICROCIRCUIT,DI:OCTAL D EDGE TRIG F-F	01295	SN74LS374
A66U2028	156-0956-02		MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A66U2032	156-0479-02		MICROCIRCUIT,DI:QUAD 2-INP OR GATE	01295	SN74LS32NP3
A66U2034	156-0392-03		MICROCIRCUIT,DI:QUAD LATCH W/CLEAR	01295	SN74S175NP3
A66U2036	156-1059-01		MICROCIRCUIT,DI:DUAL J-K EDGE TRIGGERED	01295	SN74LS109A
A66U2038	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A66U2042	156-0733-02		MICROCIRCUIT,DI:DUAL MONOSTABLE MV,SCRN	04713	SN74LS221N/J
A66U2044	156-0733-02		MICROCIRCUIT,DI:DUAL MONOSTABLE MV,SCRN	04713	SN74LS221N/J
A66U3012	156-1255-00		MICROCIRCUIT,LI:D/A CONVERTER	04713	DAC-08HQ
A66U3018	156-1211-00		MICROCKT,INTFC:QUAD SPST SWITCH,2NC,2NO	80009	156-1211-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A68	644-0141-01	B030000	B042199	VAR RESOLN MDLE:#2	80009	644-0141-01
A68	644-0141-02	B042200		VAR RESOLN KIT:#2	80009	644-0141-02
A68A1	670-5536-01	B030000	B042199	CKT BOARD ASSY:#2 V.R. MOTHER	80009	670-5536-01
A68A1	670-5536-02	B042200		CKT BOARD ASSY:#2 VR MOTHER	80009	670-5536-02
A68A1C2011	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C2015	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C2018	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C2023	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A1C2033	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A1C3019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C3027	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C3041	290-0340-00			CAP.,FXD,ELCTLT:10UF,10%,50V	56289	109D106X9050C2
A68A1C3042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C4027	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1C4035	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A1C4037	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A1C4038	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A1C4039	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A1CR3022	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3023	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3024	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3025	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3026	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3027	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3031	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3033	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR3034	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1CR4029	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A68A1E4039	276-0576-00	B030000	B042199	CORE,EM:TOROID,FERRITE	78488	#57-0047
A68A1L4025	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A68A1L4031	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A68A1Q3035	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A68A1Q3036	151-0136-00			TRANSISTOR:SILICON,NPN	02735	35495
A68A1Q4035	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A68A1Q4037	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A68A1R2014	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A68A1R2026	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A68A1R2031	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R2033	321-0756-00			RES.,FXD,FILM:50K OHM,1%,0.125W	24546	NA55D5002F
A68A1R2035	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A68A1R2038	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A68A1R3014	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A68A1R3015	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A68A1R3019	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3020	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3021	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3022	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3023	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3024	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3025	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3026	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A1R3027	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3028	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3029	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3030	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3031	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3032	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3033	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3034	311-0978-00			RES.,VAR,NONWIR:250 OHM,10%,0.50W	73138	82-4-2
A68A1R3035	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A1R3036	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3037	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A68A1R3038	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R3039	321-0260-00			RES.,FXD,FILM:4.99K OHM,1%,0.125W	91637	MFF1816G49900F
A68A1R3041	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A68A1R3042	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A68A1R3043	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A1R3044	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A1R3045	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A68A1R4026	321-0239-00			RES.,FXD,FILM:3.01K OHM,1%,0.125W	91637	MFF1816G30100F
A68A1R4029	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A68A1R4031	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A1R4039	315-0100-00	B042200		RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A68A1U3010	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A68A1U3017	156-0913-02			MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A68A1U3023	156-1235-00			MICROCIRCUIT,DI:BCD TO DECIMAL DECODER/DR	80009	156-1235-00
A68A1U3038	156-0158-04			MICROCIRCUIT,L:I:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A68A1U4022	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A68A2	670-5534-01	B030000	B031129	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-01
A68A2	670-5534-02	B031130	B042199	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-02
A68A2	-----			(492 ONLY)		
A68A2	-----			(XTALS NOT INCLUDED WITH THIS CKT BD)		
A68A2	670-5534-04	B042200	B042399	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-04
A68A2	670-5534-05	B042400	B042749	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-05
A68A2	670-5534-06	B042750		CKT BOARD ASSY:: 2ND FILTER SELECT	80009	670-5534-06
A68A2	-----			(492 ONLY)		
A68A2	-----			(XTALS NOT INCLUDED WITH THIS CKT BD)		
A68A2	670-5534-01	B030000	B031113	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-01
A68A2	670-5534-02	B031114	B042199	CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-02
A68A2	670-5534-04	B042200		CKT BOARD ASSY:2ND FILTER SELECT	80009	670-5534-04
A68A2	-----			(492P ONLY)		
A68A2	-----			(XTALS NOT INCLUDED WITH THIS CKT BD)		
A68A2C1015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1035	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1041	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1047	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1059	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C1060	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2016	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2018	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2019	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A2C2028	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2030	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2033	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2041	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2050	281-0245-00			CAP.,VAR,CER DI:7.5-50PF,400V	91293	9694
A68A2C2054	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2063	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2064	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C2070	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A2C3025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C3048	281-0620-00			CAP.,FXD,CER DI:21PF,1%,500V	59660	301-000C0G0210F
A68A2C3063	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C3065	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C3067	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C4049	281-0529-00	B030000	B031129	CAP.,FXD,CER DI:1.5PF,+/-0.25PF,500V (492 ONLY)	04222	7001-COK1R5C
A68A2C4049	-----					
A68A2C4049	281-0619-00	B031130		CAP.,FXD,CER DI:1.2PF,+/-0.1PF,200V (492 ONLY)	59660	374 018 C0K0129B
A68A2C4049	-----					
A68A2C4049	281-0523-00	B030000	B031113	CAP.,FXD,CER DI:100PF,+/-20PF,500V (492P ONLY)	72982	301-000U2M0101M
A68A2C4049	-----					
A68A2C4049	281-0619-00	B031114		CAP.,FXD,CER DI:1.2PF,+/-0.1PF,200V (492P ONLY)	59660	374 018 C0K0129B
A68A2C4049	-----					
A68A2C4050	283-0640-00			CAP.,FXD,MICA D:160PF,1%,100V	00853	D155F161F0
A68A2C5054	283-0640-00			CAP.,FXD,MICA D:160PF,1%,100V	00853	D155F161F0
A68A2C5055	281-0245-00			CAP.,VAR,CER DI:7.5-50PF,400V	91293	9694
A68A2C6011	281-0182-00			CAP.,VAR,PLSTC:1.8-10PF,500V	80031	2805D1R810BH02F0
A68A2C6020	283-0770-00			CAP.,FXD,MICA D:300PF,1%,500V	00853	D15-5F301F0
A68A2C6052	281-0620-00			CAP.,FXD,CER DI:21PF,1%,500V	59660	301-000C0G0210F
A68A2C6053	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C6064	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C6065	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C6072	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C6073	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C7011	281-0182-00			CAP.,VAR,PLSTC:1.8-10PF,500V	80031	2805D1R810BH02F0
A68A2C7061	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8016	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8027	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8040	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8045	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8046	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8057	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8061	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2C8075	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A2CR1017	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1019	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1020	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1022	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1025	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1029	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1038	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1040	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1050	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR1052	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A2CR7065	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR7067	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR7070	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR7071	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8015	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8016	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8035	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8036	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8059	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2CR8060	152-0107-00		SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A68A2L1019	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L1025	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L1032	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L1045	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L1055	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L2013	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L2075	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L3055	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A68A2L4060	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A68A2L6056	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L7075	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L8020	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L8040	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L8061	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2L8070	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A68A2Q2020	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q2025	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q2035	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q2040	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q2055	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q6065	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q6075	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q7060	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q8035	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2Q8050	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A2R1033	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R1035	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R1050	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R1055	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R1059	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R1065	311-0622-00		RES.,VAR,NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A68A2R1069	321-0713-00		RES.,FXD,FILM:30 OHM,1%,0.125W	91637	MFF1816G30R00F
A68A2R2013	304-0681-00		RES.,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A68A2R2016	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R2020	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R2025	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R2026	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R2030	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R2034	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R2037	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R2040	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R2043	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R2044	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R2045	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A2R2047	321-0054-00	B030000	B031129	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492 ONLY)	91637	MFF1816G35R70F
A68A2R2047	-----					
A68A2R2047	321-0037-00	B031130	B042199	RES.,FXD,FILM:23.7 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G23R70F
A68A2R2047	-----					
A68A2R2047	321-0054-00	B042200		RES.,FXD,FILM:35.7 OHM,5%,0.125W (492 ONLY)	91637	MFF1816G35R70F
A68A2R2047	-----					
A68A2R2047	321-0054-00	B030000	B031113	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492P ONLY)	91637	MFF1816G35R70F
A68A2R2047	-----					
A68A2R2047	321-0037-00	B031114		RES.,FXD,FILM:23.7 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G23R70F
A68A2R2047	-----					
A68A2R2048	321-0114-00	B030000	B031129	RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A68A2R2048	-----					
A68A2R2048	321-0130-00	B031130	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G221R0F
A68A2R2048	-----					
A68A2R2048	321-0114-00	B042200		RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A68A2R2048	-----					
A68A2R2048	321-0114-00	B030000	B031113	RES.,FXD,FILM:150 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G150R0F
A68A2R2048	-----					
A68A2R2048	321-0130-00	B031114	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G221R0F
A68A2R2048	-----					
A68A2R2049	321-0114-00	B030000	B031129	RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A68A2R2049	-----					
A68A2R2049	321-0130-00	B031130	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G221R0F
A68A2R2049	-----					
A68A2R2049	321-0114-00	B042200		RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A68A2R2049	-----					
A68A2R2049	321-0114-00	B030000	B031113	RES.,FXD,FILM:150 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G150R0F
A68A2R2049	-----					
A68A2R2049	321-0130-00	B031114	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G221R0F
A68A2R2049	-----					
A68A2R2059	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R2060	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A68A2R2065	321-0032-00			RES.,FXD,FILM:21 OHM,1%,0.125W	91637	MFF1816G21R00F
A68A2R3015	311-0622-00			RES.,VAR, NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A68A2R3016	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A68A2R3019	321-0032-00			RES.,FXD,FILM:21 OHM,1%,0.125W	91637	MFF1816G21R00F
A68A2R3020	321-0713-00			RES.,FXD,FILM:30 OHM,1%,0.125W	91637	MFF1816G30R00F
A68A2R3022	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R3024	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R3025	311-0622-00			RES.,VAR, NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A68A2R3028	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R3029	321-0032-00			RES.,FXD,FILM:21 OHM,1%,0.125W	91637	MFF1816G21R00F
A68A2R3031	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A68A2R3035	311-0622-00			RES.,VAR, NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A68A2R3039	321-0032-00			RES.,FXD,FILM:21 OHM,1%,0.125W	91637	MFF1816G21R00F
A68A2R4016	321-0713-00			RES.,FXD,FILM:30 OHM,1%,0.125W	91637	MFF1816G30R00F
A68A2R4035	315-0300-00			RES.,FXD,CMPSN:30 OHM,5%,0.25W	01121	CB3005
A68A2R4037	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A68A2R5074	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R5075	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R6060	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R6061	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R6065	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R6066	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A2R6070	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R6075	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R7060	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R7061	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R7062	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R7063	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R8026	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R8027	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R8030	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R8035	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R8046	315-0332-00		RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A68A2R8049	315-0121-00		RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A68A2R8050	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R8055	315-0103-00		RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A68A2R8070	304-0681-00		RES.,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A68A2T4019	120-1241-00		TRANSFORMER,RF:TOROID,3 WINDS TRIFILAR	80009	120-1241-00
A68A2T4040	120-1338-00		TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1338-00
A68A2T5030	120-1237-00		TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1237-00
A68A2T6040	120-1237-00		TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1237-00
A68A2T6045	120-1338-00		TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1338-00
A68A2T7015	120-1241-00		TRANSFORMER,RF:TOROID,3 WINDS TRIFILAR	80009	120-1241-00
A68A2U3070	156-1235-00		MICROCIRCUIT,DI:BCD TO DECIMAL DECODER/DR	80009	156-1235-00
	-----		(Y5012,45035,45046,47019 NOT INCLUDED		
	-----		WITH THIS CKT BRD SEE CHASSIS PARTS		
	-----		FOR REPLACEABLE PART NUMBERS)		

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A68A3	670-5533-02		CKT BOARD ASSY:BAND LEVELING	80009	670-5533-02
A68A3C1015	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C1017	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C1021	283-0107-00		CAP.,FXD,CER DI:51PF,5%,.200V	96733	R3017
A68A3C1025	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C1032	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C1035	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C1039	283-0107-00		CAP.,FXD,CER DI:51PF,5%,.200V	96733	R3017
A68A3C1044	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2018	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2023	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2028	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,.50V	96733	R2676
A68A3C2033	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2034	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2042	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3C2043	283-0204-00		CAP.,FXD,CER DI:0.01UF,20%,.50V	96733	R2676
A68A3C2046	283-0111-00		CAP.,FXD,CER DI:0.1UF,20%,.50V	56289	273C11
A68A3CR2021	152-0524-00		SEMICONV DEVICE:SILICON,100V,100MA	80009	152-0524-00
A68A3Q1025	151-0282-00		TRANSISTOR:SILICON,NPN	80009	151-0282-00
A68A3Q1031	151-0282-00		TRANSISTOR:SILICON,NPN	80009	151-0282-00
A68A3Q1033	151-0282-00		TRANSISTOR:SILICON,NPN	80009	151-0282-00
A68A3Q1041	151-0650-00		TRANSISTOR:SILICON,NPN	80009	151-0650-00
A68A3Q2015	151-0282-00		TRANSISTOR:SILICON,NPN	80009	151-0282-00
A68A3Q2016	151-0283-00		TRANSISTOR:SILICON,NPN	07263	S032790
A68A3Q2019	151-0282-00		TRANSISTOR:SILICON,NPN	80009	151-0282-00
A68A3Q2046	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A68A3R1013	321-0130-00		RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A68A3R1014	317-0390-00		RES.,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A68A3R1015	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A3R1016	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A3R1017	315-0390-00		RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A68A3R1019	315-0390-00		RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A68A3R1024	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A3R1025	321-0164-00		RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A68A3R1026	321-0194-00		RES.,FXD,FILM:1.02K OHM,1%,0.125W	91637	MFF1816G10200F
A68A3R1027	321-0065-00		RES.,FXD,FILM:46.4 OHM,1%,0.125W	91637	MFF1816G46R40F
A68A3R1028	315-0471-00		RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A68A3R1029	317-0390-00		RES.,FXD,CMPSN:39 OHM,5%,0.125W	01121	BB3905
A68A3R1031	321-0130-00		RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A68A3R1033	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A3R1035	315-0681-00		RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A3R1036	315-0220-00		RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A68A3R1037	315-0220-00		RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A68A3R1038	317-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A68A3R1044	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A68A3R1046	321-0065-00		RES.,FXD,FILM:46.4 OHM,1%,0.125W	91637	MFF1816G46R40F
A68A3R1047	315-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A68A3R1048	321-0164-00		RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A68A3R2017	315-0152-00		RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A68A3R2018	315-0152-00		RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A68A3R2021	315-0470-00		RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A68A3R2024	321-0058-00		RES.,FXD,FILM:39.2 OHM,1%,0.125W	91637	MFF1816G39R20F
A68A3R2025	321-0234-00		RES.,FXD,FILM:2.67K OHM,1%,0.125W	91637	MFF1816G26700F

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A68A3R2026	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A3R2028	317-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.125W	01121	BB4705
A68A3R2031	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A68A3R2033	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A68A3R2034	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A68A3R2036	321-0151-00			RES.,FXD,FILM:365 OHM,1%,0.125W	91637	MFF1816G365R0F
A68A3R2037	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A68A3R2038	315-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A68A3R2041	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A68A3R2042	321-0051-00			RES.,FXD,FILM:33.2 OHM,1%,0.125W	91637	MFF1816G33R20F
A68A3R2043	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A68A3R2045	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A68A3R2046	317-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A68A3T2013	120-0902-00			XFMR,TOROID:5 TURNS,BIFILAR	80009	120-0902-00
A68A4	670-5535-01			CKT BOARD ASSY:POST V.R. AMPLIFIER	80009	670-5535-01
A68A4C1022	281-0167-00			CAP.,VAR,CER DI:9-45PF,200V	59660	538-011D9-45
A68A4C1023	283-0642-00			CAP.,FXD,MICA D:33PF,+/-0.5PF,300V	00853	D10-5E330G
A68A4C1029	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A4C1033	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A4C1044	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A68A4C1052	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A4C2018	283-0628-00			CAP.,FXD,MICA D:410PF,1%,500V	00853	D155F411F0
A68A4C2023	283-0691-00			CAP.,FXD,MICA D:650PF,1%,300V	00853	D153F651F0
A68A4C2025	283-0642-00			CAP.,FXD,MICA D:33PF,+/-0.5PF,300V	00853	D10-5E330G
A68A4C2026	281-0167-00			CAP.,VAR,CER DI:9-45PF,200V	59660	538-011D9-45
A68A4C2033	283-0628-00			CAP.,FXD,MICA D:410PF,1%,500V	00853	D155F411F0
A68A4C2038	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A4C2052	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A4C2053	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A68A4L2021	108-1042-00			COIL,RF:FIXED,4.7UH	80009	108-1042-00
A68A4L2031	108-1042-00			COIL,RF:FIXED,4.7UH	80009	108-1042-00
A68A4Q1048	151-0446-00			TRANSISTOR:SILICON,NPN	80009	151-0446-00
A68A4Q2056	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A68A4R1029	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A68A4R1039	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A68A4R1052	315-0561-00			RES.,FXD,CMPSN:560 OHM,5%,0.25W	01121	CB5615
A68A4R1058	315-0361-00			RES.,FXD,CMPSN:360 OHM,5%,0.25W	01121	CB3615
A68A4R2036	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A68A4R2038	311-0622-00			RES.,VAR,NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A68A4R2041	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A4R2042	315-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A68A4R2043	321-0001-00			RES.,FXD,FILM:10 OHM,1%,0.125W	75042	CEAT0-10R00F
A68A4R2044	301-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.50W	01121	EB8215
A68A4R2045	301-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.50W	01121	EB8215
A68A4R2052	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A68A4R2062	321-0130-00			RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A68A4T1038	120-0459-00			XFMR,TOROID:10 TURNS,BIFILAR	80009	120-0459-00
A68A4T1059	120-1237-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1237-00
A68A4T2063	120-0902-00			XFMR,TOROID:5 TURNS,BIFILAR	80009	120-0902-00

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A69	644-0140-01	B030000	B042199	VAR RESOLN MDLE: #1	80009	644-0140-01
A69	644-0140-02	B042200		VAR RESOLN KIT:	80009	644-0140-02
A69A1	670-5528-01	B030000	B042199	CKT BOARD ASSY: #1 V.R. MOTHER	80009	670-5528-01
A69A1	670-5528-02	B042200		CKT BOARD ASSY: #1 VR MOTHER	80009	670-5528-02
A69A1C1066	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1067	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1068	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1069	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1075	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1082	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1083	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1084	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C1085	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C2076	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C2086	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C2088	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3025	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3026	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3027	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3028	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3029	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3035	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3042	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3043	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3048	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3049	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1C3062	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3065	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3077	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3083	283-0204-00	B030000	B042199	CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A1C3088	283-0111-00	B030000	B042199	CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A1L3065	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A69A1L3066	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A69A1R1065	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1066	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1067	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1068	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1075	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1082	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1083	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1084	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R1085	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R2076	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R2086	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R2088	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3019	315-0270-00			RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A69A1R3026	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3028	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3029	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3035	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A1R3043	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3048	307-0106-00			RES.,FXD,CMPSN:4.7 OHM,5%,0.25W	01121	CB47G5
A69A1R3049	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A69A1R3081	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A2	670-5529-01			CKT BOARD ASSY:V.R. INPUT	80009	670-5529-01
A69A2C1016	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A2C1019	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A2C1022	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A2C1025	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A2C1026	281-0167-00			CAP.,VAR,CER DI:9-45PF,200V	59660	538-011D9-45
A69A2C1031	283-0647-00			CAP.,FXD,MICA D:70PF,1%,100V	00853	D155E700F0
A69A2C1032	283-0634-00			CAP.,FXD,MICA D:65PF,1%,100V	00853	D155E650F0
A69A2C1033	281-0167-00			CAP.,VAR,CER DI:9-45PF,200V	59660	538-011D9-45
A69A2C1035	281-0577-00			CAP.,FXD,CER DI:14PF,5%,500V	04222	7001-COG-140J
A69A2C1036	283-0634-00			CAP.,FXD,MICA D:65PF,1%,100V	00853	D155E650F0
A69A2C1037	283-0647-00			CAP.,FXD,MICA D:70PF,1%,100V	00853	D155E700F0
A69A2L1018	108-0395-00			COIL,RF:64UH	80009	108-0395-00
A69A2L1027	108-0701-00			COIL,RF:1.3UH	80009	108-0701-00
A69A2L1033	108-0701-00			COIL,RF:1.3UH	80009	108-0701-00
A69A2Q1023	151-0650-00			TRANSISTOR:SILICON,NPN	80009	151-0650-00
A69A2R1014	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A69A2R1015	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A69A2R1016	321-0054-00			RES.,FXD,FILM:35.7 OHM,5%,0.125W	91637	MFF1816G35R70F
A69A2R1022	315-0270-00			RES.,FXD,CMPSN:27 OHM,5%,0.25W	01121	CB2705
A69A2R1023	307-0113-00			RES.,FXD,CMPSN:5.1 OHM,5%,0.25W	01121	CB51G5
A69A2R1024	315-0911-00			RES.,FXD,CMPSN:910 OHM,5%,0.25W	01121	CB9115
A69A2R1025	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A69A2R1026	315-0511-00			RES.,FXD,CMPSN:510 OHM,5%,0.25W	01121	CB5115
A69A2T1019	120-0459-00			XFMR,TOROID:10 TURNS,BIFILAR	80009	120-0459-00
A69A3	670-5530-01			CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-01
A69A3	-----			(XTALS NOT INCLUDED IN THIS CKT BD)		
A69A3	670-5530-01	B030000	B031129	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-01
A69A3	-----			(492 ONLY)		
A69A3	670-5530-02	B031130	B042199	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-02
A69A3	-----			(492 ONLY)		
A69A3	670-5530-03	B042200		CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-03
A69A3	-----			(492 ONLY)		
A69A3	670-5530-01	B030000	B031113	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-01
A69A3	-----			(492P ONLY)		
A69A3	670-5530-02	B031114	B042199	CKT BOARD ASSY:1ST FILTER SELECT	80009	670-5530-02
A69A3	-----			(492P ONLY)		
A69A3C1014	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1016	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1017	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1021	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1030	281-0182-00			CAP.,VAR,PLSTC:1.8-10PF,500V	80031	2805D1R810BH02F0
A69A3C1035	281-0182-00			CAP.,VAR,PLSTC:1.8-10PF,500V	80031	2805D1R810BH02F0

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A69A3C1054	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1055	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1056	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C1060	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2012	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2013	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2016	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2017	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2019	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2020	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2029	283-0770-00			CAP.,FXD,MICA D:300PF,1%,500V	00853	D15-5F301F0
A69A3C2037	281-0221-00			CAP.,VAR,CER DI:2-10PF,100V	59660	513-013A 2 0-10
A69A3C2051	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2054	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2057	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2058	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C2060	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3011	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3014	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3016	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3017	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3018	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3020	281-0620-00			CAP.,FXD,CER DI:21PF,1%,500V	59660	301-000C0G0210F
A69A3C3023	281-0245-00			CAP.,VAR,CER DI:7.5-50PF,400V	91293	9694
A69A3C3024	283-0640-00			CAP.,FXD,MICA D:160PF,1%,100V	00853	D155F161F0
A69A3C3030	281-0529-00	B030000	B031129	CAP.,FXD,CER DI:1.5PF,+/-0.25PF,500V	04222	7001-COK1R5C
A69A3C3030	-----			(492 ONLY)		
A69A3C3030	281-0619-00	B031130		CAP.,FXD,CER DI:1.2PF,+/-0.1PF,200V	59660	374 018 C0K0129B
A69A3C3030	-----			(492 ONLY)		
A69A3C3030	281-0529-00	B030000	B031113	CAP.,FXD,CER DI:1.5PF,+/-0.25PF,500V	04222	7001-COK1R5C
A69A3C3030	-----			(492P ONLY)		
A69A3C3030	281-0619-00	B031114		CAP.,FXD,CER DI:1.2PF,+/-0.1PF,200V	59660	374 018 C0K0129B
A69A3C3030	-----			(492P ONLY)		
A69A3C3035	281-0245-00			CAP.,VAR,CER DI:7.5-50PF,400V	91293	9694
A69A3C3038	283-0640-00			CAP.,FXD,MICA D:160PF,1%,100V	00853	D155F161F0
A69A3C3048	281-0620-00			CAP.,FXD,CER DI:21PF,1%,500V	59660	301-000C0G0210F
A69A3C3056	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3058	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C3059	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4015	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4022	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4029	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4031	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4032	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4038	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4039	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4040	281-0111-00			CAP.,VAR,AIR DI:2-27PF,650V	74970	193-8-5
A69A3C4054	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4056	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4057	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4059	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3C4069	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A3CR1010	152-0107-04			SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscnt	Name & Description	Mfr Code	Mfr Part Number
A69A3CR1011	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR1012	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR1013	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR1017	152-0153-00		SEMICONV DEVICE:SILICON,15V,50MA	07263	FD7003
A69A3CR1018	152-0153-00		SEMICONV DEVICE:SILICON,15V,50MA	07263	FD7003
A69A3CR1021	152-0153-00		SEMICONV DEVICE:SILICON,15V,50MA	07263	FD7003
A69A3CR1022	152-0153-00		SEMICONV DEVICE:SILICON,15V,50MA	07263	FD7003
A69A3CR1055	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR1059	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2010	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2011	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2012	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2013	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2055	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2059	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2062	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR2066	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3010	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3011	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3012	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3014	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3060	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3061	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR3062	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR4064	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR4065	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3CR4068	152-0107-04		SEMICONV DEVICE:SILICON,400V,400MA,SEL	14936	GPD-011
A69A3L1011	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L1012	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L1059	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L1067	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L2011	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L2012	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L2035	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L2055	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L2060	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L2062	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L3012	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L3013	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L3014	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L3029	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L3036	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L3040	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L3055	108-0964-00		COIL,RF:FIXED,115NH,TOROIDAL INDUCT	80009	108-0964-00
A69A3L3059	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L4018	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L4043	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L4049	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L4058	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3L4065	108-0395-00		COIL,RF:64UH	80009	108-0395-00
A69A3Q1019	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q1020	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q1055	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q2019	151-0301-00		TRANSISTOR:SILICON,PNP	27014	2N2907A

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A69A3Q2020	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q2050	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q3019	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q3055	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q3060	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q4019	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q4050	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3Q4055	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A3R1015	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R1016	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R1017	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R1018	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1019	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1020	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1022	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1026	321-0159-00	B030000	B031129	RES.,FXD,FILM:442 OHM,1%,0.125W	91637	MFF1816G442R0F
A69A3R1026	-----			(492 ONLY)		
A69A3R1026	321-0121-00	B031130		RES.,FXD,FILM:178 OHM,1%,0.125W	91637	MFF1816G178R0F
A69A3R1026	-----			(492 ONLY)		
A69A3R1026	321-0159-00	B030000	B031113	RES.,FXD,FILM:442 OHM,1%,0.125W	91637	MFF1816G442R0F
A69A3R1026	-----			(492P ONLY)		
A69A3R1026	321-0121-00	B031114		RES.,FXD,FILM:178 OHM,1%,0.125W	91637	MFF1816G178R0F
A69A3R1026	-----			(492P ONLY)		
A69A3R1027	321-0159-00	B030000	B031129	RES.,FXD,FILM:442 OHM,1%,0.125W	91637	MFF1816G442R0F
A69A3R1027	-----			(492 ONLY)		
A69A3R1027	321-0121-00	B031130		RES.,FXD,FILM:178 OHM,1%,0.125W	91637	MFF1816G178R0F
A69A3R1027	-----			(492 ONLY)		
A69A3R1027	321-0159-00	B030000	B031113	RES.,FXD,FILM:442 OHM,1%,0.125W	91637	MFF1816G442R0F
A69A3R1027	-----			(492P ONLY)		
A69A3R1027	321-0121-00	B031114		RES.,FXD,FILM:178 OHM,1%,0.125W	91637	MFF1816G178R0F
A69A3R1027	-----			(492P ONLY)		
A69A3R1027	321-0008-00	B030000	B031129	RES.,FXD,FILM:11.8 OHM,1%,0.125W	91637	MFF1816G11R80F
A69A3R1028	-----			(492 ONLY)		
A69A3R1028	321-0713-00	B031130		RES.,FXD,FILM:30 OHM,1%,0.125W	91637	MFF1816G30R00F
A69A3R1028	-----			(492 ONLY)		
A69A3R1028	321-0008-00	B030000	B031113	RES.,FXD,FILM:11.8 OHM,1%,0.125W	91637	MFF1816G11R80F
A69A3R1028	-----			(492P ONLY)		
A69A3R1028	321-0713-00	B031114		RES.,FXD,FILM:30 OHM,1%,0.125W	91637	MFF1816G30R00F
A69A3R1028	-----			(492P ONLY)		
A69A3R1054	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R1055	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R1057	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1058	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R1067	304-0681-00			RES.,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A69A3R2013	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R2014	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R2015	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R2016	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R2017	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R2018	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R2019	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R2020	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R2023	321-0008-00	B030000	B031129	RES.,FXD,FILM:11.8 OHM,1%,0.125W	91637	MFF1816G11R80F
A69A3R2023	-----			(492 ONLY)		

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A3R2023	321-0713-00	B031130	B042199	RES.,FXD,FILM:30 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G30R00F
A69A3R2023	-----					
A69A3R2023	321-0026-00	B042200		RES.,FXD,FILM:18.2 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G18R20F
A69A3R2023	-----					
A69A3R2023	321-0008-00	B030000	B031113	RES.,FXD,FILM:11.8 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G11R80F
A69A3R2023	-----					
A69A3R2023	321-0713-00	B031114	B042199	RES.,FXD,FILM:30 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G30R00F
A69A3R2023	-----					
A69A3R2024	321-0159-00	B030000	B031129	RES.,FXD,FILM:442 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G442R0F
A69A3R2024	-----					
A69A3R2024	321-0121-00	B031130	B042199	RES.,FXD,FILM:178 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G178R0F
A69A3R2024	-----					
A69A3R2024	321-0143-00	B042200		RES.,FXD,FILM:301 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G301R0F
A69A3R2024	-----					
A69A3R2024	321-0159-00	B030000	B031113	RES.,FXD,FILM:442 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G442R0F
A69A3R2024	-----					
A69A3R2024	321-0121-00	B031114	B042199	RES.,FXD,FILM:178 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G178R0F
A69A3R2024	-----					
A69A3R2025	321-0159-00	B030000	B031129	RES.,FXD,FILM:442 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G442R0F
A69A3R2025	-----					
A69A3R2025	321-0121-00	B031130	B042199	RES.,FXD,FILM:178 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G178R0F
A69A3R2025	-----					
A69A3R2025	321-0143-00	B042200		RES.,FXD,FILM:301 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G301R0F
A69A3R2025	-----					
A69A3R2025	321-0159-00	B030000	B031113	RES.,FXD,FILM:442 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G442R0F
A69A3R2025	-----					
A69A3R2025	321-0121-00	B031114	B042199	RES.,FXD,FILM:178 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G178R0F
A69A3R2025	-----					
A69A3R2026	321-0226-00	B030000	B031129	RES.,FXD,FILM:2.21K OHM,1%,0.125W (492 ONLY)	91637	MFF1816G22100F
A69A3R2026	-----					
A69A3R2026	321-0054-00	B031130		RES.,FXD,FILM:35.7 OHM,5%,0.125W (492 ONLY)	91637	MFF1816G35R70F
A69A3R2026	-----					
A69A3R2026	321-0226-00	B030000	B031113	RES.,FXD,FILM:2.21K OHM,1%,0.125W (492P ONLY)	91637	MFF1816G22100F
A69A3R2026	-----					
A69A3R2026	321-0054-00	B031114		RES.,FXD,FILM:35.7 OHM,5%,0.125W (492P ONLY)	91637	MFF1816G35R70F
A69A3R2026	-----					
A69A3R2027	321-0143-00	B030000	B031129	RES.,FXD,FILM:301 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G301R0F
A69A3R2027	-----					
A69A3R2027	321-0114-00	B031130		RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A69A3R2027	-----					
A69A3R2027	321-0143-00	B030000	B031113	RES.,FXD,FILM:301 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G301R0F
A69A3R2027	-----					
A69A3R2027	321-0114-00	B031114		RES.,FXD,FILM:150 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G150R0F
A69A3R2027	-----					
A69A3R2028	321-0143-00	B030000	B031129	RES.,FXD,FILM:301 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G301R0F
A69A3R2028	-----					
A69A3R2028	321-0114-00	B031130		RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A69A3R2028	-----					
A69A3R2028	321-0143-00	B030000	B031113	RES.,FXD,FILM:301 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G301R0F
A69A3R2028	-----					
A69A3R2028	321-0114-00	B031114		RES.,FXD,FILM:150 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G150R0F
A69A3R2028	-----					
A69A3R2049	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R2050	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A3R2055	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R2056	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3014	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3015	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3016	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R3017	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R3018	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R3019	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3020	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R3050	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R3053	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R3056	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R3057	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3059	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R3060	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R3061	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R3063	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4012	304-0681-00			RES.,FXD,CMPSN:680 OHM,10%,1W	01121	GB6811
A69A3R4015	321-0054-00	B030000	B031129	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492 ONLY)	91637	MFF1816G35R70F
A69A3R4015	-----					
A69A3R4015	321-0099-00	B031130		RES.,FXD,FILM:105 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G105R0F
A69A3R4015	-----					
A69A3R4015	321-0054-00	B030000	B031113	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492P ONLY)	91637	MFF1816G35R70F
A69A3R4015	-----					
A69A3R4015	321-0099-00	B031114		RES.,FXD,FILM:105 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G105R0F
A69A3R4015	-----					
A69A3R4016	321-0114-00	B030000	B031129	RES.,FXD,FILM:150 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G150R0F
A69A3R4016	-----					
A69A3R4016	321-0099-00	B031130		RES.,FXD,FILM:105 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G105R0F
A69A3R4016	-----					
A69A3R4016	321-0114-00	B030000	B031113	RES.,FXD,FILM:150 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G150R0F
A69A3R4016	-----					
A69A3R4016	321-0099-00	B031114		RES.,FXD,FILM:105 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G105R0F
A69A3R4016	-----					
A69A3R4017	321-0054-00	B030000	B031129	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492 ONLY)	91637	MFF1816G35R70F
A69A3R4017	-----					
A69A3R4017	321-0077-00	B031130		RES.,FXD,FILM:61.9 OHM,1%,0.125W (492 ONLY)	91637	MFF1816G61R90F
A69A3R4017	-----					
A69A3R4017	321-0054-00	B030000	B031113	RES.,FXD,FILM:35.7 OHM,5%,0.125W (492P ONLY)	91637	MFF1816G35R70F
A69A3R4017	-----					
A69A3R4017	321-0077-00	B031114		RES.,FXD,FILM:61.9 OHM,1%,0.125W (492P ONLY)	91637	MFF1816G61R90F
A69A3R4017	-----					
A69A3R4019	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R4020	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4021	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4048	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4049	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4050	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4053	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A69A3R4054	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3R4055	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R4056	315-0121-00			RES.,FXD,CMPSN:120 OHM,5%,0.25W	01121	CB1215
A69A3R4057	315-0332-00			RES.,FXD,CMPSN:3.3K OHM,5%,0.25W	01121	CB3325
A69A3T1025	120-1241-00			TRANSFORMER,RF:TOROID,3 WINDS TRIFILAR	80009	120-1241-00

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A69A3T1039	120-1241-00			TRANSFORMER,RF:TOROID,3 WINDS TRIFILAR	80009	120-1241-00
A69A3T2035	120-1237-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1237-00
A69A3T2055	120-1237-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1237-00
A69A3T3026	120-1339-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1339-00
A69A3T3055	120-1339-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1339-00
A69A3U4035	156-1235-00			MICROCIRCUIT,DI:BCD TO DECIMAL DECODER/DR	80009	156-1235-00
	-----			(41030,41045,42036,42043,43046		
	-----			NOT INCLUDED WITH THIS CKT BRD SEE		
	-----			CHASSIS PARTS FOR REPLACEABLE PART		
	-----			NUMBERS)		
A69A4	670-5531-02	B030000	B042199	CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-02
A69A4	670-5531-03	B042200	B042329	CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-03
A69A4	670-5531-04	B042330		CKT BOARD ASSY:10DB GAIN STEPS	80009	670-5531-04
A69A4C1017	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C1024	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C1028	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A69A4C1039	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C1047	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C1057	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C1066	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C2013	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C2018	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C2020	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C2032	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C2046	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C2052	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C2055	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C2059	283-0107-00			CAP.,FXD,CER DI:51PF,5%,200V	96733	R3017
A69A4C3042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C3045	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A4C3046	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4024	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4028	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4046	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4054	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4059	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4C4064	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A4CR1053	152-0524-00			SEMICONV DEVICE:SILICON,100V,100MA	80009	152-0524-00
A69A4Q1036	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q2015	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A4Q2027	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q2043	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q2056	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q3016	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q3049	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A69A4Q3055	151-0282-00			TRANSISTOR:SILICON,NPN	80009	151-0282-00
A69A4Q3064	151-0650-00			TRANSISTOR:SILICON,NPN	80009	151-0650-00
A69A4Q3099	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A69A4Q4039	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A4R1016	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A69A4R1022	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A69A4R1026	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A69A4R1031	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A4R1032	315-0390-00			RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A69A4R1041	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A69A4R1046	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A69A4R1050	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A69A4R1056	321-0058-00			RES.,FXD,FILM:39.2 OHM,1%,0.125W	91637	MFF1816G39R20F
A69A4R1060	321-0194-00			RES.,FXD,FILM:1.02K OHM,1%,0.125W	91637	MFF1816G10200F
A69A4R1062	321-0164-00			RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A69A4R1064	321-0065-00			RES.,FXD,FILM:46.4 OHM,1%,0.125W	91637	MFF1816G46R40F
A69A4R2011	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A69A4R2012	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A69A4R2018	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A69A4R2023	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A69A4R2025	311-0622-00	B030000	B042199	RES.,VAR, NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A69A4R2025	311-0635-00	B042200		RES.,VAR, NONWIR:1K OHM,10%,0.5% 0.5W	73138	82P-6-2-102K
A69A4R2031	321-0109-00	B030000	B042199	RES.,FXD,FILM:133 OHM,1%,0.125W	91637	MFF1816G133R0F
A69A4R2031	321-0194-00	B042200		RES.,FXD,FILM:1.02K OHM,1%,0.125W	91637	MFF1816G10200F
A69A4R2034	321-0164-00			RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A69A4R2035	321-0065-00			RES.,FXD,FILM:46.4 OHM,1%,0.125W	91637	MFF1816G46R40F
A69A4R2039	321-0130-00			RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A4R2042	315-0390-00			RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A69A4R2048	321-0097-00			RES.,FXD,FILM:100 OHM,1%,0.125W	91637	MFF1816G100R0F
A69A4R2051	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A69A4R2053	315-0152-00			RES.,FXD,CMPSN:1.5K OHM,5%,0.25W	01121	CB1525
A69A4R2057	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A69A4R2063	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A4R2069	301-0201-00			RES.,FXD,CMPSN:200 OHM,5%,0.50W	01121	EB2015
A69A4R3014	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A69A4R3015	315-0390-00			RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A69A4R3022	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A69A4R3026	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A69A4R3029	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A69A4R3035	311-0622-00			RES.,VAR, NONWIR:100 OHM,10% 0.50W	32997	3329H-G48-101
A69A4R3038	321-0026-00			RES.,FXD,FILM:18.2 OHM,1%,0.125W	91637	MFF1816G18R20F
A69A4R3039	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A69A4R3044	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A4R3048	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A69A4R3050	321-0130-00	B030000	B042329	RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A4R3050	321-0143-00	B042330		RES.,FXD,FILM:301 OHM,1%,0.125W	91637	MFF1816G301R0F
A69A4R3052	315-0390-00			RES.,FXD,CMPSN:39 OHM,5%,0.25W	01121	CB3905
A69A4R3059	315-0681-00			RES.,FXD,CMPSN:680 OHM,5%,0.25W	01121	CB6815
A69A4R4013	321-0130-00	B030000	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A4R4013	321-0160-00	B042200		RES.,FXD,FILM:453 OHM,1%,0.125W	91637	MFF1816G453R0F
A69A4R4026	315-0151-00			RES.,FXD,CMPSN:150 OHM,5%,0.25W	01121	CB1515
A69A4R4030	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A69A4R4033	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A69A4R4035	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A69A4R4045	321-0130-00	B030000	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A4R4045	321-0164-00	B042200	B042329	RES.,FXD,FILM:499 OHM,1%,0.125W	91637	MFF1816G499R0F
A69A4R3045	321-0143-00	B042330		RES.,FXD,FILM:301 OHM,1%,0.125W	91637	MFF1816G301R0F
A69A4R4049	315-0471-00	B030000	B042199	RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A69A4R4049	315-0221-00	B042200		RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A69A4R4052	315-0181-00			RES.,FXD,CMPSN:180 OHM,5%,0.25W	01121	CB1815

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A4R4056	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A69A4R4057	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A69A4R4061	315-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A69A4R4062	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A69A4R4066	315-0220-00			RES.,FXD,CMPSN:22 OHM,5%,0.25W	01121	CB2205
A69A4T4019	120-0902-00	B030000	B042199	XFMR,TOROID:5 TURNS,BIFILAR	80009	120-0902-00
A69A4T4019	120-1431-00	B042200		XFMR,RF:TOROID 2 WINDINGS	80009	120-1431-00
A69A5	670-5532-02	B030000	B042199	CKT BOARD ASSY:20DB GAIN STEPS	80009	670-5532-02
A69A5	670-5532-03	B042200		CKT BOARD ASSY:20DB GAIN STEPS	80009	670-5532-03
A69A5C1018	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1019	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1022	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1026	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1031	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1041	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A5C1042	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C1045	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A69A5C2023	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2032	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2042	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2051	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2053	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2059	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2061	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5C2069	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A69A5Q1025	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A69A5Q1043	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A69A5Q1035	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A69A5Q1062	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A5Q2018	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A5Q2042	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A69A5R1015	321-0175-00			RES.,FXD,FILM:649 OHM,1%,0.125W	91637	MFF1816G649R0F
A69A5R1019	317-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A69A5R1024	321-0130-00			RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A5R1025	317-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A69A5R1026	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A69A5R1032	321-0026-00			RES.,FXD,FILM:18.2 OHM,1%,0.125W	91637	MFF1816G18R20F
A69A5R1037	321-0130-00	B030000	B042199	RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A5R1037	321-0143-00	B042200		RES.,FXD,FILM:301 OHM,1%,0.125W	91637	MFF1816G301R0F
A69A5R1038	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A69A5R1041	317-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A69A5R1042	321-0130-00			RES.,FXD,FILM:221 OHM,1%,0.125W	91637	MFF1816G221R0F
A69A5R1045	317-0331-00			RES.,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A69A5R1049	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A5R1056	317-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A69A5R1064	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A5R1065	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A69A5R2014	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A69A5R2019	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A69A5R2021	317-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A69A5R2022	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A69A5R2023	311-0622-00			RES.,VAR,NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A69A5R2026	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A5R2025	311-0622-00			RES.,VAR,NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A69A5R2031	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A69A5R2039	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A69A5R2044	321-0114-00			RES.,FXD,FILM:150 OHM,1%,0.125W	91637	MFF1816G150R0F
A69A5R2045	321-0085-00			RES.,FXD,FILM:75 OHM,1%,0.125W	91637	MFF1816G75R00F
A69A5R2046	317-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.125W	01121	BB1045
A69A5R2051	315-0182-00	B030000	B042199	RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825
A69A5R2051	315-0102-00	B042200		RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A69A5R2052	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A69A5R2060	311-0622-00			RES.,VAR,NONWIR:100 OHM,10%,0.50W	32997	3329H-G48-101
A69A5R2061	321-0097-00			RES.,FXD,FILM:100 OHM,1%,0.125W	91637	MFF1816G100R0F
A69A5R2062	321-0026-00			RES.,FXD,FILM:18.2 OHM,1%,0.125W	91637	MFF1816G18R20F
A69A5R2063	317-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A70	670-5557-01	B030000	B041949	CKT BOARD ASSY:Z AXIS	80009	670-5557-01
A70	670-5557-02	B041950		CKT BOARD ASSY:Z AXIS	80009	670-5557-02
A70C1053	283-0068-00			CAP.,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C1054	283-0068-00			CAP.,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2023	283-0068-00			CAP.,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2024	285-0862-00			CAP.,FXD,PLSTC:0.001,10%,100V	56289	192P10292
A70C2050	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A70C2051	283-0317-00	B030000	B041949	CAP.,FXD,CER DI:1PF,+/-0.1PF,500V	72982	861-518-C0K0109B
A70C2052	283-0068-00	B030000	B041949	CAP.,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2053	283-0189-00			CAP.,FXD,CER DI:0.1UF,20%,400V	56289	5C40X5R104M400B
A70C2054	283-0068-00	B030000	B041949	CAP.,FXD,CER DI:0.01UF,+100-0%,500V	59660	871-533E103P
A70C2055	283-0189-00	B030000	B041949	CAP.,FXD,CER DI:0.1UF,20%,400V	56289	5C40X5R104M400B
A70C3015	281-0862-00			CAP.,FXD,CER DI:0.001UF,+80-20%,100V	20932	401-ES-100AD102Z
A70C3026	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A70C3053	281-0619-00			CAP.,FXD,CER DI:1.2PF,+/-0.1PF,200V	59660	374 018 C0K0129B
A70C4026	283-0203-00			CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A70CR1043	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR1045	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR2029	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR2056	152-0141-02	B030000	B041949	SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3016	152-0107-00			SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A70CR3017	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3018	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3022	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3023	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3024	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR3058	152-0107-00	B030000	B041949	SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A70CR3059	152-0107-03			SEMICONV DEVICE:SILICON,375V,400MA,SEL	01295	G727
A70CR3064	152-0107-00	B030000	B041949	SEMICONV DEVICE:SILICON,400V,400MA	12969	G727
A70CR3066	152-0107-03			SEMICONV DEVICE:SILICON,375V,400MA,SEL	01295	G727
A70CR4021	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70CR4022	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A70M1019	149-0046-01			METER,T TOTAL:500 HRS,55-700 VDC	80009	149-0046-01
A70Q1015	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A70Q1017	151-0391-00			TRANSISTOR:SILICON,PNP	80009	151-0391-00
A70Q1028	151-0301-00			TRANSISTOR:SILICON,PNP	27014	2N2907A
A70Q2022	151-0192-00			TRANSISTOR:SILICON,NPN,SEL FROM MPS652	04713	SPS8801
A70Q2025	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A70Q2042	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A70Q2044	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A70Q3024	151-0290-00			TRANSISTOR:SILICON,NPN	07263	S032790
A70Q3025	151-0134-00			TRANSISTOR:SILICON,PNP	80009	151-0134-00
A70Q3028	151-0391-00			TRANSISTOR:SILICON,PNP	80009	151-0391-00
A70Q3045	151-0302-00	B030000	B041949	TRANSISTOR:SILICON,NPN	07263	S038487
A70Q3047	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A70Q4058	151-0615-00			TRANSISTOR:SILICON,NPN	04713	SDS358K
A70Q4059	151-0612-00			TRANSISTOR:SILICON,PNP	80009	151-0612-00
A70Q4063	151-0615-00	B030000	B041949	TRANSISTOR:SILICON,NPN	04713	SDS358K
A70Q4065	151-0612-00	B030000	B041949	TRANSISTOR:SILICON,PNP	80009	151-0612-00
A70R1015	321-0481-00			RES.,FXD,FILM:1M OHM,1%,0.125W	24546	NA4D1004F
A70R1021	311-1198-00			RES.,VAR,NONWIR:20K OHM,20%,0.5W	73138	72-29-0
A70R1022	317-0244-00			RES.,FXD,CMPSN:240K OHM,5%,0.125W	01121	BB2445
A70R1023	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A70R1024	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A70R1025	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A70R1026	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A70R1027	311-1245-00			RES.,VAR,NONWIR:10K OHM,10%,0.50W	73138	72-28-0
A70R1030	311-1248-00			RES.,VAR,NONWIR:500 OHM,10%,0.50W	73138	72-23-0
A70R1045	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A70R1046	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%,0.25W	01121	CB2225
A70R1051	311-1247-00			RES.,VAR,NONWIR:1M OHM,10%,0.50W	73138	72-35-0
A70R1052	301-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.50W	01121	EB4735
A70R1058	311-1241-00			RES.,VAR,NONWIR:100K OHM,10%,0.5W	32997	3386X-T07-104
A70R1063	311-1242-00	B030000	B041949	RES.,VAR,NONWIR:200K OHM,10%,0.50W	02111	63X-204-T602
A70R1065	301-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.5W	01121	EB1045
A70R1066	301-0473-00			RES.,FXD,CMPSN:47K OHM,5%,0.50W	01121	EB4735
A70R1067	311-1243-00	B030000	B041949	RES.,VAR,NONWIR:500K OHM,10%,0.50W	73138	72-34-0
A70R1068	315-0104-00	B030000	B041949	RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A70R1069	315-0513-00	B030000	B041949	RES.,FXD,CMPSN:51K OHM,5%,0.25W	01121	CB5135
A70R2021	317-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A70R2022	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A70R2024	321-0275-00			RES.,FXD,FILM:7.15K OHM,1%,0.125W	91637	MFF1816G71500F
A70R2025	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R2026	315-0682-00			RES.,FXD,CMPSN:6.8K OHM,5%,0.25W	01121	CB6825
A70R2027	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R2028	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R2051	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A70R2052	315-0102-00	B030000	B041949	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R2053	315-0102-00	B030000	B041949	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R2054	315-0221-00			RES.,FXD,CMPSN:220 OHM,5%,0.25W	01121	CB2215
A70R2055	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R2056	315-0242-00	B030000	B041949	RES.,FXD,CMPSN:2.4K OHM,5%,0.25W	01121	CB2425
A70R2057	301-0753-00			RES.,FXD,CMPSN:75K OHM,5%,0.50W	01121	EB7535
A70R2058	315-0184-00	B030000	B041949	RES.,FXD,CMPSN:180K OHM,5%,0.25W	01121	CB1845
A70R2061	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A70R2062	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A70R2063	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A70R2064	315-0471-00			RES.,FXD,CMPSN:470 OHM,5%,0.25W	01121	CB4715
A70R2065	315-0100-00	B030000	B041949	RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A70R2066	315-0102-00	B030000	B041949	RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R2067	315-0392-00	B030000	B041949	RES.,FXD,CMPSN:3.9K OHM,5%,0.25W	01121	CB3925
A70R3011	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R3012	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R3013	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A70R3014	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R3015	321-0460-00			RES.,FXD,FILM:604K OHM,1%,0.125W	91637	MFF1816G60402F
A70R3016	315-0123-00			RES.,FXD,CMPSN:12K OHM,5%,0.25W	01121	CB1235
A70R3037	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A70R3045	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A70R3046	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A70R3047	315-0100-00	B030000	B041949	RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A70R3052	315-0563-00			RES.,FXD,CMPSN:56K OHM,5%,0.25W	01121	CB5635
A70R4011	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A70R4012	321-0356-00			RES.,FXD,FILM:49.9K OHM,1%,0.125W	91637	MFF1816G49901F
A70U2034	156-0733-02			MICROCIRCUIT,DI:DUAL MONOSTABLE MV,SCRN	04713	SN74LS21N/J
A70U2036	156-0385-02			MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A70U2038	156-0467-02			MICROCIRCUIT,DI:QUAD 2-INP NAND BFR,SCRN	01295	SN74LS38

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
A70U2039	156-0452-02		MICROCIRCUIT,DI:4-WIDE,2-INP AOI,SCREENED	07263	74LS54
A70U2045	156-0469-02		MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A70U3029	156-0206-02		MICROCIRCUIT,DI:CORE DRIVER,SCREENED	01295	SN75325(NP3 OR J
A70U3034	156-0206-02		MICROCIRCUIT,DI:CORE DRIVER,SCREENED	01295	SN75325(NP3 OR J
A70U3038	156-0206-02		MICROCIRCUIT,DI:CORE DRIVER,SCREENED	01295	SN75325(NP3 OR J
A70U3046	156-0913-02		MICROCIRCUIT,DI:OCTAL D FF,BURN-IN	04713	SN74LS377NDS
A70U4023	156-0067-12		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	01295	UA741CJG
A70VR1052	152-0288-00		SEMICONV DEVICE:ZENER,0.4W,140V,5%	12954	DZ720717C
A70VR2014	152-0265-00		SEMICONV DEVICE:ZENER,0.4W,24V,5%	04713	SZG35009K8
A70VR2062	152-0087-00		SEMICONV DEVICE:ZENER,1W,100V,5%	04713	SZ1627RL
A70VR3015	152-0281-00		SEMICONV DEVICE:ZENER,0.4W,22V,5%	12954	1N969B

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A72	670-5549-01	B030000	B042579	CKT BOARD ASSY:SWEEP	80009	670-5549-01
A72	670-5549-02	B042580		CKT BOARD ASSY:: SWEEP	80009	670-5549-02
A72C1013	283-0110-00			CAP.,FXD,CER DI:0.005UF,+80-20%,150V	59660	855-547-E-502Z
A72C1032	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C1033	283-0177-00			CAP.,FXD,CER DI:1UF,+80-20%.25V	56289	2C20Z5U105Z025B
A72C1038	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C1083	283-0108-00			CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A72C2042	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C2067	283-0004-00			CAP.,FXD,CER DI:0.02UF,+80-20%,150V	59821	SDDH69J203Z
A72C2085	283-0212-00			CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A72C2094	295-0171-00			CAP.,SET,MTCHD:510PF,0.05UF,5UF	84411	TEK-140-000-51
A72C2098	295-0171-00			CAP.,SET,MTCHD:510PF,0.05UF,5UF	84411	TEK-140-000-51
A72C3027	283-0203-00	B030000	B042579	CAP.,FXD,CER DI:0.47UF,20%,50V	72982	8131M058Z5U0474M
A72C3027	283-0212-00	B042580		CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A72C3028	290-0536-00			CAP.,FXD,ELCTL:100UF,20%,25V	90201	TDC106M025FL
A72C3069	290-0755-00			CAP.,FXD,ELCTL:100UF,+50-10%,10V	55680	ULA1A01TEA
A72C3071	283-0108-00			CAP.,FXD,CER DI:220PF,10%,200V	56289	1C10C0G221K200B
A72C3075	283-0212-00			CAP.,FXD,CER DI:2UF,20%,50V	51642	400-050-Z5U205M
A72C3079	295-0171-00			CAP.,SET,MTCHD:510PF,0.05UF,5UF	84411	TEK-140-000-51
A72C4059	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C4069	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C4082	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C4084	290-0768-00			CAP.,FXD,ELCTL:100UF,+50-10%,100V	54473	ECE-A100V10L
A72C4087	290-0574-00			CAP.,FXD,ELCTL:47UF,10%,20V	90201	TDC476K020CL
A72C4091	283-0094-00			CAP.,FXD,CER DI:27PF,10%,200V	59660	835-583-C0G0270K
A72C4109	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C5024	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C5044	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C5058	283-0168-00			CAP.,FXD,CER DI:12PF,5%,100V	72982	8101B121C0G0120J
A72C5059	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C5061	283-0204-00			CAP.,FXD,CER DI:0.01UF,20%,50V	96733	R2676
A72C5078	283-0004-00			CAP.,FXD,CER DI:0.02UF,+80-20%,150V	59821	SDDH69J203Z
A72C5091	290-0309-00			CAP.,FXD,ELCTL:100UF,20%,25V	56289	109D107X0025F2
A72C6061	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C6062	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72C6071	283-0330-00			CAP.,FXD,CER DI:100PF,5%,50V	51642	200-050-NP0-101J
A72C6072	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A72C6083	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%,50V	56289	1C10Z5U223M050B
A72C7092	283-0111-00			CAP.,FXD,CER DI:0.1UF,20%,50V	56289	273C11
A72CR1035	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72CR1088	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72CR1089	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72CR2075	152-0322-00			SEMICONV DEVICE:SILICON,15V,HOT CARRIER	50434	5082-2672
A72CR2086	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72CR2101	152-0246-00			SEMICONV DEVICE:SW,SI,40V,200MA	03508	DE140
A72CR2102	152-0246-00			SEMICONV DEVICE:SW,SI,40V,200MA	03508	DE140
A72CR3034	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72CR3035	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A72L4065	108-0417-01			COIL,RF:FIXED,110UH	80009	108-0417-01
A72Q1078	151-0232-00			TRANSISTOR:SILICON,NPN,DUAL	07263	SP12141
A72Q2074	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A72Q1047	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A72Q2084	151-0232-00			TRANSISTOR:SILICON,NPN,DUAL	07263	SP12141

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A72Q2107	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A72Q3090	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A72Q3095	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A72Q3100	151-1022-00			TRANSISTOR:FET,N-CHAN,SI,F1782,T0-18	17856	FN1234
A72Q4051	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A72Q4052	151-0302-00			TRANSISTOR:SILICON,NPN	07263	S038487
A72R1011	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R1012	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R1018	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R1019	315-0153-00			RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A72R1028	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R1029	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R1034	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R1035	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A72R1036	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A72R1043	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R1073	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R1082	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A72R1084	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A72R1085	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R2012	321-0259-00			RES.,FXD,FILM:4.87K OHM,1%,0.125W	91637	MFF1816G48700F
A72R2013	321-0163-00			RES.,FXD,FILM:487 OHM,1%,0.125W	91637	MFF1816G487R0F
A72R2062	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%,0.25W	01121	CB1025
A72R2066	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R2077	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A72R2078	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A72R2081	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R2082	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R2083	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A72R2092	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R2093	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R2099	315-0821-00			RES.,FXD,CMPSN:820 OHM,5%,0.25W	01121	CB8215
A72R2105	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R3011	315-0106-00			RES.,FXD,CMPSN:10M OHM,5%,0.25W	01121	CB1065
A72R3012	315-0153-00			RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A72R3013	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R3016	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%,0.25W	01121	CB1055
A72R3017	321-0256-00			RES.,FXD,FILM:4.53K OHM,1%,0.125W	91637	MFF1816G45300F
A72R3022	315-0153-00			RES.,FXD,CMPSN:15K OHM,5%,0.25W	01121	CB1535
A72R3023	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R3025	315-0391-00			RES.,FXD,CMPSN:390 OHM,5%,0.25W	01121	CB3915
A72R3027	315-0104-00			RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R3082	315-0302-00			RES.,FXD,CMPSN:3K OHM,5%,0.25W	01121	CB3025
A72R3086	315-0103-00			RES.,FXD,CMPSN:10K OHM,5%,0.25W	01121	CB1035
A72R3087	315-0100-00			RES.,FXD,CMPSN:10 OHM,5%,0.25W	01121	CB1005
A72R3103	315-0104-00	B030000	B042579	RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
A72R3103	321-0431-00	B042580		RES.,FXD,FILM:301K OHM,1%,0.125W	91637	MFF1816G30102F
A72R3104	315-0511-00			RES.,FXD,CMPSN:510 OHM,5%,0.25W	01121	CB5115
A72R3105	321-0317-00	B030000	B042579	RES.,FXD,FILM:19.6K OHM,1%,0.125W	91637	MFF1816G19601F
A72R3105	321-0384-00	B042580		RES.,FXD,FILM:97.6K OHM,1%,0.125W	91637	MFF1816G97601F
A72R3106	315-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%,0.25W	01121	CB4725
A72R4051	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A72R4052	315-0182-00			RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825
A72R4057	315-0182-00			RES.,FXD,CMPSN:1.8K OHM,5%,0.25W	01121	CB1825

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A72R4058	315-0272-00			RES.,FXD,CMPSN:2.7K OHM,5%,0.25W	01121	CB2725
A72R4091	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A72R4098	321-0233-00	B030000	B042579	RES.,FXD,FILM:2.61K OHM,1%,0.125W	91637	MFF1816G26100F
A72R4098	321-0307-00	B042580		RES.,FXD,FILM:15.4K OHM,1%,0.125W	91637	MFF1816G15401F
A72R4105	321-0393-00			RES.,FXD,FILM:121K OHM,1%,0.125W	91637	MFF1816G12102F
A72R5064	321-0258-00			RES.,FXD,FILM:4.75K OHM,1%,0.125W	91637	MFF1816G47500F
A72R5065	321-0258-00			RES.,FXD,FILM:4.75K OHM,1%,0.125W	91637	MFF1816G47500F
A72R5074	315-0200-00			RES.,FXD,CMPSN:20 OHM,5%,0.25W	01121	CB2005
A72R5081	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R5091	315-0122-00			RES.,FXD,CMPSN:1.2K OHM,5%,0.25W	01121	CB1225
A72R5092	321-0318-07			RES.,FXD,FILM:20K OHM,0.1%,0.125W	24546	NE55E2002B
A72R5094	321-0816-07			RES.,FXD,FILM:5K OHM 0.1%,0.125W	91637	MFF1816C50000B
A72R5102	321-0995-00			RES.,FXD,FILM:549K OHM,1%,0.125W	24546	NA55D5493F
A72R5103	321-1388-01			RES.,FXD,FILM:109K OHM,0.5%,0.125W	24546	NA55D1093D
A72R5104	321-0427-00			RES.,FXD,FILM:274K OHM,1%,0.125W	24546	NA55D2743F
A72R5105	311-1240-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	72-30-0
A72R5151	311-1240-00			RES.,VAR,NONWIR:25K OHM,10%,0.50W	73138	72-30-0
A72R6052	321-0310-00			RES.,FXD,FILM:16.5K OHM,1%,0.125W	91637	MFF1816G16501F
A72R6058	315-0752-00			RES.,FXD,CMPSN:7.5K OHM,5%,0.25W	01121	CB7525
A72R6059	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A72R6066	315-0470-00			RES.,FXD,CMPSN:47 OHM,5%,0.25W	01121	CB4705
A72R6067	315-0562-00			RES.,FXD,CMPSN:5.6K OHM,5%,0.25W	01121	CB5625
A72R6071	321-0301-00			RES.,FXD,FILM:13.3K OHM,1%,0.125W	91637	MFF1816G13301F
A72R6072	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R6081	315-0183-00			RES.,FXD,CMPSN:18K OHM,5%,0.25W	01121	CB1835
A72R6082	315-0822-00			RES.,FXD,CMPSN:8.2K OHM,5%,0.25W	01121	CB8225
A72R6083	315-0101-00			RES.,FXD,CMPSN:100 OHM,5%,0.25W	01121	CB1015
A72R6086	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A72R6091	321-0318-00			RES.,FXD,FILM:20K OHM,1%,0.125W	91637	MFF1816G20001F
A72R6092	321-0289-00			RES.,FXD,FILM:10K OHM,1%,0.125W	91637	MFF1816G10001F
A72R6094	321-0983-00			RES.,FXD,FILM:4.5M OHM,1%,0.125W	91637	CM110216G45003F
A72R6095	321-1627-06			RES.,FXD,FILM:731.3K OHM,0.25%,0.125W	91637	MFF1816G73132C
A72R6101	321-0280-00			RES.,FXD,FILM:8.06K OHM,1%,0.125W	91637	MFF1816G80600F
A72R6102	321-0352-00			RES.,FXD,FILM:45.3K OHM,1%,0.125W	91637	MFF1816G45301F
A72R6103	321-0807-00			RES.,FXD,FILM:900K OHM,1%,0.125W	91637	HFF1104F90002F
A72R6104	321-0510-07			RES.,FXD,FILM:2.00 MEG OHM,0.125W	91637	HFF1813C20003B
A72R7091	321-0244-00	B030000	B042579	RES.,FXD,FILM:3.4K OHM,1%,0.125W	91637	MFF1816G34000F
A72R7091	321-0321-00	B042580		RES.,FXD,FILM:21.5K OHM,1%,0.125W	91637	MFF1816G21501F
A72R7093	321-0274-00	B030000	B042579	RES.,FXD,FILM:6.98K OHM,1%,0.125W	91637	MFF1816G69800F
A72R7093	321-0350-00	B042580		RES.,FXD,FILM:43.2K OHM,1%,0.125W	91637	MFF1816G43201F
A72R7101	321-1484-03			RES.,FXD,FILM:1.09M OHM,0.25%,0.125W	91637	HFF188D10903C
A72R7102	321-0291-00	B030000	B042579	RES.,FXD,FILM:10.5K OHM,1%,0.125W	91637	MFF1816G10501F
A72R7102	321-0367-00	B042580		RES.,FXD,FILM:64.9K OHM,1%,0.125W	91637	MFF1816G64901F
A72R7103	321-0274-00	B030000	B042579	RES.,FXD,FILM:6.98K OHM,1%,0.125W	91637	MFF1816G69800F
A72R7103	321-0350-00	B042580		RES.,FXD,FILM:43.2K OHM,1%,0.125W	91637	MFF1816G43201F
A72U1052	156-0385-02			MICROCIRCUIT,DI:HEX INVERTER	01295	SN74LS04
A72U2015	156-0411-00			MICROCIRCUIT,LI:QUAD-COMP,SGL SUPPLY	27014	LM339N
A72U2024	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A72U2034	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A72U2043	156-0391-02			MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A72U3034	156-0798-02			MICROCIRCUIT,DI:DUAL 14 TO 1 LINE SEL/MUX	01295	SN74LS153
A72U3042	156-0391-02			MICROCIRCUIT,DI:HEX LATCH W/CLEAR	01295	SN74LS174
A72U3061	156-0382-02			MICROCIRCUIT,DI:QUAD 2-1NP NAND GATE	01295	SN74LS00
A72U4016	156-0383-02			MICROCIRCUIT,DI:QUAD 2-1NP NOR GATE	01295	SN74LS02

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A72U4026	156-0153-02			MICROCIRCUIT,DI:HEX INVERTER BUFFER	27014	DM8006
A72U4095	156-1249-00			MICROCIRCUIT,LI:VOLTAGE REFERENCE	24355	AD40227
A72U4101	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A72U4101	-----			(492 ONLY)		
A72U4101	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A72U4101	-----			(492 ONLY)		
A72U4101	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A72U4101	-----			(492P ONLY)		
A72U4101	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A72U4101	-----			(492P ONLY)		
A72U5016	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A72U5026	156-0388-03			MICROCIRCUIT,DI:DUAL D FLIP-FLOP	07263	74LS74A
A72U5033	156-0956-02			MICROCIRCUIT,DI:OCTAL BFR W/3 STATE OUT	01295	SN74LS244NP3
A72U5043	156-0469-02			MICROCIRCUIT,DI:3/8 LINE DCDR	01295	SN74LS138NP3
A72U5052	156-0382-02			MICROCIRCUIT,DI:QUAD 2-INP NAND GATE	01295	SN74LS00
A72U5085	156-0411-00			MICROCIRCUIT,LI:QUAD-COMP,SGL SUPPLY	27014	LM339N
A72U6061	156-0742-02			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	01295	LM318JG
A72U6071	156-0512-02	B030000	B041473	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A72U6071	-----			(492 ONLY)		
A72U6071	156-0512-03	B041474		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A72U6071	-----			(492 ONLY)		
A72U6071	156-0512-02	B030000	B041669	MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER,SEL	04713	LM308J-8DS
A72U6071	-----			(492P ONLY)		
A72U6071	156-0512-03	B041670		MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	04713	LM308J-8
A72U6071	-----			(492P ONLY)		
A72U6092	156-0158-04			MICROCIRCUIT,LI:DUAL OPERATIONAL AMPLIFIER	01295	N99320JG
A72U6102	156-1270-00			MICROCIRCUIT,LI:8 CHAN ANALOG MULTIPLEXER	27014	LF11508D
A72VR2093	152-0611-00			SEMICONV DEVICE:ZENER,0.4W,9V,2%	80009	152-0611-00
A72VR2103	152-0437-00			SEMICONV DEVICE:ZENER,SI,8.2V,2%,0.4W	14552	TD332679
A72VR3106	152-0437-00			SEMICONV DEVICE:ZENER,SI,8.2V,2%,0.4W	14552	TD332679
A72VR6086	152-0127-00			SEMICONV DEVICE:ZENER,0.4W,7.5V,5%	04713	SZG35009K2
A72W1028	131-0993-00			BUS,CONDUCTOR:2 WIRE BLACK	00779	850100-01
A72W3011	131-0993-00			BUS,CONDUCTOR:2 WIRE BLACK	00779	850100-01
A72W4105	131-0993-00			BUS,CONDUCTOR:2 WIRE BLACK	00779	850100-01

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
A74	670-5559-00	B030000	B040219	CKT BOARD ASSY:HIGH VOLTAGE	80009	670-5559-00
A74	670-5559-01	B040220	B042289	CKT BOARD ASSY:HIGH VOLTAGE	80009	670-5559-01
A74	670-5559-03	B042290		CKT BOARD ASSY:HIGH VOLTAGE	80009	670-5559-03
A74C1038	283-0177-00			CAP.,FXD,CER DI:1UF,+ 80-20%.25V	56289	2C20Z5U105Z025B
A74C1043	283-0208-00			CAP.,FXD,CER DI:0.22UF,10%.200V	72982	8151N230 C 224K
A74C1058	283-0615-00	B030000	B040219	CAP.,FXD,MICA D:33PF,5%.500V	00853	D155E330J0
A74C1058	283-0728-00	B040220		CAP.,FXD,MICA D:120PF,1%.500V	00853	D155F121F0
A74C2084	290-0414-00			CAP.,FXD,ELCTLT:8UF,+ 50-10%.200V	90201	TT8ROT200C1C3P
A74C3067	283-0615-00	B030000	B040219	CAP.,FXD,MICA D:33PF,5%.500V	00853	D155E330J0
A74C3073	283-0197-00			CAP.,FXD,CER DI:470PF,5%.100V	72982	8121N075C0G0471J
A74C3076	283-0005-00	B030000	B042289	CAP.,FXD,CER DI:0.01UF,+ 100-0%.250V	72982	8131N300Z5U0103P
A74C3076	283-0220-00	B042290		CAP.,FXD,CER DI:0.01UF,20%.50V	72982	8121N075X7R0103M
A74C3086	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%.50V	56289	1C10Z5U223M050B
A74C3088	283-0198-00			CAP.,FXD,CER DI:0.22UF,20%.50V	56289	1C10Z5U223M050B
A74C4072	283-0210-00			CAP.,FXD,CER DI:0.0056UF,20%.50V	72982	8131N145W5R562M
A74CR1044	152-0107-03			SEMICONV DEVICE:SILICON,375V,400MA,SEL	01295	G727
A74CR1046	152-0242-00			SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR1047	152-0141-02	B040220		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74CR1048	152-0141-02	B040220		SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74CR1049	152-0107-03			SEMICONV DEVICE:SILICON,375V,400MA,SEL	01295	G727
A74CR1056	152-0242-00			SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR1086	152-0400-00			SEMICONV DEVICE:SILICON,400V,1A	80009	152-0400-00
A74CR2044	152-0242-00			SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR2046	152-0242-00			SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR3077	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74CR4061	152-0242-00	B030000	B040219	SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR4062	152-0242-00	B030000	B040219	SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR4064	152-0242-00	B030000	B040219	SEMICONV DEVICE:SILICON,225V,200MA	07263	FDH5004
A74CR4071	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74CR4077	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74CR4078	152-0141-02			SEMICONV DEVICE:SILICON,30V,150MA	01295	1N4152R
A74J2084	131-2196-00			CONN,RCPT,ELEC:CKT BD.6/12,FEMALE	22526	650002-076
A74Q1073	151-0423-00			TRANSISTOR:SILICON,NPN	51984	NTC2333L
A74R1042	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A74R1043	301-0472-00			RES.,FXD,CMPSN:4.7K OHM,5%.0.50W	01121	EB4725
A74R1048	315-0224-00			RES.,FXD,CMPSN:220K OHM,5%.0.25W	01121	CB2245
A74R1051	315-0104-00	B030000	B040219	RES.,FXD,CMPSN:100K OHM,5%.0.25W	01121	CB1045
A74R1051	315-0334-00	B040220		RES.,FXD,CMPSN:330K OHM,5%.0.25W	01121	CB3345
A74R2012	308-0685-00			RES.,FXD,WW:1.5 OHM,5%.1W	75042	BW20-1R500J
A74R2040	311-1287-00	B040220		RES.,VAR,NONWIR:100K OHM,0.5W 0.50W	32997	3329W-158-104
A74R2050	315-0104-00	B040220		RES.,FXD,CMPSN:100K OHM,5%.0.25W	01121	CB1045
A74R3033	311-1968-00			RES.,VAR,NONWIR:PVL,5M OHM,20%.0.50W	01121	72M4N048S505M
A74R3071	315-0431-00			RES.,FXD,CMPSN:430 OHM,5%.0.25W	01121	CB4315
A74R3072	315-0512-00			RES.,FXD,CMPSN:5.1K OHM,5%.0.25W	01121	CB5125
A74R3074	315-0105-00			RES.,FXD,CMPSN:1M OHM,5%.0.25W	01121	CB1055
A74R3075	315-0222-00			RES.,FXD,CMPSN:2.2K OHM,5%.0.25W	01121	CB2225
A74R3078	315-0133-00			RES.,FXD,CMPSN:13K OHM,5%.0.25W	01121	CB1335
A74R3079	315-0184-00			RES.,FXD,CMPSN:180K OHM,5%.0.25W	01121	CB1845
A74R4038	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A74R4063	315-0203-00	B030000	B040219	RES.,FXD,CMPSN:20K OHM,5%.0.25W	01121	CB2035
A74R4065	315-0203-00	B030000	B040219	RES.,FXD,CMPSN:20K OHM,5%.0.25W	01121	CB2035
A74R4067	315-0474-00	B030000	B040219	RES.,FXD,CMPSN:470K OHM,5%.0.25W	01121	CB4745
A74R4074	315-0473-00			RES.,FXD,CMPSN:47K OHM,5%.0.25W	01121	CB4735

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
A74R4075	315-0102-00			RES.,FXD,CMPSN:1K OHM,5%.0.25W	01121	CB1025
A74T2065	120-1233-00			XFMR,PWR,SDN&SU:HIGH VOLTAGE	80009	120-1233-00
A74U4083	156-0067-12			MICROCIRCUIT,LI:OPERATIONAL AMPLIFIER	01295	UA741CJG
A74VR1041	152-0651-00	B030000	B040219	SEMICONV DEVICE:ZEN,SI,28V,5%,400MW	04713	SZG134
A74VR1041	152-0283-00	B040220		SEMICONV DEVICE:ZENER,0.4W,43V,5%	12954	DZ750903B1N976B
A74A1				CKT BOARD ASSY:HIGH VOLTAGE		
A74A1C1031	283-0033-00			CAP.,FXD,CER DI:0.001UF,+100-0%,6000V	59660	3906BW200E102P
A74A1C1041	283-0033-00			CAP.,FXD,CER DI:0.001UF,+100-0%,6000V	59660	3906BW200E102P
A74A1C1047	283-0427-00			CAP.,FXD,CER DI:25PF,10%,6KV	04222	5019-COG-250K6KV
A74A1C4024	285-0507-01			CAP.,FXD,PPR DI:0.0047UF,20%,6000V	56289	430P472060
A74A1C4027	285-1184-00			CAP.,FXD,MTLZD:0.01 UF,20%,4000V	84411	TEK-183103040
A74A1C5013	283-0033-00			CAP.,FXD,CER DI:0.001UF,+100-0%,6000V	59660	3906BW200E102P
A74A1C5021	285-0507-01			CAP.,FXD,PPR DI:0.0047UF,20%,6000V	56289	430P472060
A74A1CR4035	152-0639-00			SEMICONV DEVICE:RECT,SI,10KV,10MA	52306	CX345
A74A1CR4041	152-0639-00			SEMICONV DEVICE:RECT,SI,10KV,10MA	52306	CX345
A74A1DS2052	150-0111-00			LAMP,GLOW:NEON,1.2MA	53944	A1B-3
A74A1DS2057	150-0111-00			LAMP,GLOW:NEON,1.2MA	53944	A1B-3
A77	670-5746-00	B030000	B042069	CKT BOARD ASSY:CRT GRATICULE LIGHT	80009	670-5746-00
A77	670-5746-01	B042070		CKT BOARD ASSY:CRT GRATICULE LIGHT	80009	670-5746-01
A77DS1011	150-0029-00			LAMP,INCAND:6.3V,0.20A	08806	349
A77DS1013	150-0029-00			LAMP,INCAND:6.3V,0.20A	08806	349

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
CHASSIS PARTS					
C107	290-0745-00		CAP.,FXD,ELCTLT:22UF,+50-10%,25V	54473	ECE-A25V22L
C300	285-1192-00		CAP.,FXD,PPR DI:0.0022UF,20%,250VAC	000FG	PME271Y422
C302	285-1192-00		CAP.,FXD,PPR DI:0.0022UF,20%,250VAC	000FG	PME271Y422
C325	281-0165-00		CAP.,VAR,AIR DI:0.8-10PF,250V	73899	MVM-010W
C4042	283-0033-00		CAP.,FXD,CER DI:0.001UF,+100-0%,6000V	59660	3906BW200E102P
C5033	283-0033-00		CAP.,FXD,CER DI:0.001UF,+100-0%,6000V	59660	3906BW200E102P
E2105	276-0554-00		CORE,TOROID:0.187 ID X 0.375 OD	80009	276-0554-00
F301	159-0017-00		FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW	71400	MTH4
F301	159-0023-00		FUSE,CARTRIDGE:3AG,2A,250V,5 SEC	71400	MDX2
F301	-----		(OPTION A1,A2,A3,A4 ONLY)		
FL10	119-0294-01		FILTER,LOW PASS:DC TO 1.8GHZ	21377	OBD
FL10	-----		(OPTION 01 ONLY)		
FL11	015-1027-00		FILTER,LOW PASS:4.5 GHZ	80009	015-1027-00
FL12	119-1140-00		YIG TUNED FLTR:	80009	119-1140-00
FL12	-----		(OPTION 01 ONLY)		
FL15	015-1027-00		FILTER,LOW PASS:4.5 GHZ	80009	015-1027-00
FL16	119-1018-00		DIR FILTER ASSY:	80009	119-1018-00
FL36	119-1025-00		FILTER,BANDPASS:110MHZ	80009	119-1025-00
L301	108-0994-00		COIL,RF:FIXED,300UH TOROIDAL INDUCT	80009	108-0994-00
L302	108-0994-00		COIL,RF:FIXED,300UH TOROIDAL INDUCT	80009	108-0994-00
P110	015-1025-01		TERM.,COAX:3MM MALE,50 OHM,W/CH	18203	T186C5
P112	015-1025-01		TERM.,COAX:3MM MALE,50 OHM,W/CH	18203	T186C5
P133	015-1022-00		TERM. COAXIAL:50 OHM,0.5W,SMA	26805	T198CS
P144	015-1022-00		TERM. COAXIAL:50 OHM,0.5W,SMA	26805	T198CS
P145	015-1022-00		TERM. COAXIAL:50 OHM,0.5W,SMA	26805	T198CS
P164	015-1022-00		TERM. COAXIAL:50 OHM,0.5W,SMA	26805	T198CS
Q352	151-0415-00		TRANSISTOR:SILICON,NPN	04713	SJE419
Q565	151-0426-00		TRANSISTOR:SILICON,NPN	03508	X44H242
Q565	-----		(OPTION 01 ONLY)		
Q3052	151-0415-00		TRANSISTOR:SILICON,NPN	04713	SJE419
Q5065	151-0426-00		TRANSISTOR:SILICON,NPN	03508	X44H242
R107	307-0093-00		RES.,FXD,CMPSN:1.2 OHM,5%,0.50W	01121	EB12G5
R108	307-0093-00		RES.,FXD,CMPSN:1.2 OHM,5%,0.50W	01121	EB12G5
R301	301-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.50W	01121	EB1015
R302	301-0101-00		RES.,FXD,CMPSN:100 OHM,5%,0.50W	01121	EB1015
R1039	301-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
R1044	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
R1051	307-0601-00		RES NTWK,FXD FI:HIGH VOLTAGE DRIVER	80009	307-0601-00
R1053	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
R1057	315-0226-00		RES.,FXD,CMPSN:22M OHM,5%,0.25W	01121	CB2265
R2037	301-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
R2048	301-0102-00		RES.,FXD,CMPSN:1K OHM,5%,0.50W	01121	EB1025
R3035	315-0104-00		RES.,FXD,CMPSN:100K OHM,5%,0.25W	01121	CB1045
R3038	301-0512-00		RES.,FXD,CMPSN:5.1K OHM,5%,0.50W	01121	EB5125
R5046	315-0203-00		RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035

**Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)**

Component No.	Tektronix Part No.	Serial/Model No.		Name & Description	Mfr Code	Mfr Part Number
		Eff	Dscont			
R5048	315-0226-00			RES.,FXD,CMPSN:22M OHM,5%,0.25W	01121	CB2265
R5056	315-0203-00			RES.,FXD,CMPSN:20K OHM,5%,0.25W	01121	CB2035
S11	119-1161-00			SW,RF XMSN LINE:DC TO 18GHZ,60DB ISLN	50667	D3-412C3
S11	-----			(OPTION 01 ONLY)		
S12	119-1161-00			SW,RF XMSN LINE:DC TO 18GHZ,60DB ISLN	50667	D3-412C3
S12	-----			(OPTION 01 ONLY)		
S13	119-1161-00			SW,RF XMSN LINE:DC TO 18GHZ,60DB ISLN	50667	D3-412C3
S13	-----			(NOT INCLUDED IN OPTION 8)		
T107	120-1380-00			TRANSFORMER,RF:TOROID,2 WINDINGS	80009	120-1380-00
U1010	156-0285-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	27014	LM340T-12
U2010	156-0872-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	04713	MC7912C
U3041	156-0277-00			MICROCIRCUIT,LI:VOLTAGE REGULATOR	07263	MICROA7805UC
V100	154-0809-00			ELECTRON TUBE:CRT,P-GREEN D,INTERNAL	80009	154-0809-00
W100	175-2200-00			CABLE ASSY,RF:50 OHM COAX,3.497 INCH LONG	80009	175-2200-00
W100	175-2529-00			CABLE ASSY,RF:50 OHM COAX,8.27 INCH LONG	80009	175-2529-00
W100	-----			(OPTION 01 ONLY)		
W101	175-2183-00			CABLE ASSY,RF:50 OHM COAX,4.63 INCH LONG	80009	175-2183-00
W102	175-2534-00			CABLE ASSY,RF:50 OHM COAX,2.59 INCH LONG	80009	175-2534-00
W102	-----			(OPTION 01 ONLY)		
W104	175-2535-00			CABLE ASSY,RF:50 OHM COAX,7.01 INCH LONG	80009	175-2535-00
W104	-----			(OPTION 01 ONLY)		
W106	175-2533-00			CABLE ASSY,RF:50 OHM COAX,2.1 INCH LONG	80009	175-2533-00
W106	-----			(OPTION 01 ONLY)		
W110	175-2349-00			CABLE ASSY,RF:50 OHM COAX,2.34 INCH LONG	80009	175-2349-00
W112	175-2543-00			CABLE ASSY,RF:50 OHM COAX,1.51 INCH LONG	80009	175-2543-00
W112	-----			(OPTION 01 ONLY)		
W114	175-2530-00			CABLE ASSY,RF:50 OHM COAX,6.34 INCH LONG	80009	175-2530-00
W114	-----			(OPTION 01 ONLY)		
W116	175-2532-00			CABLE ASSY,RF:50 OHM COAX,4.09 INCH LONG	80009	175-2532-00
W116	-----			(OPTION 01 ONLY)		
W118	175-2761-00	B030000	B040288	CABLE ASSY,RF:50 OHM COAX,3.63 INCH LONG	80009	175-2761-00
W118	-----			(OPTION 03 ONLY)		
W118	175-2761-00	B040289		CABLE ASSY,RF:50 OHM COAX,3.63 INCH LONG	80009	175-2761-00
W118	-----			(NOT INCLUDED IN OPTION 02)		
W124	175-2542-00			CABLE ASSY,RF:50 OHM COAX,2.62 INCH LONG	80009	175-2542-00
W124	-----			(NOT INCLUDED IN OPTION 8)		
W125	175-3024-00			CABLE ASSY,RF:50 OHM COAX,6.89 INCH LONG	80009	175-3024-00
W125	-----			(OPTION 8 ONLY)		
W126	175-2531-00			CABLE ASSY,RF:50 OHM COAX,4.98 INCH LONG	80009	175-2531-00
W126	-----			(OPTION 01 ONLY)		
W130	175-2765-00	B030000	B042088	CABLE ASSY,RF:50 OHM COAX,17.4 INCH LONG	80009	175-2765-00
W130	-----			(OPTION 03 ONLY)		
W130	175-7332-00	B042089		CABLE ASSY,RF:50 OHM COAX,13.703 INCH LON	80009	175-7332-00
W130	-----			(OPTION 03 ONLY)		
W131	175-2345-00	B042089		CABLE ASSY,RF:50 OHM COAX,10.29 INCH LONG	80009	175-2345-00
W131	-----			(OPT 03 ONLY)		
W132	175-2762-00			CABLE ASSY,RF:50 OHM COAX,17.56 INCH LONG	80009	175-2762-00
W137	175-2760-00			CABLE ASSY,RF:50 OHM COAX,10.34 INCH LONG	80009	175-2760-00
W137	-----			(NOT INCLUDED IN OPTION 8)		

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff	Dscont	Name & Description	Mfr Code	Mfr Part Number
W138	175-2541-00			CABLE ASSY,RF:50 OHM COAX,3.18 INCH LONG	80009	175-2541-00
W138	-----			(NOT INCLUDED IN OPTION 8)		
W142	175-2338-00			CABLE ASSY,RF:50 OHM COAX,7.12 INCH LONG	80009	175-2338-00
W150	175-2339-00			CABLE ASSY,RF:50 OHM COAX,5.33 INCH LONG	80009	175-2339-00
W160	175-2340-00			CABLE ASSY,RF:50 OHM COAX,1.8 INCH LONG	80009	175-2340-00
W162	175-2337-00			CABLE ASSY,RF:50 OHM COAX,2.76 INCH LONG	80009	175-2337-00
W166	175-2763-00			CABLE ASSY,RF:50 OHM COAX,3.13 INCH LONG	80009	175-2763-00
W182	175-2406-00			CABLE ASSY,RF:50 OHM COAX,3.0 INCH LONG	80009	175-2406-00
W200	175-2350-00	B030000	B039999	CABLE ASSY,RF:50 OHM COAX,12.02 INCH LONG	80009	175-2350-00
W202	175-2198-00	B030000	B039999	CABLE ASSY,RF:50 OHM COAX,5.74 INCH LONG	80009	175-2198-00
W220	175-4542-00	B040000		CABLE ASSY,RF:50 OHM COAX,8.9 L,SEMIRIGID	80009	175-4542-00
W222	175-3849-00	B040000		CABLE ASSY,RF:50 OHM COAX,5.53 L	80009	175-3849-00
W232	175-2407-00			CABLE ASSY,RF:50 OHM COAX,5.0 INCH LONG	80009	175-2407-00
W236	175-2352-00			CABLE ASSY,RF:50 OHM COAX,7.87 INCH LONG	80009	175-2352-00
W240	175-2764-00			CABLE ASSY,RF:50 OHM COAX,9.4 INCH LONG	80009	175-2764-00
W240	-----			(OPTION 03 ONLY)		
W242	175-2372-00			CA ASSY,SP,ELEC:2.26 AWG,5.0 INCH LONG	80009	175-2372-00
W300	198-3944-01			WIRE SET,ELEC:	80009	198-3944-01
W320	175-2406-00			CABLE ASSY,RF:50 OHM COAX,3.0 INCH LONG	80009	175-2406-00
W340	175-2412-00			CABLE ASSY,RF:50 OHM COAX,12.0 INCH LONG	80009	175-2412-00
W344	175-2411-00			CABLE ASSY,RF:50 OHM COAX,17.0 INCH LONG	80009	175-2411-00
W346	175-2407-00	B040000		CABLE ASSY,RF:50 OHM COAX,5.0 INCH LONG	80009	175-2407-00
W348	175-2410-00			CABLE ASSY,RF:50 OHM COAX,10.0 INCH LONG	80009	175-2410-00
W350	175-2413-00			CABLE ASSY,RF:50 OHM COAX,13.0 INCH LONG	80009	175-2413-00
W350	-----			(OPTION 03 ONLY)		
W360	175-2409-00			CABLE ASSY,RF:50 OHM COAX,8.0 INCH LONG	80009	175-2409-00
W400	175-3631-00			CABLE ASSY,RF:50 OHM COAX,3.394 L	80009	175-3631-00
W401	175-3747-00			CABLE ASSY,RF:50 OHM COAX,4.599 L	80009	175-3747-00
W402	175-3632-00			CABLE ASSY,RF:50 OHM COAX,3.394 L	80009	175-3632-00
W403	175-3748-00			CABLE ASSY,RF:50 OHM COAX,4.245 L	80009	175-3748-00
W404	175-3633-00			CABLE ASSY,RF:50 OHM COAX,3.394 L	80009	175-3633-00
W405	175-3749-00			CABLE ASSY,RF:50 OHM COAX,3.856 L	80009	175-3749-00
W406	175-3634-00			CABLE ASSY,RF:50 OHM COAX,3.394 L	80009	175-3634-00
W407	175-3750-00			CABLE ASSY,RF:50 OHM COAX,4.051 L	80009	175-3750-00
W408	175-3635-00			CABLE ASSY,RF:50 OHM COAX,3.394 L	80009	175-3635-00
W409	175-3751-00			CABLE ASSY,RF:50 OHM COAX,4.596 L	80009	175-3751-00
W500	175-2406-00			CABLE ASSY,RF:50 OHM COAX,3.0 INCH LONG	80009	175-2406-00
W500	-----			(OPTION 03 ONLY)		
W502	175-2402-00			CABLE ASSY,RF:50 OHM COAX,12.0 INCH LONG	80009	175-2402-00
W502	-----			(OPTION 03 ONLY)		
W682	175-2418-00			CABLE ASSY,RF:50 OHM COAX,2.5 INCH LONG	80009	175-2418-00
W684	175-2415-00			CABLE ASSY,RF:50 OHM COAX,7.0 INCH LONG	80009	175-2415-00
W1021	175-2479-00			CABLE ASSY,RF:50 OHM COAX,5.5 INCH LONG	80009	175-2479-00
W1021	-----			(492P ONLY)		
W1037	198-4424-00			WIRE SET,ELEC:	80009	198-4424-00
W3010	175-3080-00			CA ASSY,SP ELEC:6.26 AWG,4.0 L	80009	175-3080-00
W3045	175-3557-00			CA ASSY,SP,ELEC:5.26 AWG,18.0 L,RIBBON	80009	175-3557-00
Y1030	158-0176-00			XTAL UNIT,SET:4,10MHZ,0.001%,MATCHED SER	33096	OBD
Y1030	-----			(OPT 3 ONLY. MTCHD SET W/Y1045,Y5012,Y7019)		
Y1045	158-0176-00			XTAL UNIT,SET:4,10MHZ,0.001%,MATCHED SER	33096	OBD
Y1045	-----			(OPT 3 ONLY. MTCHD SET W/Y1030,Y5012,Y7019)		
Y2036	119-0968-00			FILTER,BP:XTAL,6 POLE ML,10MHZ CTR FR	75378	OBD
Y2036	-----			(MATCHED SET WITH Y3046,Y5046)		

Replaceable Electrical Parts
492/492P Service Vol. 2 (B030000 & Up)

Component No.	Tektronix Part No.	Serial/Model No. Eff Dscont	Name & Description	Mfr Code	Mfr Part Number
Y2043	119-0969-00		FILTER,BP:XTAL,4 POLE ML,10MHZ CRT FR	75378	OBD
Y2043	-----		(MATCHED SET WITH Y5035)		
Y3046	119-0968-00		FILTER,BP:XTAL,6 POLE ML,10MHZ CTR FR	75378	OBD
Y3046	-----		(MATCHED SET WITH Y2036,Y5046)		
Y5012	158-0176-00		XTAL UNIT,SET:4,10MHZ,0.001%,MATCHED SER	33096	OBD
Y5012	-----		(OPT 3 ONLY. MTCHD SET W/Y1030,Y1045,Y7019)		
Y5035	119-0969-00		FILTER,BP:XTAL,4 POLE ML,10MHZ CRT FR	75378	OBD
Y5035	-----		(MATCHED SET WITH Y2043)		
Y5046	119-0968-00		FILTER,BP:XTAL,6 POLE ML,10MHZ CTR FR	75378	OBD
Y5046	-----		(MATCHED SET WITH Y2036,Y3046)		
Y7019	158-0176-00		XTAL UNIT,SET:4,10MHZ,0.001%,MATCHED SER	33096	OBD
Y7019	-----		(OPT 3 ONLY. MTCHD SET W/Y1030,Y1045,Y5012)		